

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :					
Product line : ODP NEMA Premium Efficiency Three-Phase		Product code : 10630037			
Frame : 364/5T	Insulation class : F	Duty cycle : Cont.(S1)	Ambient temperature : -20°C to +40°C	Altitude : 1000 m.a.s.l.	
Protection degree : IP23	Design : B	Cooling method : IC01 - ODP	Mounting : F-1	Rotation ¹ : Both (CW and CCW)	
		Starting method : Direct On Line	Approx. weight ³ : 359 kg	Moment of inertia (J) : 0.6555 kgm ²	
Output [HP]	60	60	60	60	
Poles	4	4	4	4	
Frequency [Hz]	60	50	50	50	
Rated voltage [V]	230/460	380	400	415	
Rated current [A]	140/69.9	80.9	78.6	76.6	
L. R. Amperes [A]	937/468	526	542	567	
LRC [A]	6.7x(Code G)	6.5x(Code G)	6.9x(Code G)	7.4x(Code H)	
No load current [A]	44.0/22.0	20.7	23.0	25.0	
Rated speed [RPM]	1780	1475	1480	1480	
Slip [%]	1.11	1.67	1.33	1.33	
Rated torque [kgfm]	24.5	29.5	29.4	29.4	
Locked rotor torque [%]	220	200	210	220	
Breakdown torque [%]	250	200	220	240	
Service factor	1.15	1.15	1.15	1.15	
Temperature rise	80 K	80 K	80 K	80 K	
Locked rotor time	27s (cold) 15s (hot)	37s (cold) 21s (hot)	34s (cold) 19s (hot)	30s (cold) 17s (hot)	
Noise level ²	68.0 dB(A)				
Efficiency (%)	25%	94.0	93.9	94.0	
	50%	94.5	94.5	94.5	
	75%	94.5	94.5	94.5	
	100%	95.0	95.0	95.0	
Power Factor	25%	0.50	0.57	0.52	
	50%	0.74	0.79	0.75	
	75%	0.83	0.87	0.84	
	100%	0.85	0.89	0.87	
Bearing type	: Drive end : 6314 C3	: Non drive end : 6314 C3	Foundation loads		
Sealing	: Without	: Without	Max. traction	: 614 kgf	
	: Bearing Seal	: Bearing Seal	Max. compression	: 973 kgf	
Lubrication interval	: 20000 h	: 20000 h			
Lubricant amount	: 27 g	: 27 g			
Lubricant type	: Mobil Polyrex EM				
Notes USABLE @208V 154A SF 1.00 SFA 154A					
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by				Page	Revision
Date	05/02/2024			1 / 5	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : ODP NEMA Premium Efficiency Three-Phase

Product code : 10630037

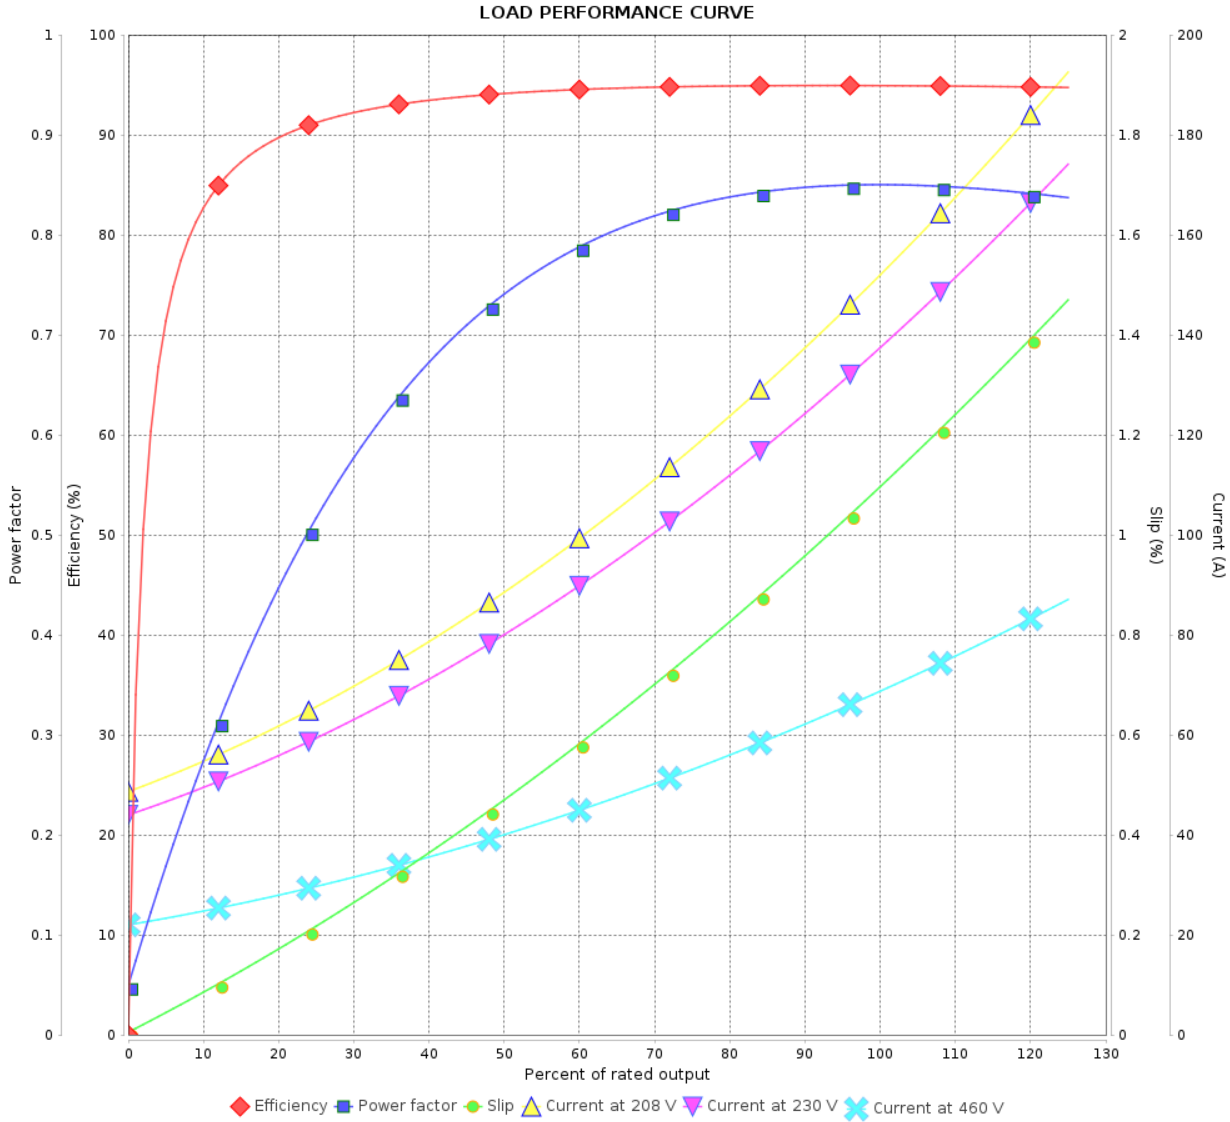

Performance : 230/460 V 60 Hz 4P

Rated current : 140/69.9 A
 LRC : 6.7
 Rated torque : 24.5 kgfm
 Locked rotor torque : 220 %
 Breakdown torque : 250 %
 Rated speed : 1780 rpm

Moment of inertia (J) : 0.6555 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : ODP NEMA Premium Efficiency Three-Phase

Product code : 10630037

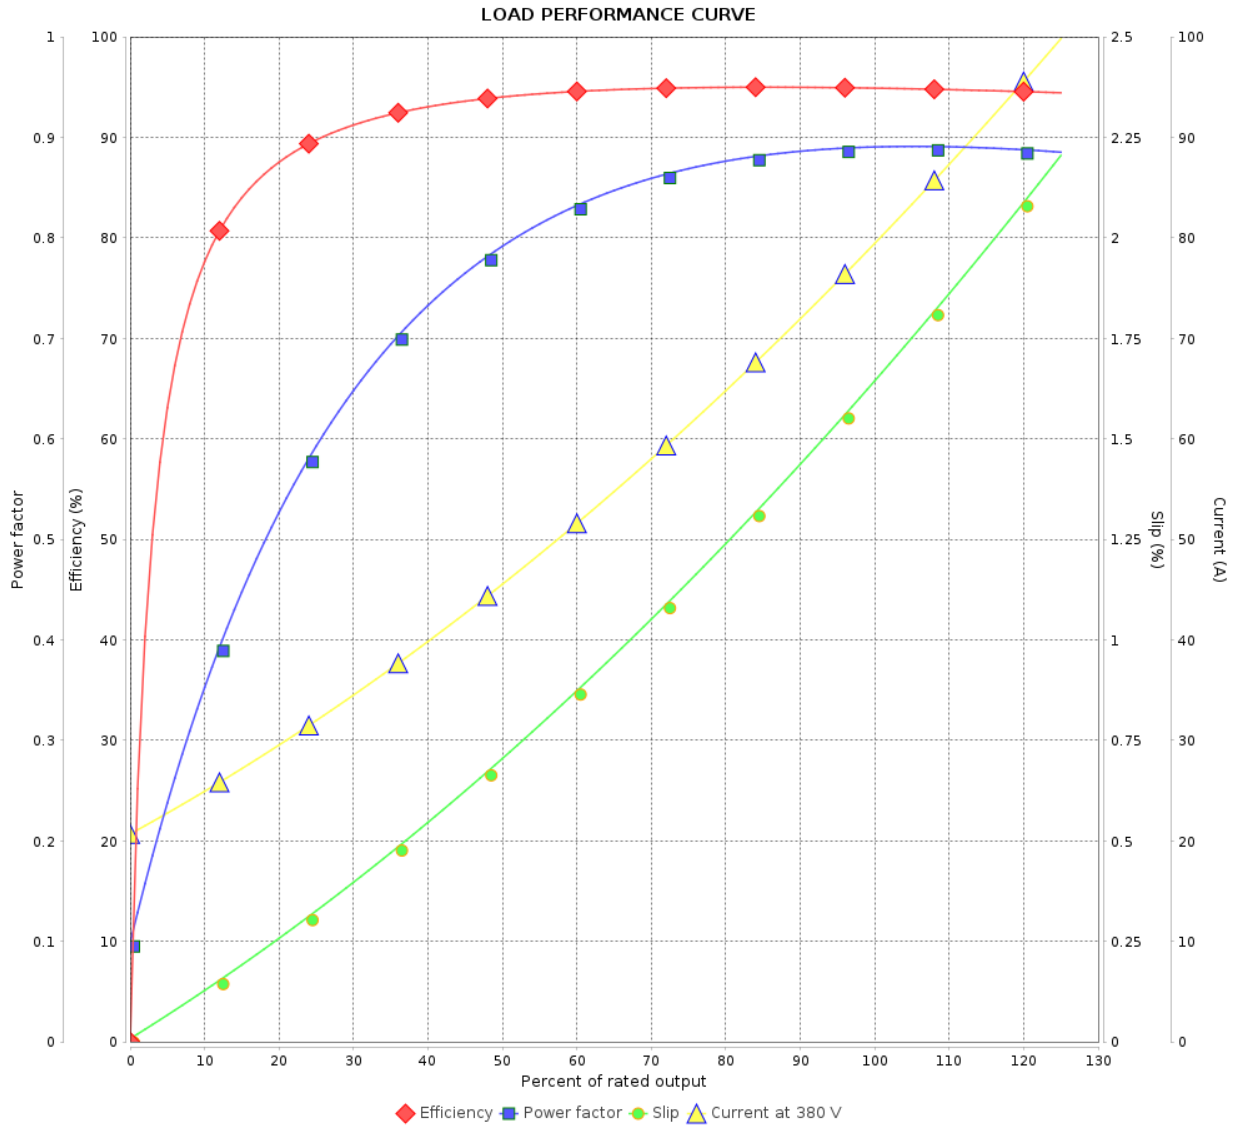

Performance : 380 V 50 Hz 4P IE3

Rated current : 80.9 A
 LRC : 6.5
 Rated torque : 29.5 kgfm
 Locked rotor torque : 200 %
 Breakdown torque : 200 %
 Rated speed : 1475 rpm

Moment of inertia (J) : 0.6555 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date				
		3 / 5		

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : ODP NEMA Premium Efficiency Three-Phase

Product code : 10630037

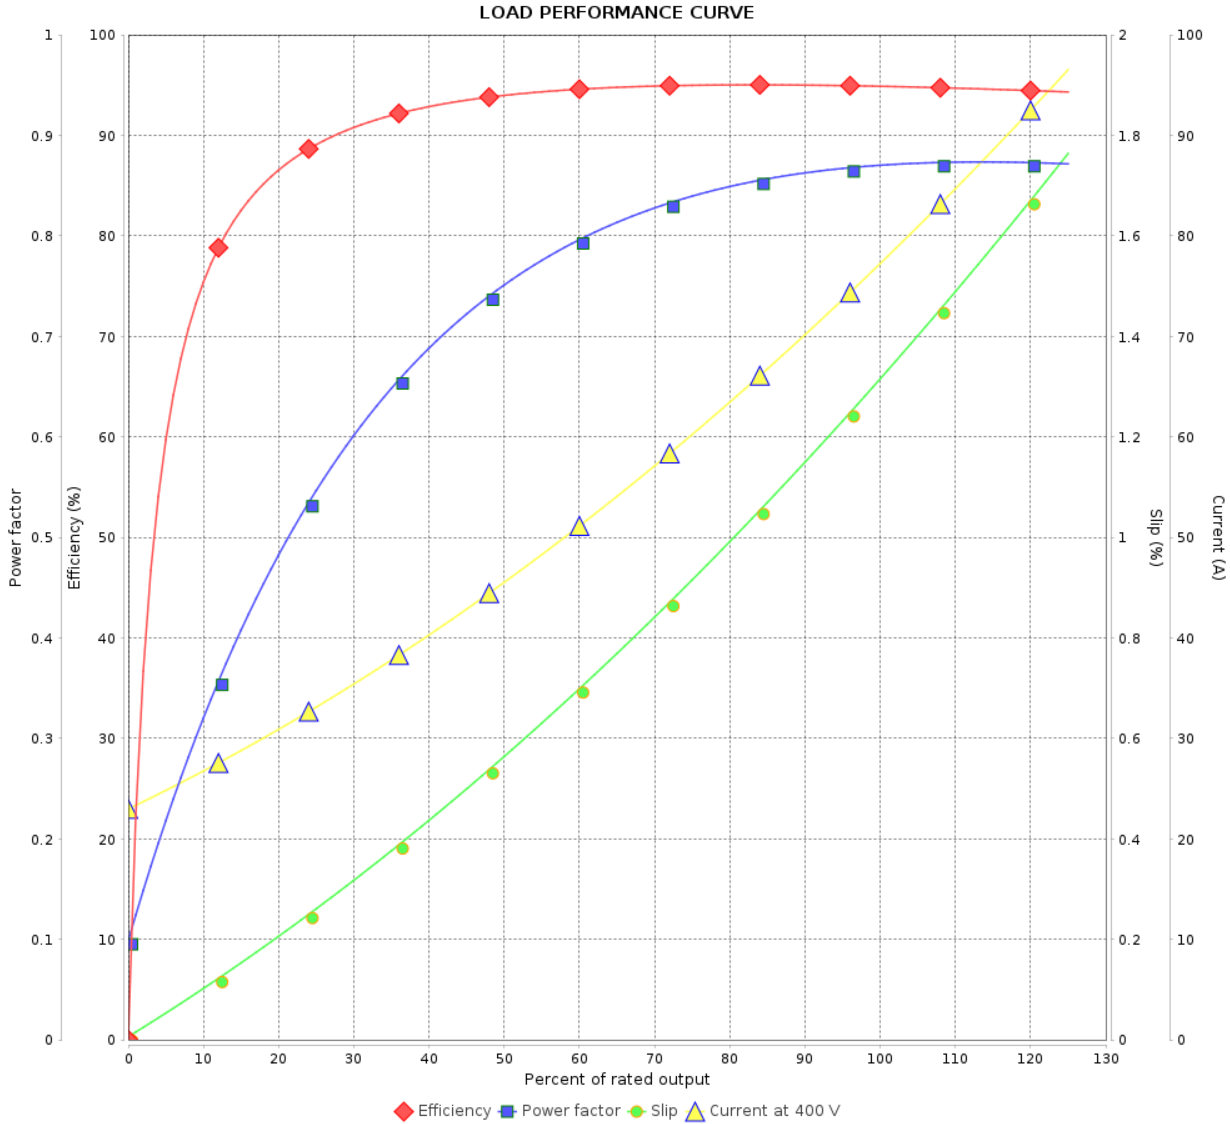

Performance : 400 V 50 Hz 4P IE3

Rated current : 78.6 A
 LRC : 6.9
 Rated torque : 29.4 kgfm
 Locked rotor torque : 210 %
 Breakdown torque : 220 %
 Rated speed : 1480 rpm

Moment of inertia (J) : 0.6555 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : ODP NEMA Premium Efficiency Three-Phase

Product code : 10630037

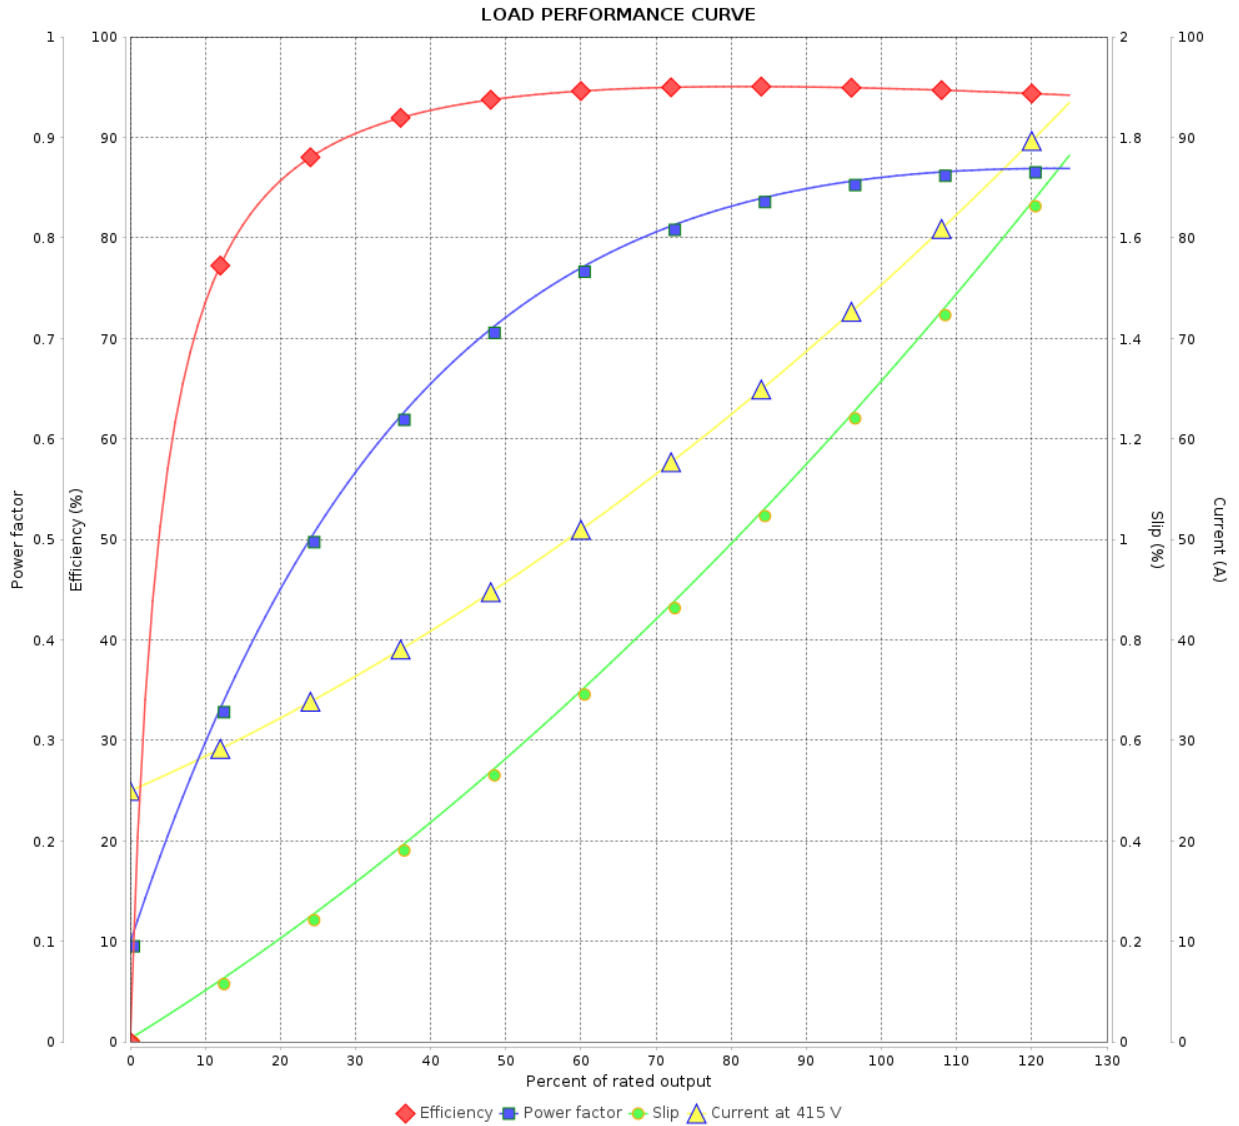

Performance : 415 V 50 Hz 4P IE3

Rated current : 76.6 A
 LRC : 7.4
 Rated torque : 29.4 kgfm
 Locked rotor torque : 220 %
 Breakdown torque : 240 %
 Rated speed : 1480 rpm

Moment of inertia (J) : 0.6555 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by				Page 5 / 5
Checked by				
Date	05/02/2024			