

# DATA SHEET



## Three Phase Induction Motor - Squirrel Cage

Customer :					
Product line		: ODP NEMA Premium Efficiency Three-Phase		Product code : 10653263	
Frame	: 286TC	Locked rotor time	: 25s (cold) 14s (hot)		
Output	: 30 HP (22 kW)	Temperature rise	: 80 K		
Poles	: 4	Duty cycle	: Cont.(S1)		
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C		
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.		
Rated current	: 27.9 A	Protection degree	: IP23		
L. R. Amperes	: 184 A	Cooling method	: IC01 - ODP		
LRC	: 6.6x(Code G)	Mounting	: F-1		
No load current	: 9.68 A	Rotation <sup>1</sup>	: Both (CW and CCW)		
Rated speed	: 1770 rpm	Noise level <sup>2</sup>	: 63.0 dB(A)		
Slip	: 1.67 %	Starting method	: Direct On Line		
Rated torque	: 12.3 kgfm	Approx. weight <sup>3</sup>	: 190 kg		
Locked rotor torque	: 240 %				
Breakdown torque	: 270 %				
Insulation class	: F				
Service factor	: 1.15				
Moment of inertia (J)	: 0.2063 kgm <sup>2</sup>				
Design	: B				
Output	50%	75%	100%	Foundation loads	
Efficiency (%)	93.6	94.1	94.1	Max. traction : 380 kgf	
Power Factor	0.70	0.80	0.84	Max. compression : 570 kgf	
		<u>Drive end</u>	<u>Non drive end</u>		
Bearing type	:	6311 Z C3	6211 Z C3		
Sealing	:	Without Bearing Seal	Without Bearing Seal		
Lubrication interval	:	20000 h	20000 h		
Lubricant amount	:	18 g	11 g		
Lubricant type	:	Mobil Polyrex EM			
Notes:					
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by				Page	Revision
Date	04/05/2024			1 / 2	

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : ODP NEMA Premium Efficiency Three-Phase

Product code : 10653263

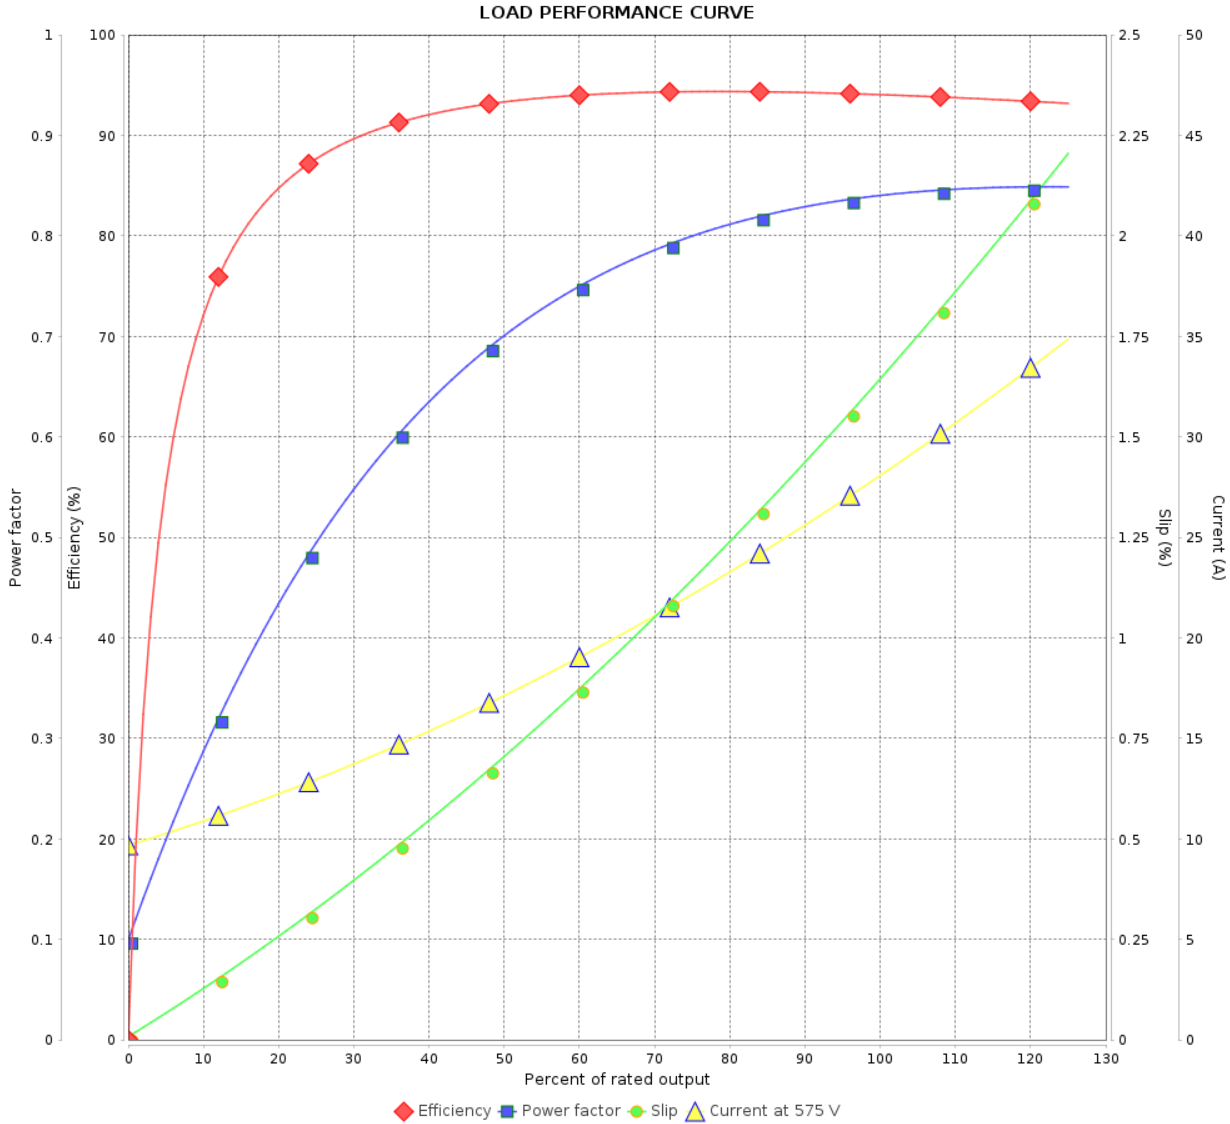

Performance : 575 V 60 Hz 4P

Rated current : 27.9 A  
 LRC : 6.6  
 Rated torque : 12.3 kgfm  
 Locked rotor torque : 240 %  
 Breakdown torque : 270 %  
 Rated speed : 1770 rpm

Moment of inertia (J) : 0.2063 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		2 / 2		
Date		04/05/2024		