

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Explosion Proof Standard Efficiency Three-Phase Product code : 10663463

Frame	: B56EX	Locked rotor time	: 27s (cold) 15s (hot)
Output	: 0.5 HP (0.37 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 208-230/460 V	Altitude	: 1000 m.a.s.l.
Rated current	: 1.80-1.63/0.812 A	Protection degree	: IP44
L. R. Amperes	: 12.2-11.0/5.52 A	Cooling method	: IC411 - TEFC
LRC	: 6.8x(Code K)	Mounting	: F-1
No load current	: 1.38-1.25/0.625 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 1755 rpm	Noise level ²	: 50.0 dB(A)
Slip	: 2.50 %	Vibration	: A
Rated torque	: 0 kgfm	Starting method	: Direct On Line
Locked rotor torque	: 220 %	Approx. weight ³	: 15.0 kg
Breakdown torque	: 330 %		: 207N (ISO 12944 - C2)
Insulation class	: B		: RAL 7022
Service factor	: 1.15		
Moment of inertia (J)	: 0.0034 kgm ²		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	70.0	75.5	77.5	Max. traction	: 14 kgf
Power Factor	0.52	0.64	0.73	Max. compression	: 29 kgf

		<u>Drive end</u>	<u>Non drive end</u>
Bearing type	:	6203 ZZ	6203 ZZ
Sealing	:	Without Bearing Seal	Without Bearing Seal
Lubrication interval	:	-	-
Lubricant amount	:	-	-
Lubricant type	:	Mobil Polyrex EM	

Notes
USABLE @208V SF 1.00

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 1 / 3		
Checked by				
Date	05/10/2026			
			Revision	

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Thermal protection

ID	Application	Type	Quantity	Sensing Temperature
1	Winding	Thermostat - 2 wires	1 x Phase	130 °C

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				2 / 3	
Date	05/10/2026				


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Explosion Proof Standard Efficiency Three-Phase Product code : 10663463

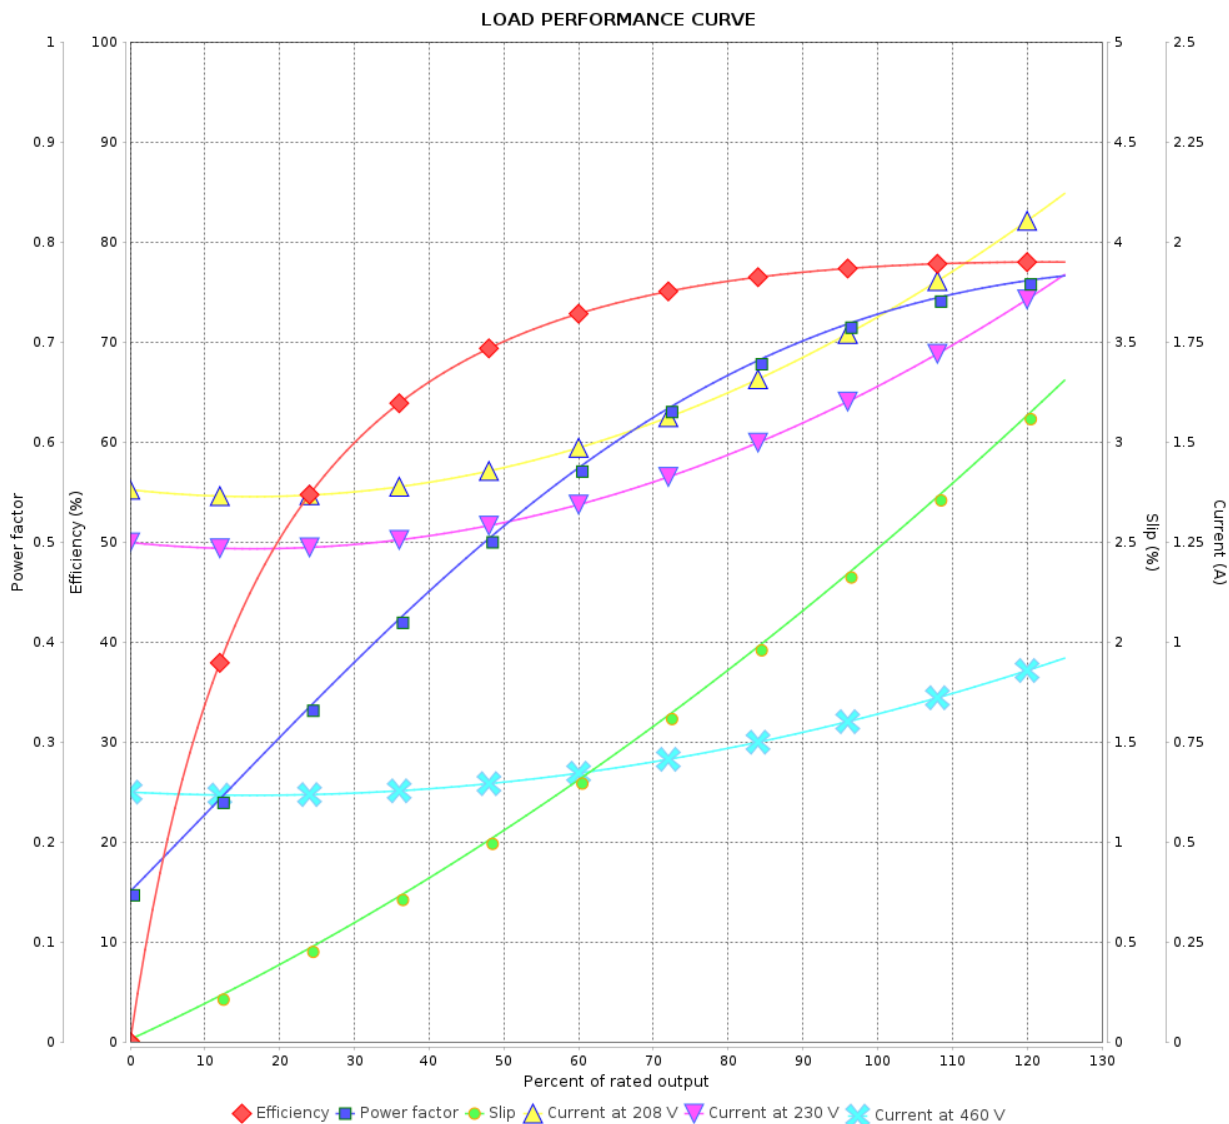

Performance : 208-230/460 V 60 Hz 4P

Rated current : 1.80-1.63/0.812 A
 LRC : 6.8
 Rated torque : 0 kgfm
 Locked rotor torque : 220 %
 Breakdown torque : 330 %
 Rated speed : 1755 rpm

Moment of inertia (J) : 0.0034 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : B
 Service factor :
 Temperature rise : 80 K

Rev.	Changes Summary		Performed	Checked	Date
Performed by		Page 3 / 3			Revision
Checked by					
Date	05/10/2026				