

# DATA SHEET



## Three Phase Induction Motor - Squirrel Cage

Customer :						
Product line		: Explosion Proof Standard Efficiency Three-Phase		Product code : 10687911		
Frame	:	B56CEX		Locked rotor time	: 27s (cold) 15s (hot)	
Output	:	0.5 HP (0.37 kW)		Temperature rise	: 80 K	
Poles	:	4		Duty cycle	: Cont.(S1)	
Frequency	:	60 Hz		Ambient temperature	: -20°C to +40°C	
Rated voltage	:	208-230/460 V		Altitude	: 1000 m.a.s.l.	
Rated current	:	1.80-1.63/0.812 A		Protection degree	: IP44	
L. R. Amperes	:	12.2-11.0/5.52 A		Cooling method	: IC411 - TEFC	
LRC	:	6.8x(Code K)		Mounting	: F-1	
No load current	:	1.38-1.25/0.625 A		Rotation <sup>1</sup>	: Both (CW and CCW)	
Rated speed	:	1755 rpm		Noise level <sup>2</sup>	: 50.0 dB(A)	
Slip	:	2.50 %		Starting method	: Direct On Line	
Rated torque	:	0.207 kgfm		Approx. weight <sup>3</sup>	: 15.6 kg	
Locked rotor torque	:	220 %				
Breakdown torque	:	330 %				
Insulation class	:	B				
Service factor	:	1.15				
Moment of inertia (J)	:	0.0034 kgm <sup>2</sup>				
Output	50%	75%	100%	Foundation loads		
Efficiency (%)	70.0	75.5	77.5	Max. traction	: 14 kgf	
Power Factor	0.52	0.64	0.73	Max. compression	: 29 kgf	
		<u>Drive end</u>		<u>Non drive end</u>		
Bearing type	:	6203 ZZ		6203 ZZ		
Sealing	:	Without Bearing Seal		Without Bearing Seal		
Lubrication interval	:	-		-		
Lubricant amount	:	-		-		
Lubricant type	:	Mobil Polyrex EM				
Notes: USABLE @208V SF 1.00						
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.			
Rev.	Changes Summary			Performed	Checked	Date
Performed by						
Checked by					Page	Revision
Date	15/01/2024				1 / 3	

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

### Thermal protection

ID	Application	Type	Quantity	Sensing Temperature
1	Winding	Thermostat - 2 wires	1 x Phase	130 °C

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	15/01/2024		2 / 3	


# LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : Explosion Proof Standard Efficiency Three-Phase      Product code : 10687911

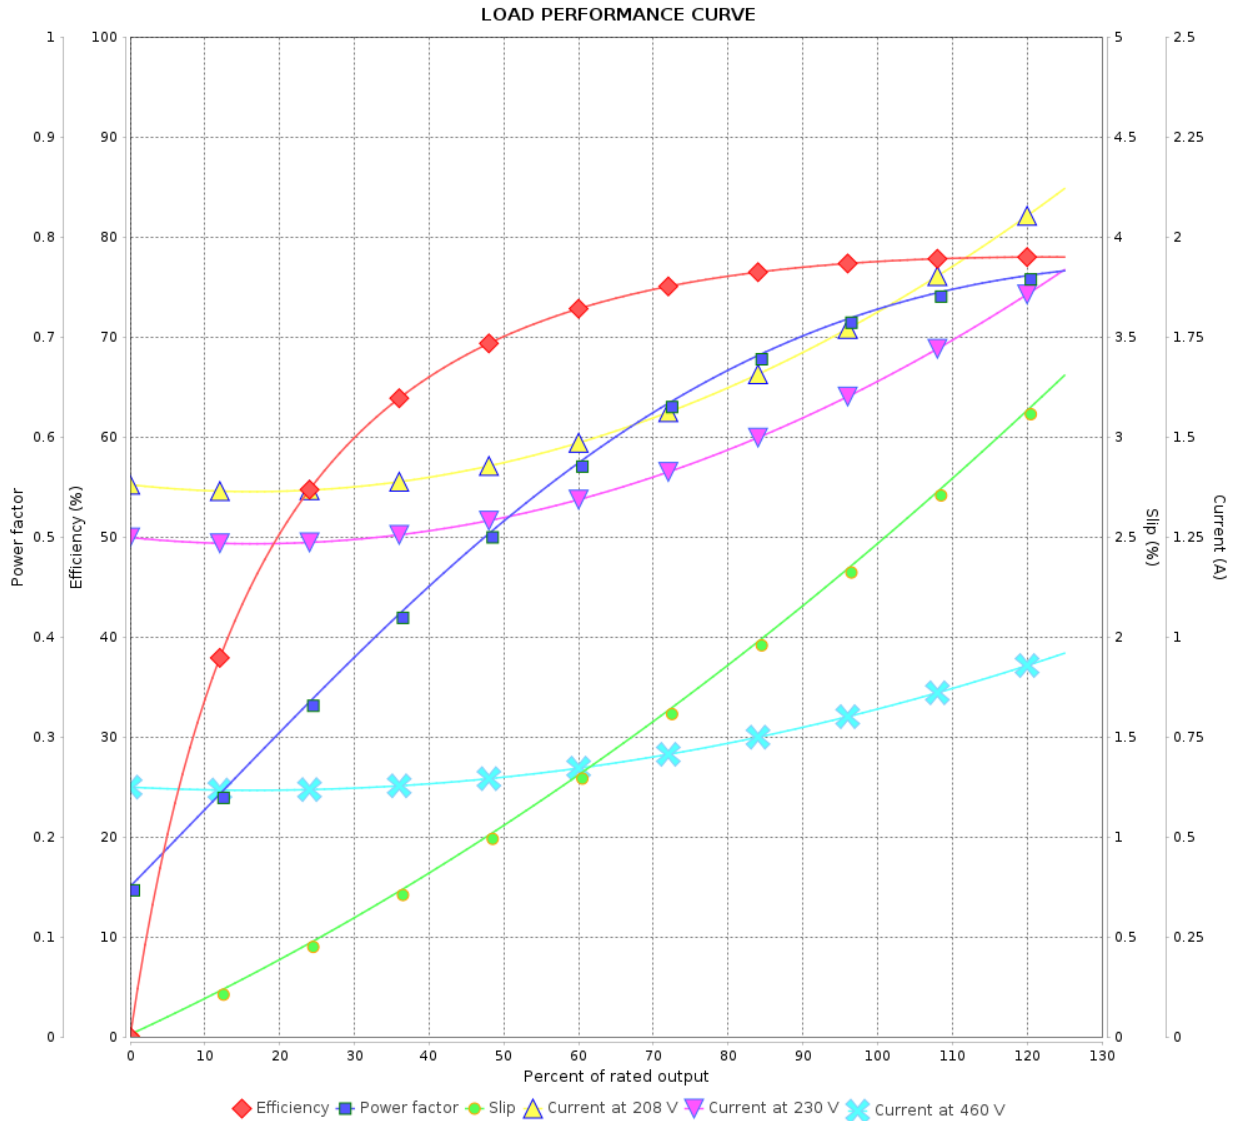

Performance : 208-230/460 V 60 Hz 4P

Rated current : 1.80-1.63/0.812 A  
 LRC : 6.8  
 Rated torque : 0.207 kgfm  
 Locked rotor torque : 220 %  
 Breakdown torque : 330 %  
 Rated speed : 1755 rpm

Moment of inertia (J) : 0.0034 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : B  
 Service factor :  
 Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				