

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : General NEMA Premium Efficiency Three-Phase Product code : 10702603

LOAD PERFORMANCE CURVE

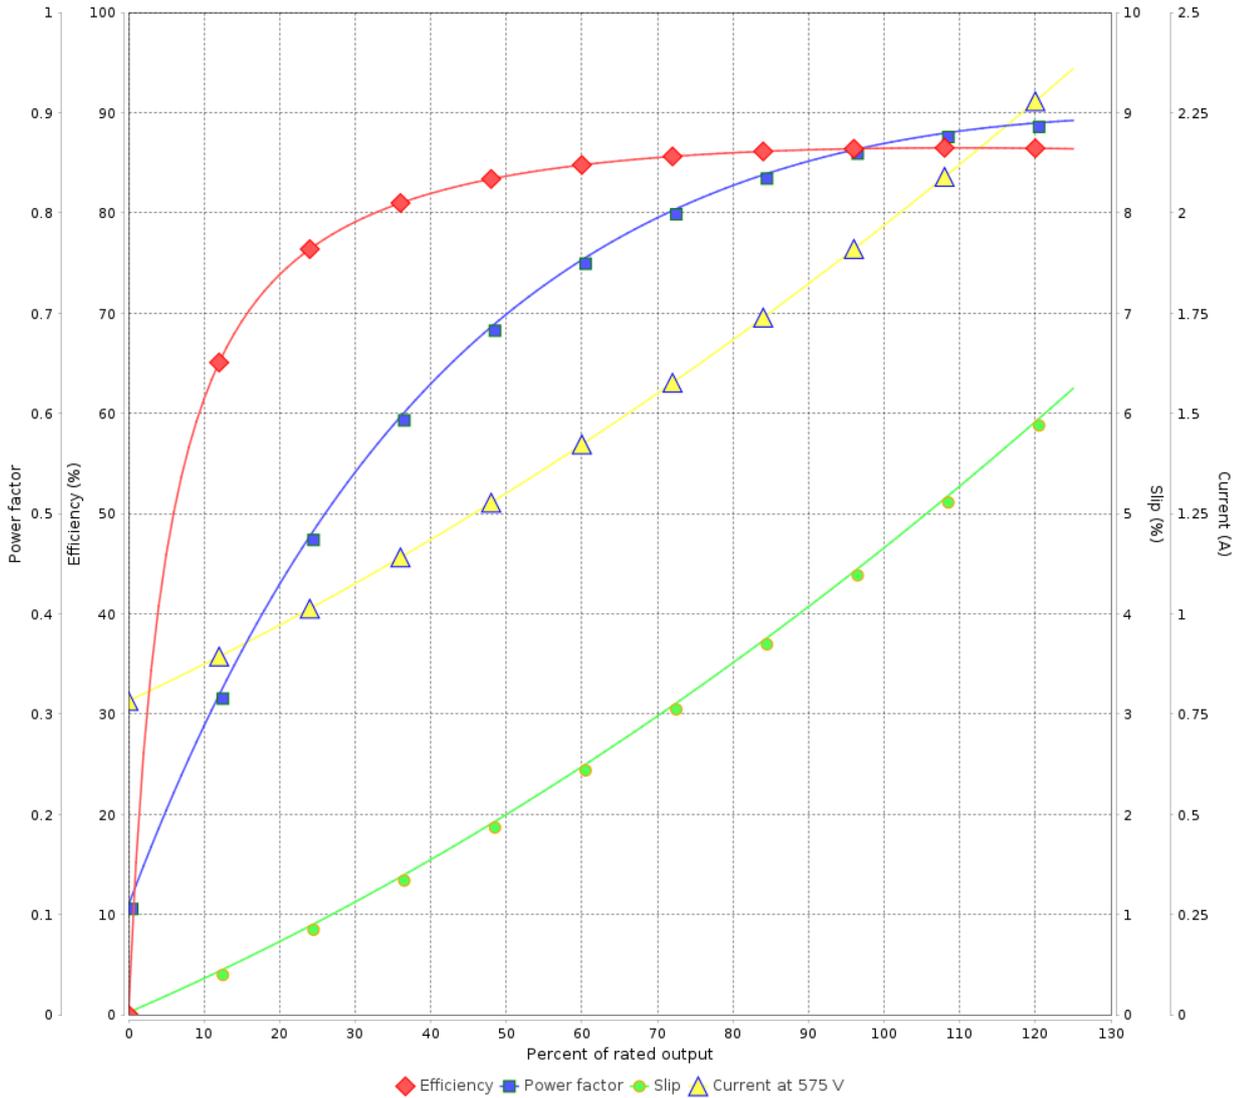

Performance : 575 V 60 Hz 2P

Rated current	: 2.00 A	Moment of inertia (J)	: 0.0025 kgm ²
LRC	: 9.5	Duty cycle	: Cont.(S1)
Rated torque	: 0.423 kgfm	Insulation class	: F
Locked rotor torque	: 450 %	Service factor	: 1.15
Breakdown torque	: 350 %	Temperature rise	: 80 K
Rated speed	: 3430 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	19/10/2024			