

DATA SHEET



Single Phase Induction Motor - Squirrel Cage

Customer :						
Product line : Centrifugal Pump Single-Phase Start Capacitor		Product code : 10744758				
Frame : B56C Output : 0.33 HP (0.25 kW) Poles : 2 Frequency : 60 Hz Rated voltage : 115/208-230 V Rated current : 5.70/2.70-2.85 A L. R. Amperes : 33.1/15.7-16.5 A LRC : 5.8x(Code N) No load current : 4.40/1.90-2.20 A Rated speed : 3490 rpm Slip : 3.06 % Rated torque : 0.069 kgfm Locked rotor torque : 370 % Breakdown torque : 320 % Insulation class : B Service factor : 1.15 Moment of inertia (J) : 0.0012 kgm ²	Locked rotor time : 10s (cold) 6s (hot) Temperature rise : 80 K Duty cycle : Cont.(S1) Ambient temperature : -20°C to +40°C Altitude : 1000 m.a.s.l. Protection degree : IP55 Cooling method : IC411 - TEFC Mounting : F-1 Rotation ¹ : Both (CW and CCW) Noise level ² : 55.0 dB(A) Starting method : Direct On Line Approx. weight ³ : 10.7 kg					
Output	25%	50%	75%	100%	Foundation loads Max. traction : 1 kgf Max. compression : 12 kgf	
Efficiency (%)	37.3	40.0	49.0	53.0		
Power Factor	0.32	0.56	0.64	0.70		
Bearing type	:	<u>Drive end</u> 6203 2RS		<u>Non drive end</u> 6202 2RS		
Sealing	:	V'Ring		V'Ring		
Lubrication interval	:	-		-		
Lubricant amount	:	-		-		
Lubricant type	:	Mobil Polyrex EM				
Notes:						
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.			
Rev.	Changes Summary			Performed	Checked	Date
Performed by						
Checked by					Page	Revision
Date	14/01/2024				1 / 2	

LOAD PERFORMANCE CURVE

Single Phase Induction Motor - Squirrel Cage




Customer :

Product line : Centrifugal Pump Single-Phase Start Capacitor

Product code : 10744758

LOAD PERFORMANCE CURVE

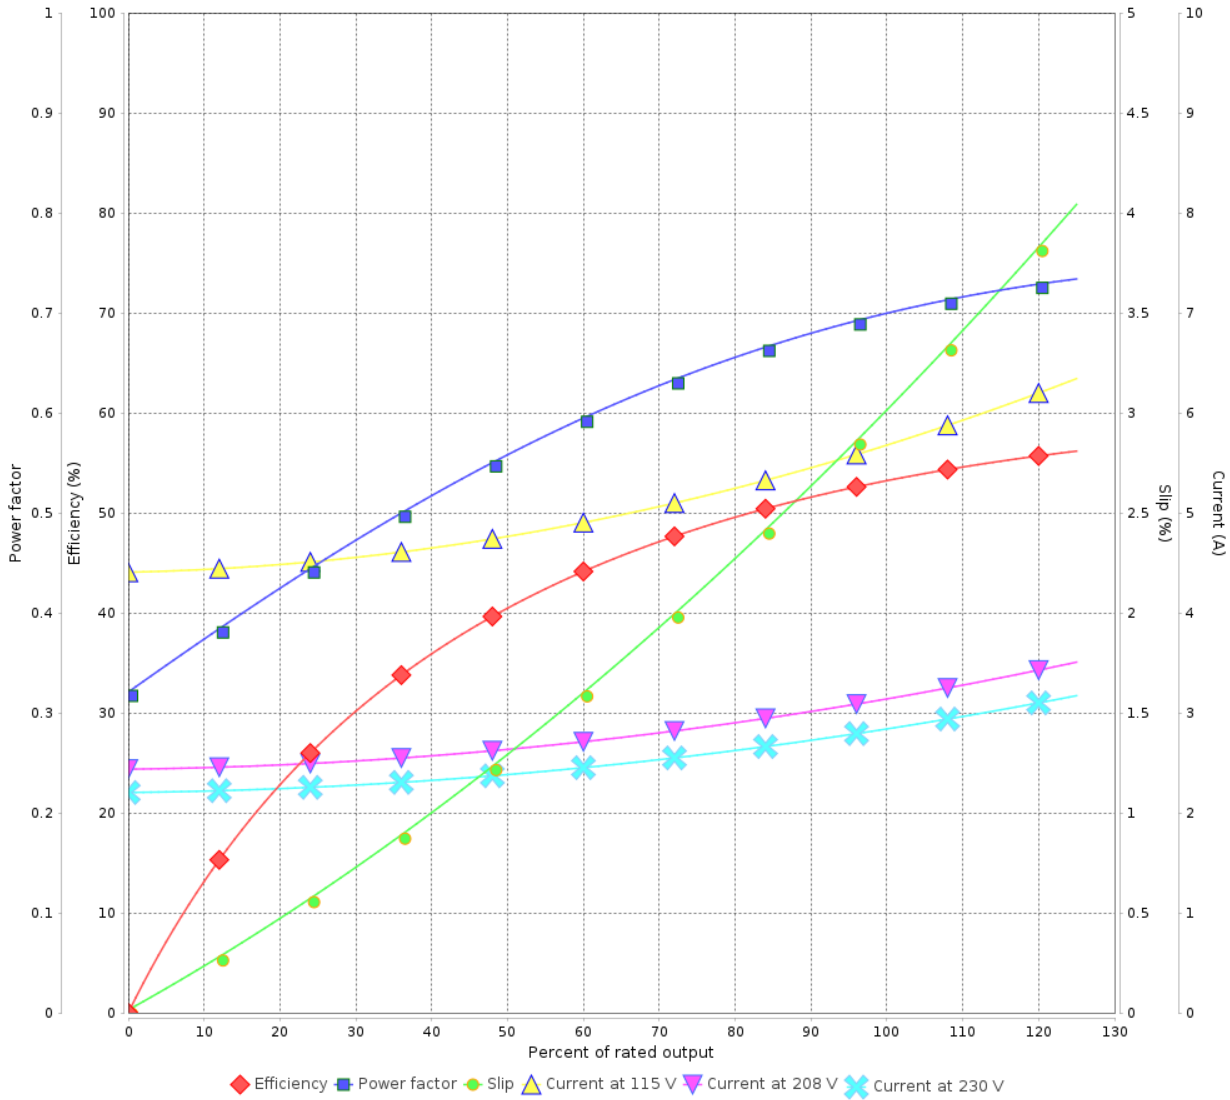

Performance : 115/208-230 V 60 Hz 2P

Rated current : 5.70/2.70-2.85 A
 LRC : 5.8
 Rated torque : 0.069 kgfm
 Locked rotor torque : 370 %
 Breakdown torque : 320 %
 Rated speed : 3490 rpm

Moment of inertia (J) : 0.0012 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : B
 Service factor :
 Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				