

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : Saw Arbor Motor Standard Efficiency Three-Phase Product code : 10793851

Frame	: 90L/MS	Locked rotor time	: 12s (cold) 7s (hot)
Output	: 10 HP (7.5 kW)	Temperature rise	: 80 K
Poles	: 2	Duty cycle	: S1
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 9.83 A	Protection degree	: IP54
L. R. Amperes	: 85.5 A	Cooling method	: IC411 - TEFC
LRC	: 8.7	Mounting	: B3R(D)
No load current	: 3.60 A	Rotation ¹	: CW
Rated speed	: 3480 rpm	Noise level ²	: 68.0 dB(A)
Slip	: 3.33 %	Starting method	: Direct On Line
Rated torque	: 2.09 kgfm	Approx. weight ³	: 75.9 kg
Locked rotor torque	: 400 %		
Breakdown torque	: 420 %		
Insulation class	: F		
Service factor	: 1.15		
Moment of inertia (J)	: 0.0140 kgm ²		
Design	: N		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	82.0	84.5	85.0	Max. traction	: 180 kgf
Power Factor	0.77	0.86	0.90	Max. compression	: 256 kgf

	<u>Drive end</u>	<u>Non drive end</u>
Bearing type	: 6308 ZZ	6208 ZZ
Sealing	: Without Bearing Seal	Without Bearing Seal
Lubrication interval	: -	-
Lubricant amount	: -	-
Lubricant type	: Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	26/10/2024		1 / 2	

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : Saw Arbor Motor Standard
Efficiency Three-Phase

Product code : 10793851

LOAD PERFORMANCE CURVE

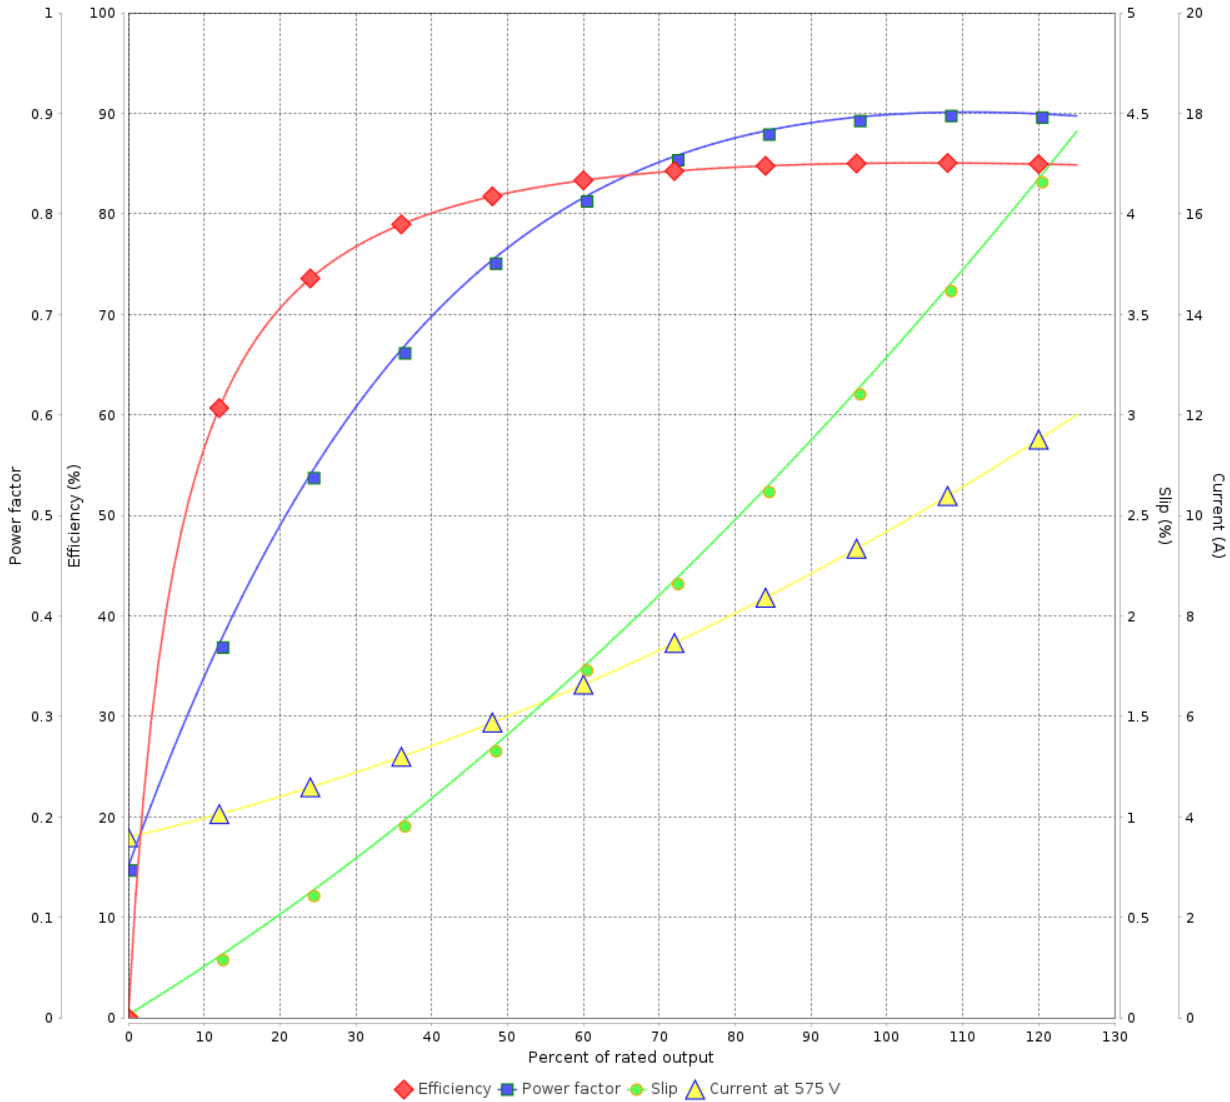

Performance : 575 V 60 Hz 2P

Rated current	: 9.83 A	Moment of inertia (J)	: 0.0140 kgm ²
LRC	: 8.7	Duty cycle	: S1
Rated torque	: 2.09 kgfm	Insulation class	: F
Locked rotor torque	: 400 %	Service factor	: 1.15
Breakdown torque	: 420 %	Temperature rise	: 80 K
Rated speed	: 3480 rpm	Design	: N

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by			2 / 2	
Date	26/10/2024			