

# DATA SHEET



## Single Phase Induction Motor - Squirrel Cage

Customer :

Product line : Wjet Pump Single-Phase Start Capacitor      Product code : 10877766

Frame	: E56C	Locked rotor time	: 10s (cold) 6s (hot)
Output	: 2 HP (1.5 kW)	Temperature rise	: 80 K
Poles	: 2	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 115/208-230 V	Altitude	: 1000 m.a.s.l.
Rated current	: 23.0/11.6-11.5 A	Protection degree	: IP21
L. R. Amperes	: 136/68.4-67.9 A	Cooling method	: IC01 - ODP
LRC	: 5.9x(Code J)	Mounting	: F-1
No load current	: 15.0/6.47-7.50 A	Rotation <sup>1</sup>	: Both (CW and CCW)
Rated speed	: 3450 rpm	Starting method	: Direct On Line
Slip	: 4.17 %	Approx. weight <sup>2</sup>	: 14.8 kg
Rated torque	: 0.421 kgfm		
Locked rotor torque	: 160 %		
Breakdown torque	: 220 %		
Insulation class	: B		
Service factor	: 1.20		
Moment of inertia (J)	: 0.0185 kgm <sup>2</sup>		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	65.0	70.0	70.0	Max. traction	: 22 kgf
Power Factor	0.63	0.73	0.80	Max. compression	: 37 kgf

		<u>Drive end</u>	<u>Non drive end</u>
Bearing type	:	6203 2RS	6203 2RS
Sealing	:	Slinger	Without Bearing Seal
Lubrication interval	:	-	-
Lubricant amount	:	-	-
Lubricant type	:	Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.  
 (1) Looking the motor from the shaft end.  
 (2) Measured at 1m and with tolerance of +3dB(A).  
 (3) Approximate weight subject to changes after manufacturing process.  
 (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		1 / 2		
Date	24/10/2024			

# LOAD PERFORMANCE CURVE

Single Phase Induction Motor - Squirrel Cage




Customer :

Product line : Wjet Pump Single-Phase Start Capacitor

Product code : 10877766

LOAD PERFORMANCE CURVE

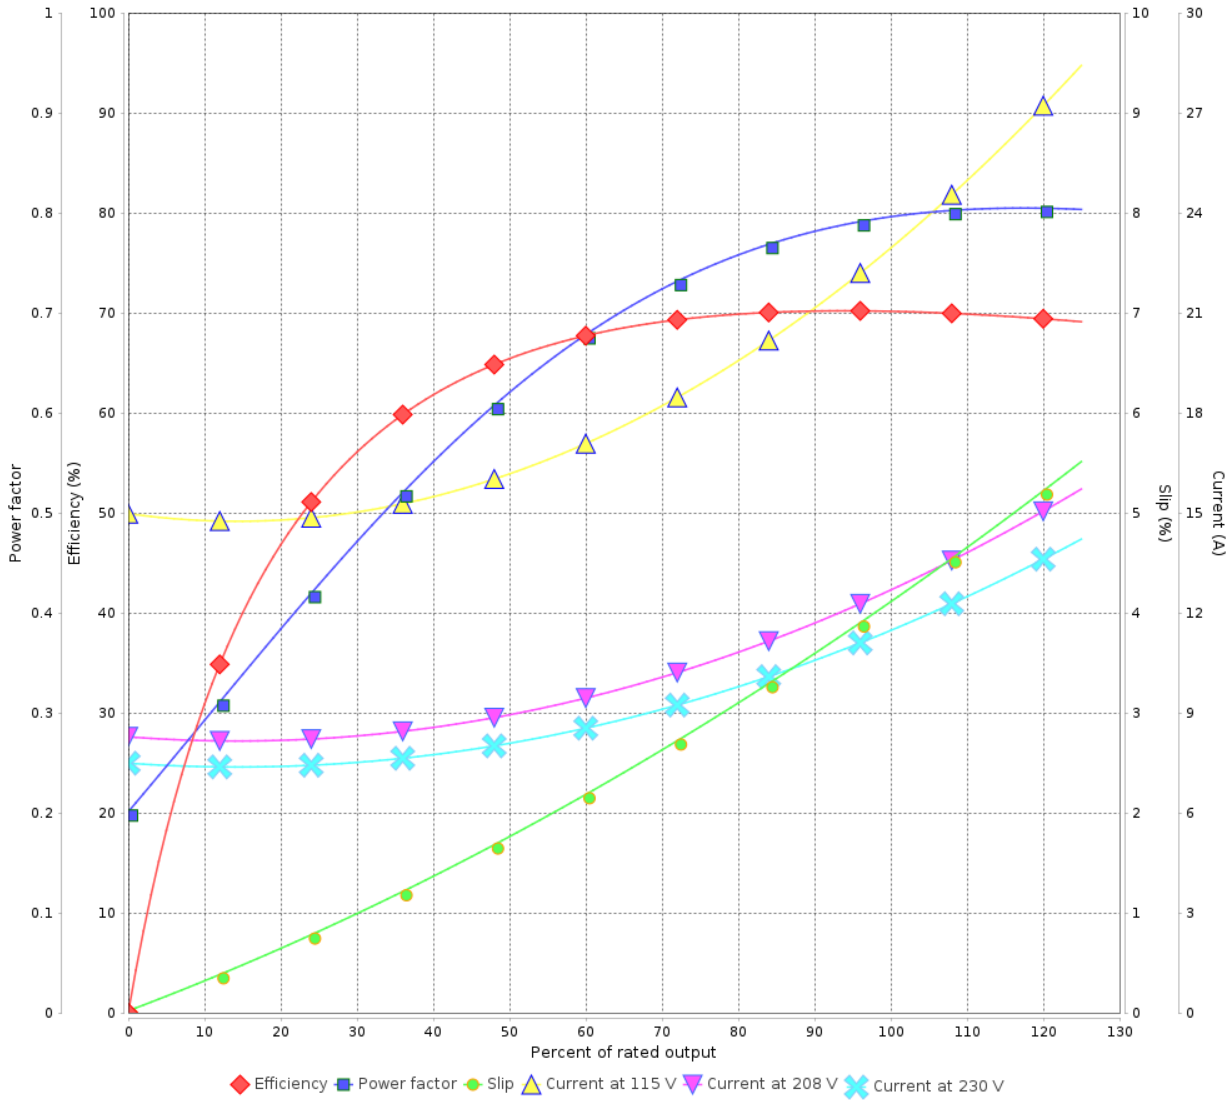

Performance : 115/208-230 V 60 Hz 2P

Rated current : 23.0/11.6-11.5 A  
 LRC : 5.9  
 Rated torque : 0.421 kgfm  
 Locked rotor torque : 160 %  
 Breakdown torque : 220 %  
 Rated speed : 3450 rpm

Moment of inertia (J) : 0.0185 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : B  
 Service factor :  
 Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				