

DATA SHEET

Single Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : Compressor Duty Single-Phase Product code : 10970567

Frame	: D56	Locked rotor time	: 10s (cold) 6s (hot)
Output	: 1.5 HP (1.1 kW)	Temperature rise	: 80 K
Frequency	: 60 Hz	Duty cycle	: Cont.(S1)
Rated voltage	: 115/208-230 V	Ambient temperature	: -20°C to +40°C
Poles	: 2	Altitude	: 1000 m.a.s.l.
Rated current	: 16.8/9.20-8.40 A	Protection degree	: IP21
	: 5.2x(Code H)	Cooling method	: IC01 - ODP
Rated speed	: 3430 rpm	Mounting	: F-1
Rated torque	: 0.317 kgfm	Rotation ¹	: Both (CW and CCW)
Insulation class	: B	Starting method	: Direct On Line
Service factor	: 1.00	Approx. weight ³	: 13.0 kg
Moment of inertia (J)	: 0.0018 kgm ²		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	64.0	68.0	68.0	Max. traction	: 12 kgf
Power Factor	0.68	0.78	0.84	Max. compression	: 25 kgf

	Drive end	Non drive end
Bearing type	: 6204 ZZ	: 6203 ZZ
Sealing	: Without Bearing Seal	: Without Bearing Seal
Lubrication interval	: -	: -
Lubricant amount	: -	: -
Lubricant type	: Mobil Polyrex EM	

Notes

<p>This revision replaces and cancel the previous one, which must be eliminated.</p> <p>(1) Looking the motor from the shaft end.</p> <p>(2) Measured at 1m and with tolerance of +3dB(A).</p> <p>(3) Approximate weight subject to changes after manufacturing process.</p> <p>(4) At 100% of full load.</p>	<p>These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.</p>
---	---

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	30/05/2026		1 / 2	


LOAD PERFORMANCE CURVE

Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : Compressor Duty Single-Phase Product code : 10970567

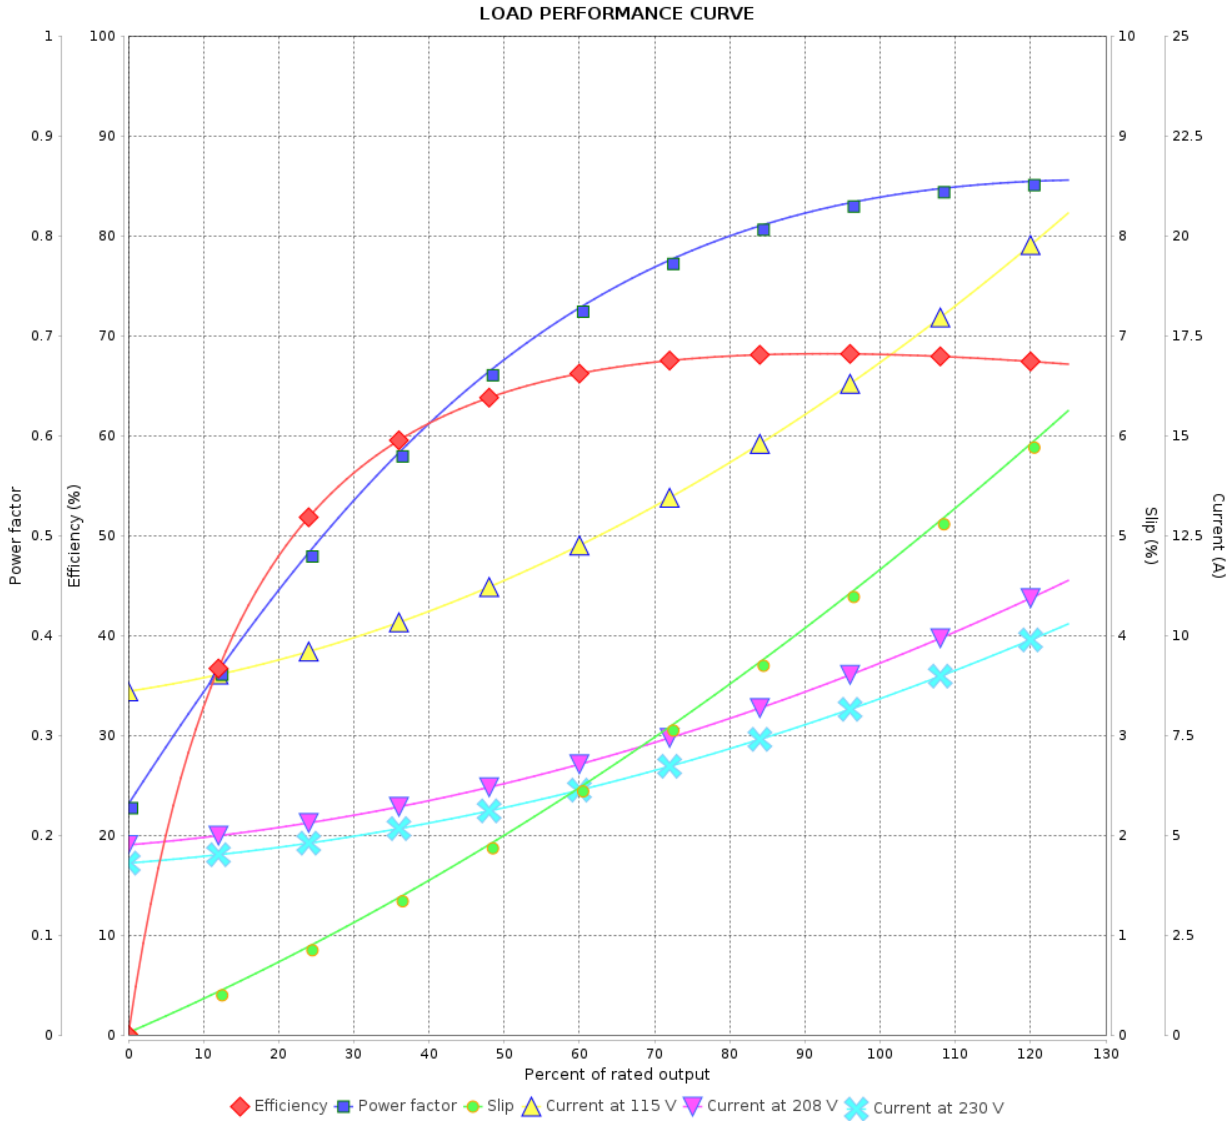

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	30/05/2026			