

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :							
Product line	: Close Coupled Pump NEMA Premium Efficiency Three-Phase	Product code :	11064347				
Frame	: 184JM	Cooling method	: IC01 - ODP				
Insulation class	: F	Mounting	: F-1				
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)				
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line				
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 33.5 kg				
Protection degree	: IP21	Moment of inertia (J)	: 0.0069 kgm ²				
Design	: B						
Output [HP]	7.5	5.5	5.5	5.5	7.5	7.5	7.5
Poles	2	2	2	2	2	2	2
Frequency [Hz]	60	50	50	50	50	50	50
Rated voltage [V]	230/460	380	400	415	380	400	415
Rated current [A]	17.9/8.97	7.93	7.80	7.70	11.1	10.6	10.3
L. R. Amperes [A]	126/62.8	56.3	60.1	65.5	57.7	61.5	63.9
LRC [A]	7.0x(Code H)	7.1x(Code H)	7.7x(Code J)	8.5x(Code K)	5.2x(Code F)	5.8x(Code G)	6.2x(Code G)
No load current [A]	5.40/2.70	2.40	2.80	3.20	2.40	2.80	3.20
Rated speed [RPM]	3480	2890	2900	2910	2835	2855	2870
Slip [%]	3.33	3.67	3.33	3.00	5.50	4.83	4.33
Rated torque [kgfm]	1.56	1.38	1.38	1.37	1.92	1.91	1.90
Locked rotor torque [%]	210	210	250	260	150	180	190
Breakdown torque [%]	280	310	330	360	220	240	260
Service factor	1.15	1.15	1.15	1.15	1.00	1.00	1.00
Temperature rise	105 K	105 K	105 K	105 K	105 K	105 K	105 K
Locked rotor time	21s (cold) 12s (hot)	25s (cold) 14s (hot)	21s (cold) 12s (hot)	18s (cold) 10s (hot)	25s (cold) 14s (hot)	21s (cold) 12s (hot)	18s (cold) 10s (hot)
Noise level ²	65.0 dB(A)						
Efficiency (%)	25%						
	50%	87.5	84.7	85.1	84.8	83.5	86.5
	75%	88.5	85.7	86.6	86.6	84.0	86.5
	100%	88.5	88.1	88.1	88.1	84.7	85.5
Power Factor	25%						
	50%	0.73	0.71	0.65	0.61	0.79	0.75
	75%	0.83	0.81	0.77	0.74	0.87	0.84
	100%	0.87	0.87	0.84	0.82	0.89	0.88
Bearing type	: Drive end : 6207 ZZ Non drive end : 6205 ZZ	Foundation loads					
Sealing	: Without Bearing Seal	Max. traction	: 86 kgf				
	: Without Bearing Seal	Max. compression	: 120 kgf				
Lubrication interval	: -						
Lubricant amount	: -						
Lubricant type	: Mobil Polyrex EM						
Notes USABLE @208V 19.8A SF 1.15 SFA 22.8A							
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.		These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.					
Rev.	Changes Summary	Performed	Checked	Date			
Performed by							
Checked by			Page	Revision			
Date	13/01/2024		1 / 8				

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : Close Coupled Pump NEMA Premium
Efficiency Three-Phase

Product code : 11064347

LOAD PERFORMANCE CURVE

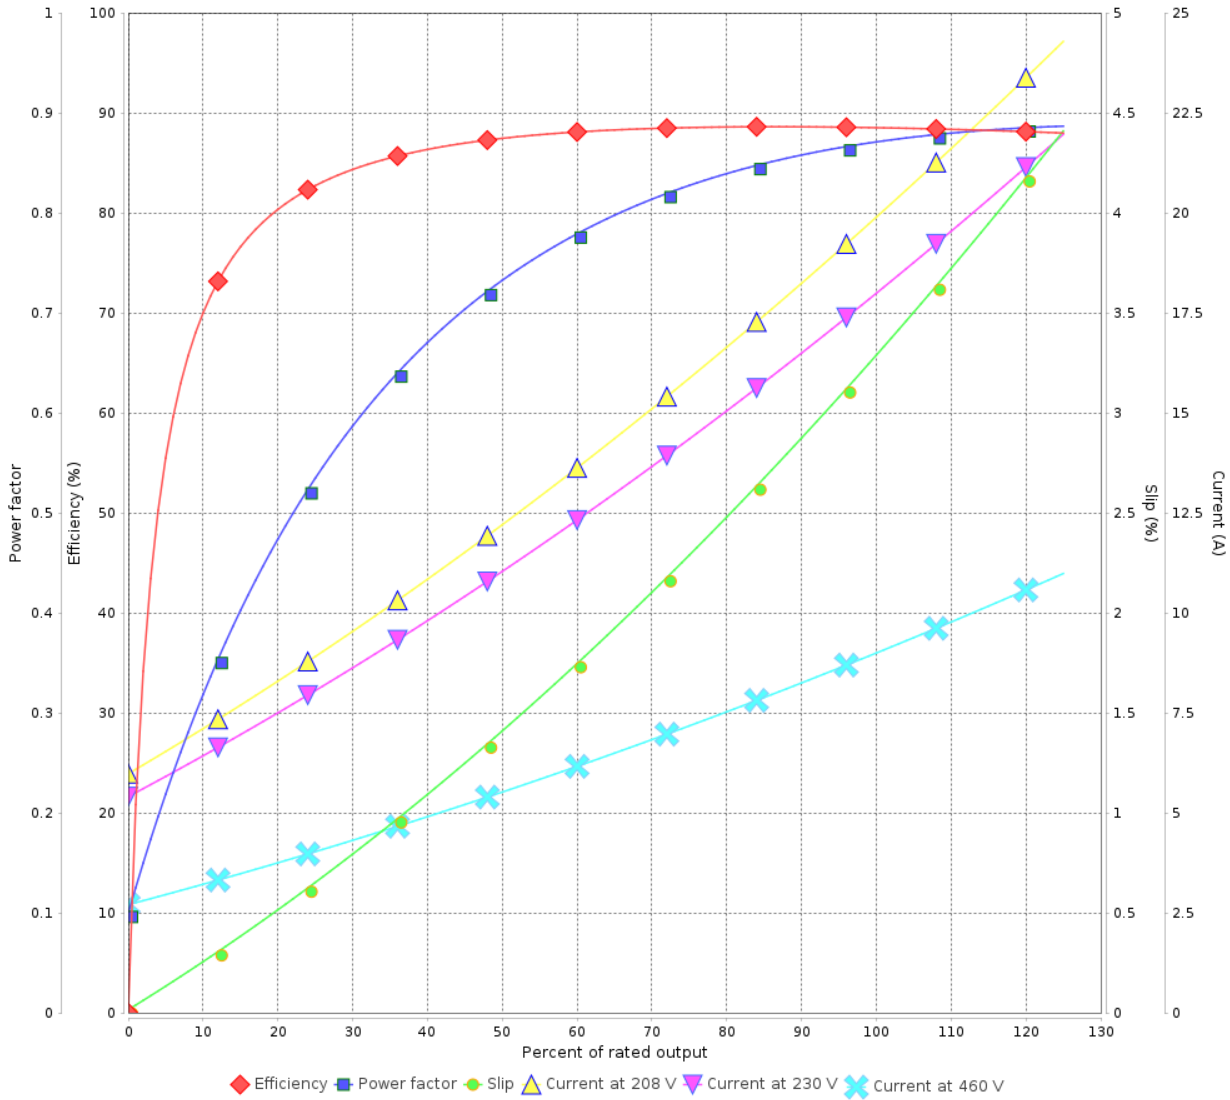

Performance : 230/460 V 60 Hz 2P

Rated current : 17.9/8.97 A
LRC : 7.0
Rated torque : 1.56 kgfm
Locked rotor torque : 210 %
Breakdown torque : 280 %
Rated speed : 3480 rpm

Moment of inertia (J) : 0.0069 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 105 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 8	Revision
Checked by				
Date	13/01/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : Close Coupled Pump NEMA Premium
Efficiency Three-Phase

Product code : 11064347

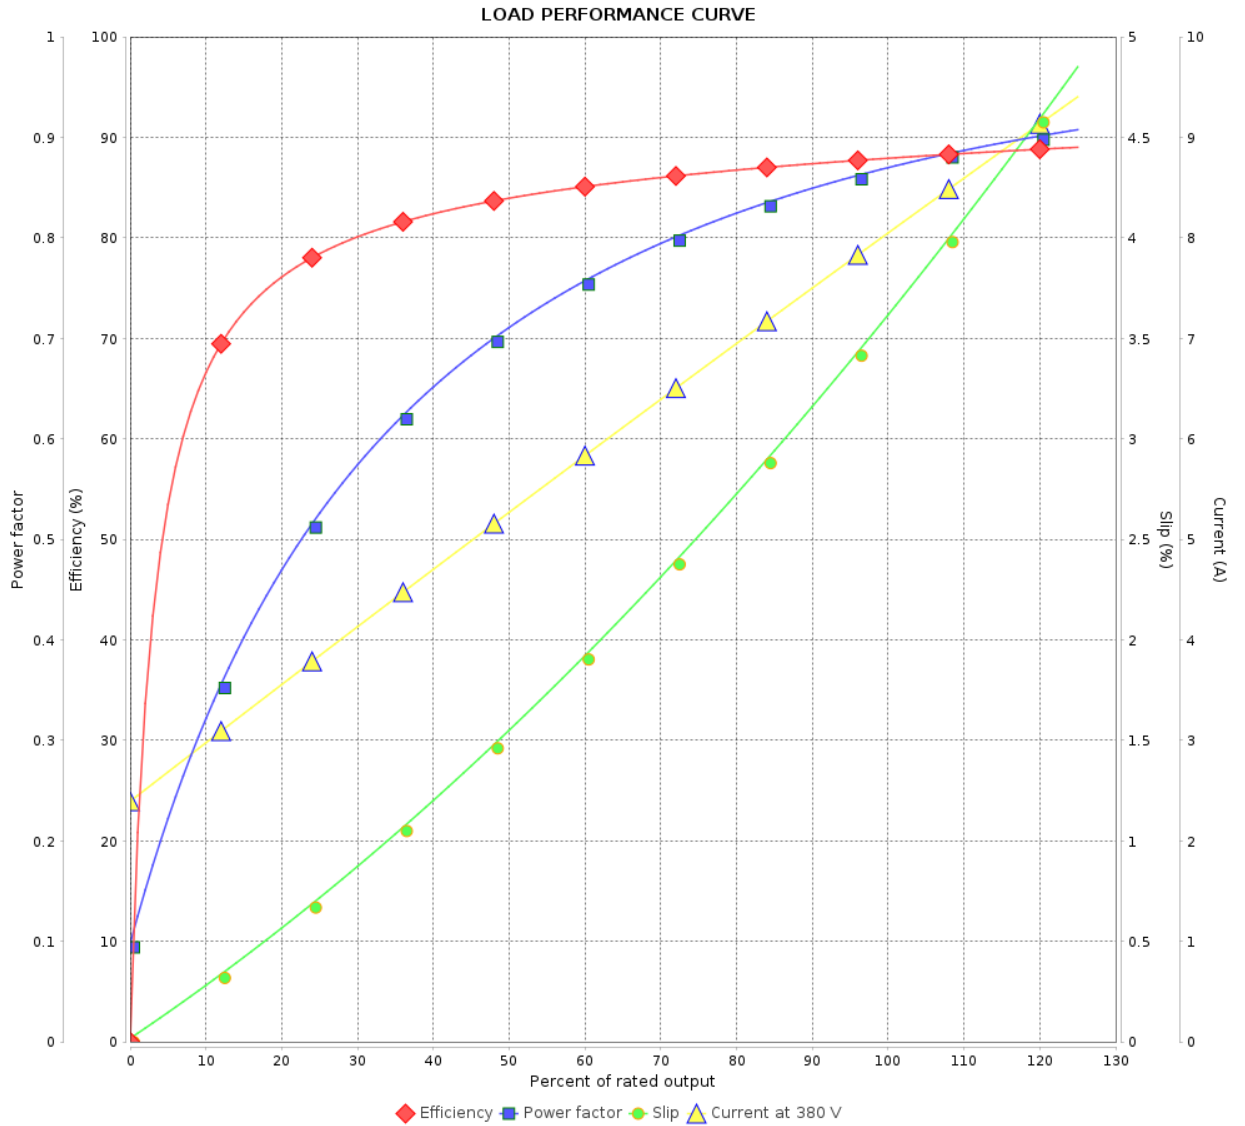

Performance : 380 V 50 Hz 2P IE3

Rated current : 7.93 A
 LRC : 7.1
 Rated torque : 1.38 kgfm
 Locked rotor torque : 210 %
 Breakdown torque : 310 %
 Rated speed : 2890 rpm

Moment of inertia (J) : 0.0069 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 105 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date				
		Page	Revision	
		3 / 8		

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : Close Coupled Pump NEMA Premium
Efficiency Three-Phase

Product code : 11064347

LOAD PERFORMANCE CURVE

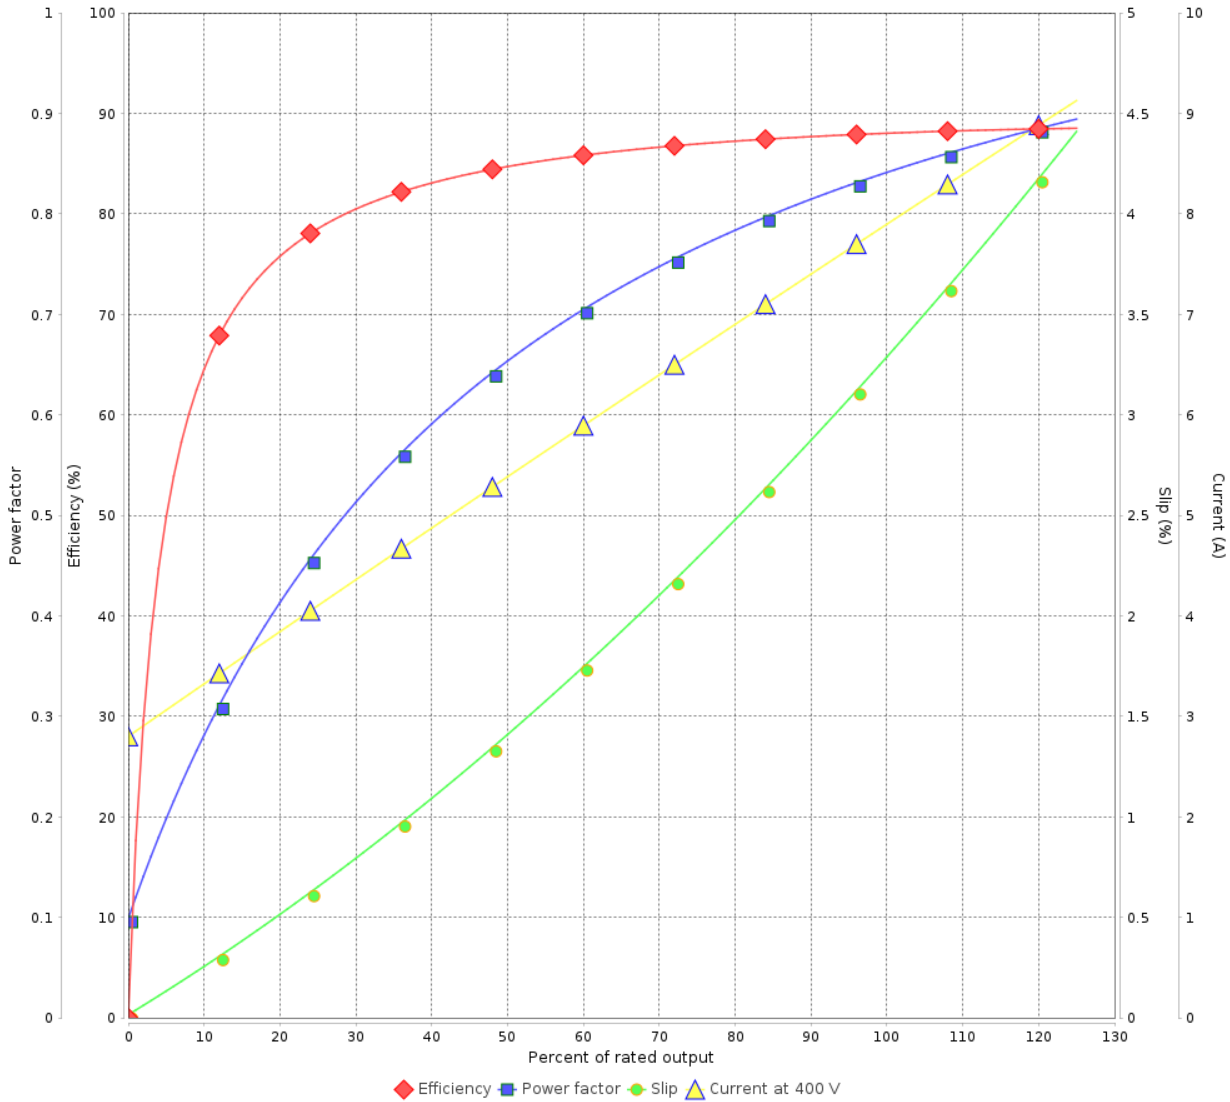

Performance : 400 V 50 Hz 2P IE3

Rated current : 7.80 A
LRC : 7.7
Rated torque : 1.38 kgfm
Locked rotor torque : 250 %
Breakdown torque : 330 %
Rated speed : 2900 rpm

Moment of inertia (J) : 0.0069 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 105 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : Close Coupled Pump NEMA Premium
Efficiency Three-Phase

Product code : 11064347

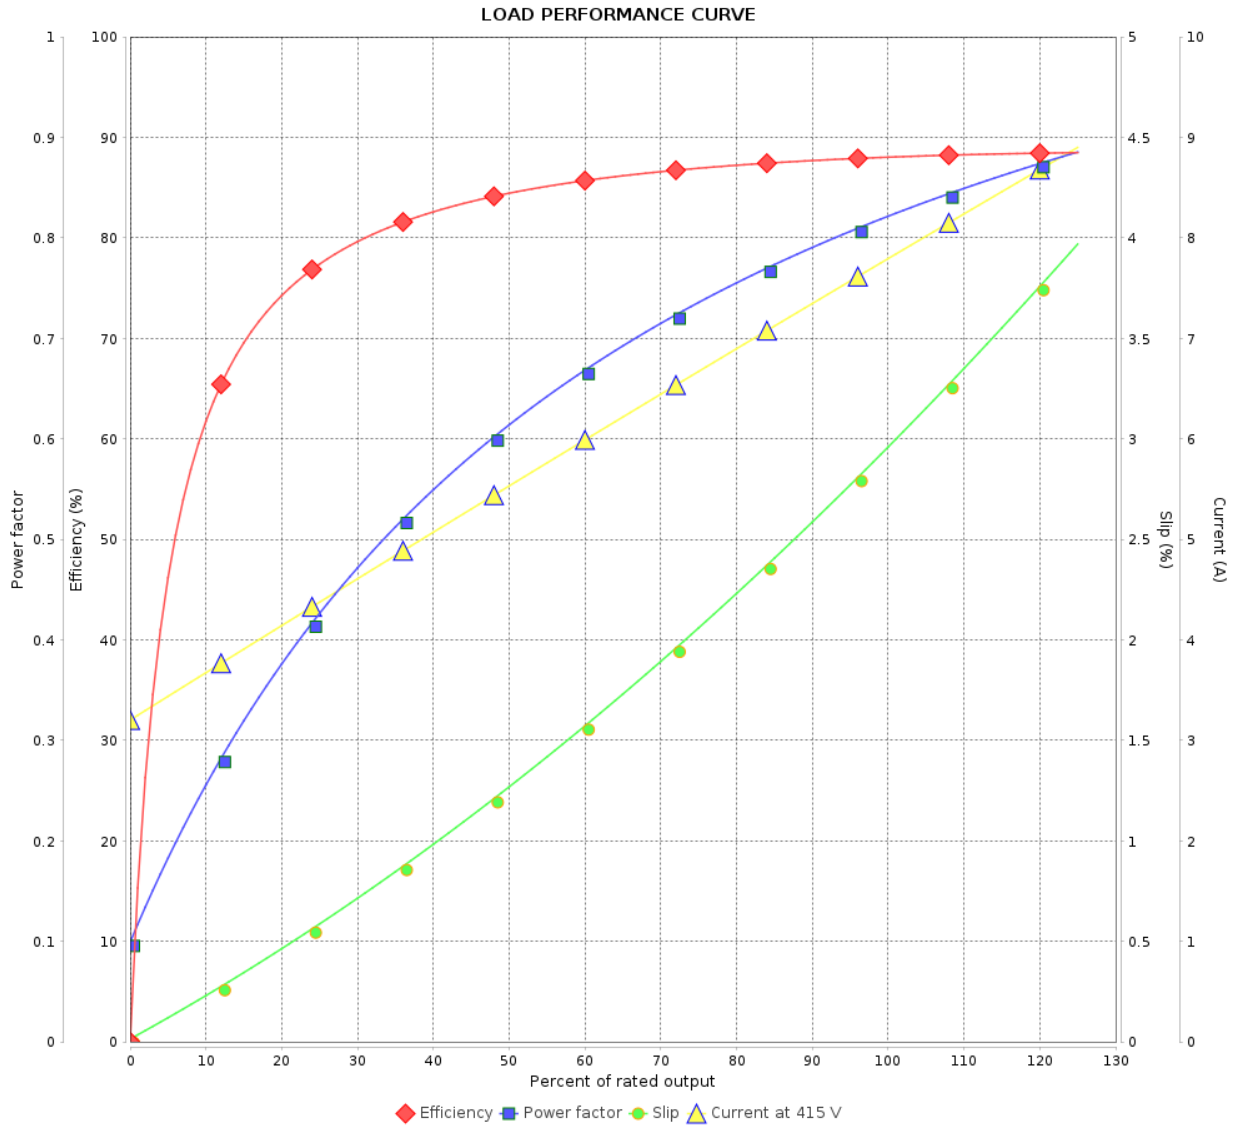

Performance : 415 V 50 Hz 2P IE3

Rated current : 7.70 A
LRC : 8.5
Rated torque : 1.37 kgfm
Locked rotor torque : 260 %
Breakdown torque : 360 %
Rated speed : 2910 rpm

Moment of inertia (J) : 0.0069 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 105 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : Close Coupled Pump NEMA Premium
Efficiency Three-Phase

Product code : 11064347

LOAD PERFORMANCE CURVE

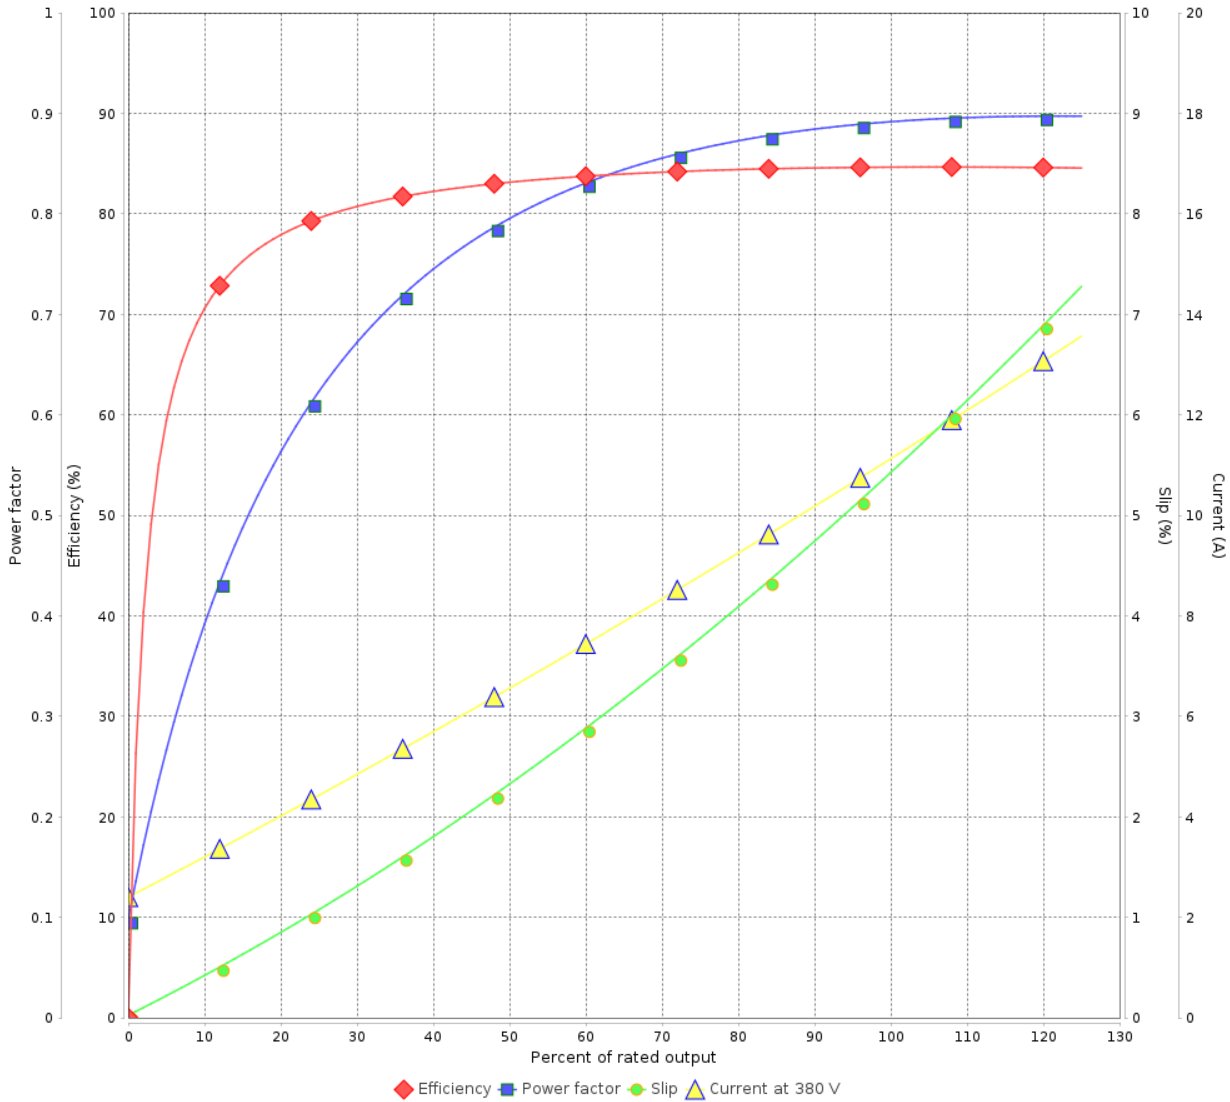

Performance : 380 V 50 Hz 2P IE1

Rated current : 11.1 A
LRC : 5.2
Rated torque : 1.92 kgfm
Locked rotor torque : 150 %
Breakdown torque : 220 %
Rated speed : 2835 rpm

Moment of inertia (J) : 0.0069 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.00
Temperature rise : 105 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : Close Coupled Pump NEMA Premium
Efficiency Three-Phase

Product code : 11064347

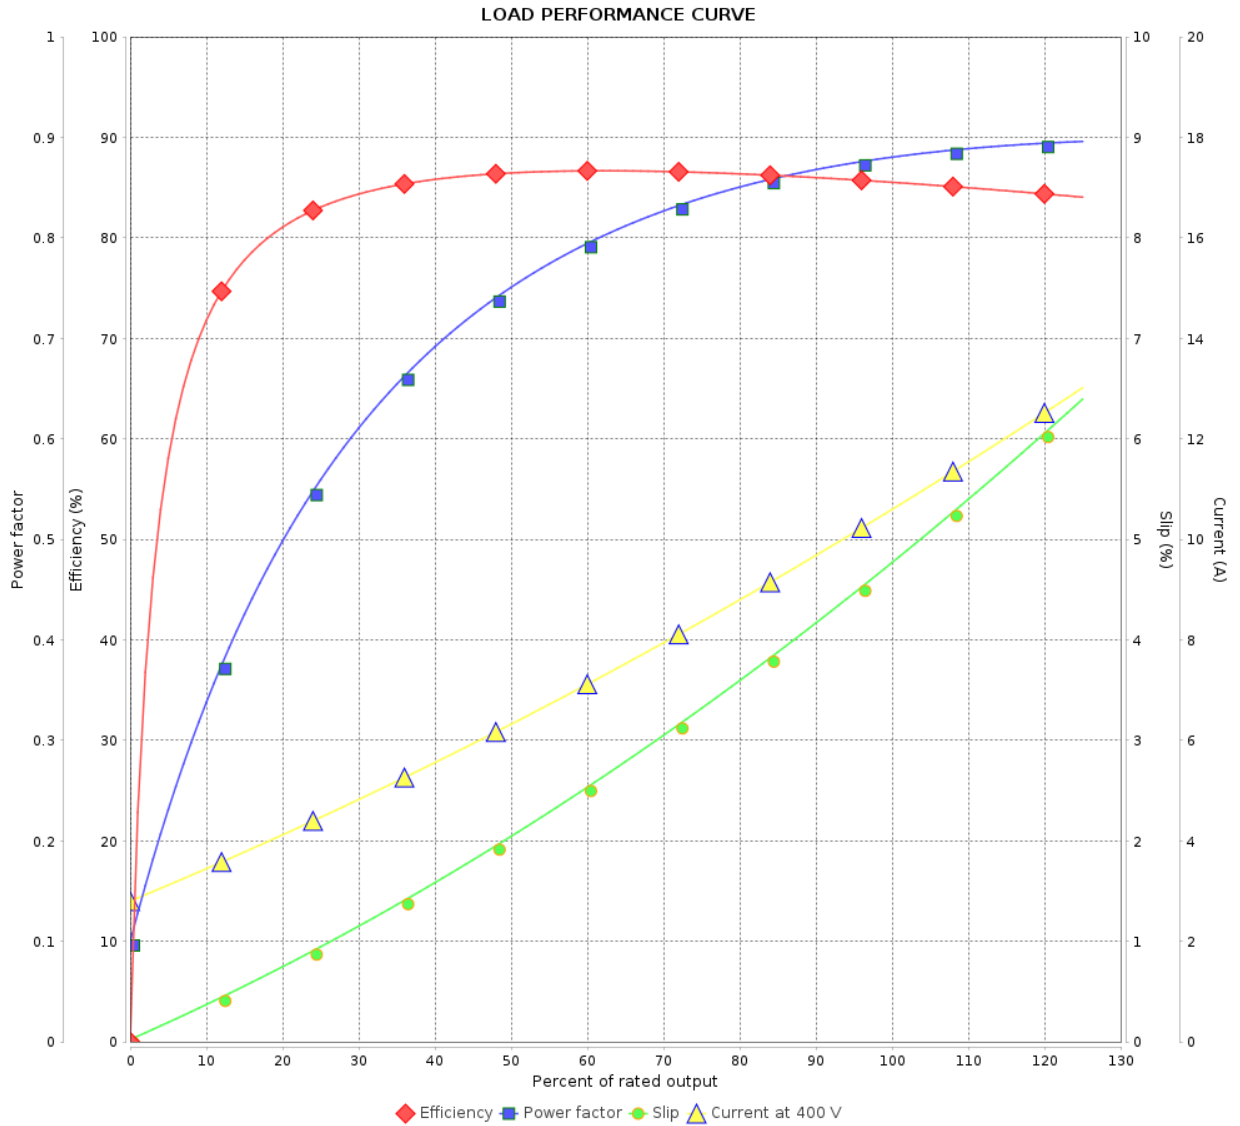

Performance : 400 V 50 Hz 2P IE1

Rated current : 10.6 A
LRC : 5.8
Rated torque : 1.91 kgfm
Locked rotor torque : 180 %
Breakdown torque : 240 %
Rated speed : 2855 rpm

Moment of inertia (J) : 0.0069 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.00
Temperature rise : 105 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Close Coupled Pump NEMA Premium
Efficiency Three-Phase

Product code : 11064347

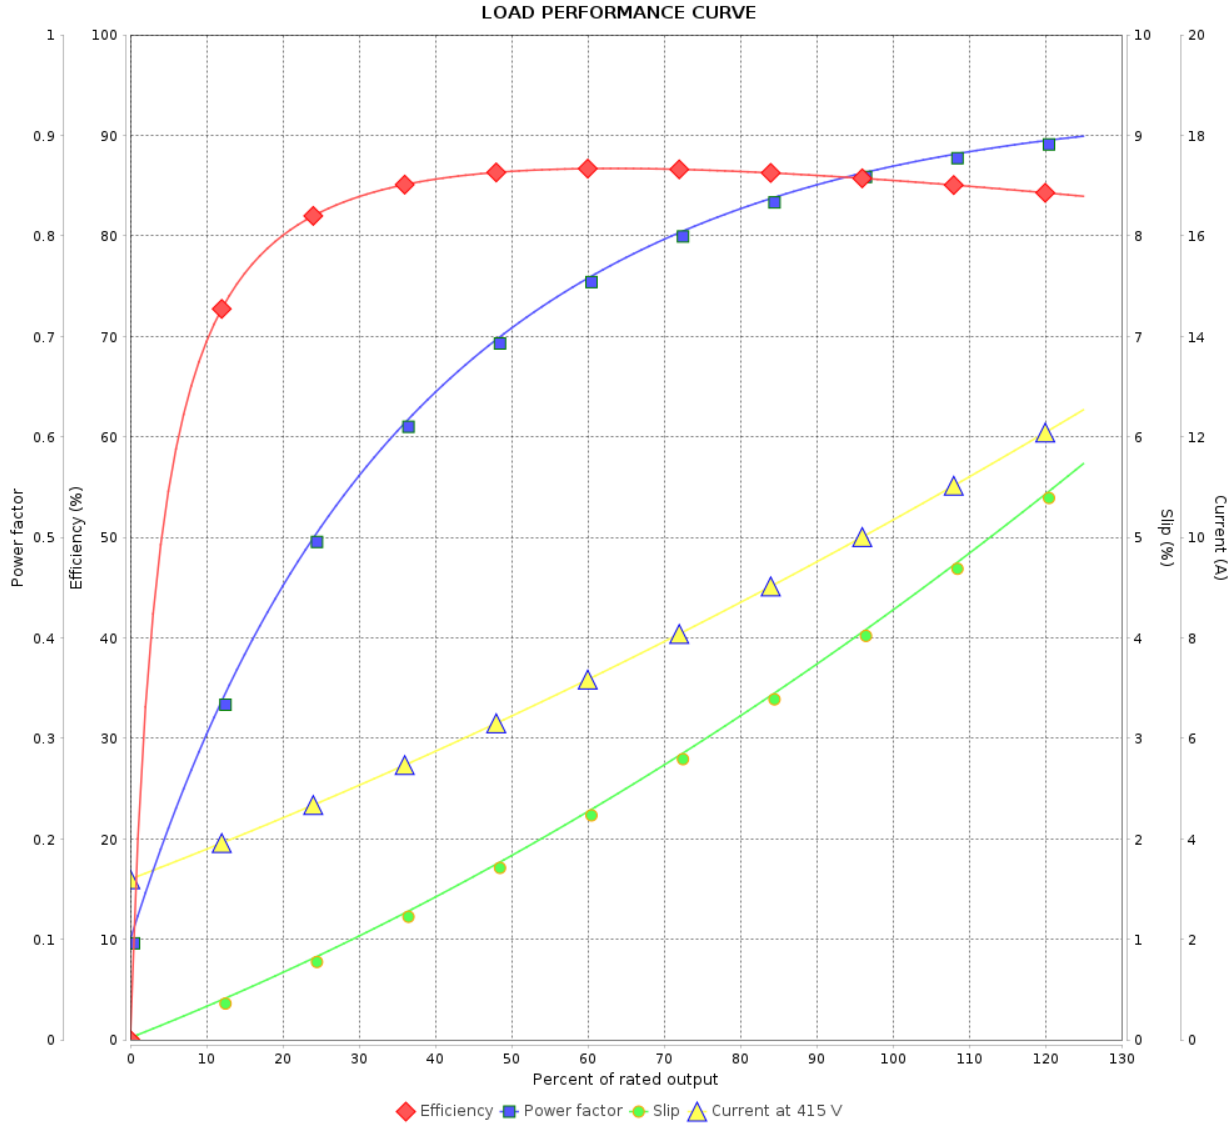

Performance : 415 V 50 Hz 2P IE1

Rated current : 10.3 A
LRC : 6.2
Rated torque : 1.90 kgfm
Locked rotor torque : 190 %
Breakdown torque : 260 %
Rated speed : 2870 rpm

Moment of inertia (J) : 0.0069 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.00
Temperature rise : 105 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		8 / 8		
Date		13/01/2024		