

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :						
Product line : ODP NEMA Premium Efficiency Three-Phase		Product code : 11080792				
Frame : 364/5TC Output : 60 HP (45 kW) Poles : 4 Frequency : 60 Hz Rated voltage : 575 V Rated current : 55.9 A L. R. Amperes : 375 A LRC : 6.7x(Code G) No load current : 17.6 A Rated speed : 1780 rpm Slip : 1.11 % Rated torque : 24.5 kgfm Locked rotor torque : 220 % Breakdown torque : 250 % Insulation class : F Service factor : 1.15 Moment of inertia (J) : 0.6555 kgm ² Design : B	Locked rotor time : 27s (cold) 15s (hot) Temperature rise : 80 K Duty cycle : Cont.(S1) Ambient temperature : -20°C to +40°C Altitude : 1000 m.a.s.l. Protection degree : IP23 Cooling method : IC01 - ODP Mounting : F-1 Rotation ¹ : Both (CW and CCW) Noise level ² : 68.0 dB(A) Starting method : Direct On Line Approx. weight ³ : 371 kg					
Output	50%	75%	100%	Foundation loads		
Efficiency (%)	94.5	94.5	95.0	Max. traction : 502 kgf		
Power Factor	0.74	0.83	0.85	Max. compression : 873 kgf		
		<u>Drive end</u>		<u>Non drive end</u>		
Bearing type	:	6314 C3		6314 C3		
Sealing	:	Without Bearing Seal		Without Bearing Seal		
Lubrication interval	:	20000 h		20000 h		
Lubricant amount	:	27 g		27 g		
Lubricant type	:	Mobil Polyrex EM				
Notes:						
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.			
Rev.	Changes Summary			Performed	Checked	Date
Performed by						
Checked by					Page	Revision
Date	04/05/2024				1 / 2	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : ODP NEMA Premium Efficiency Three-Phase

Product code : 11080792

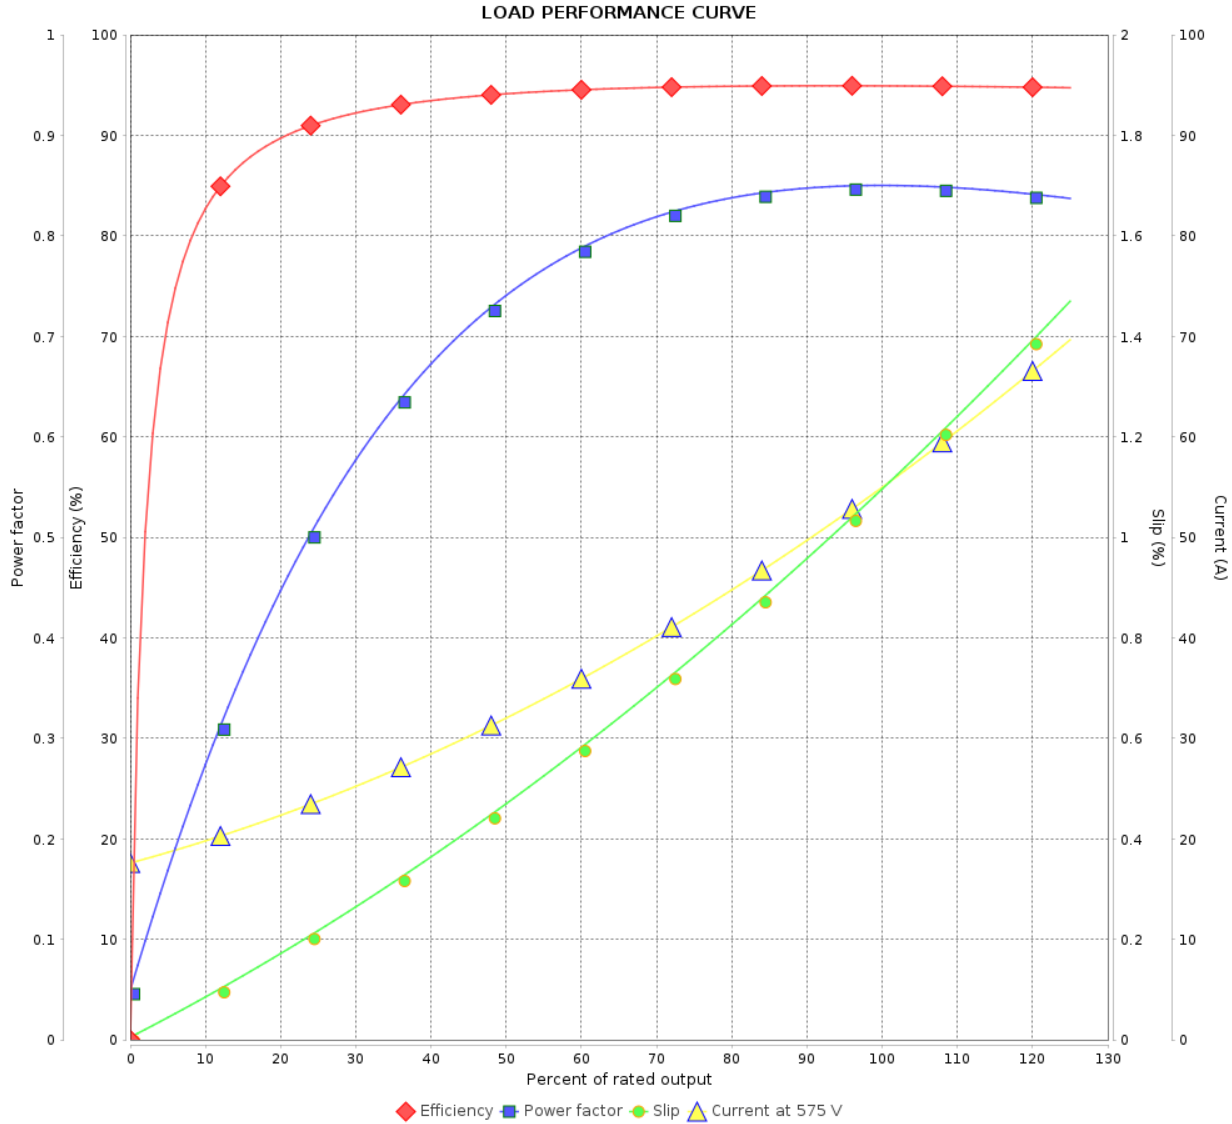

Performance : 575 V 60 Hz 4P

Rated current : 55.9 A
 LRC : 6.7
 Rated torque : 24.5 kgfm
 Locked rotor torque : 220 %
 Breakdown torque : 250 %
 Rated speed : 1780 rpm

Moment of inertia (J) : 0.6555 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				