

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 11165651

Frame : 444/5T	Cooling method : IC411 - TEFC
Insulation class : F	Mounting : F-1
Duty cycle : Cont.(S1)	Rotation ¹ : Both (CW and CCW)
Ambient temperature : -20°C to +40°C	Starting method : Direct On Line
Altitude : 1000 m.a.s.l.	Approx. weight ² : 771 kg
Protection degree : IP55	Moment of inertia (J) : 4.37 kgm ²
Design : B	

Output [HP]	125	100	100	100	125	125	125	
Poles	6	6	6	6	6	6	6	
Frequency [Hz]	60	50	50	50	50	50	50	
Rated voltage [V]	230/460	380	400	415	380	400	415	
Rated current [A]	290/145	147	141	138	174	169	162	
L. R. Amperes [A]	1856/928	940	1003	1004	887	965	1006	
LRC [A]	6.4x(Code G)	6.4x(Code G)	7.1x(Code H)	7.3x(Code J)	5.1x(Code E)	5.7x(Code F)	6.2x(Code G)	
No load current [A]	116/58.0	57.0	62.0	65.0	58.0	62.0	65.0	
Rated speed [RPM]	1188	988	990	990	984	986	987	
Slip [%]	1.00	1.20	1.00	1.00	1.60	1.40	1.30	
Rated torque [kgfm]	76.4	73.5	73.3	73.3	92.2	92.0	91.9	
Locked rotor torque [%]	210	200	229	250	160	180	200	
Breakdown torque [%]	240	240	260	290	190	210	229	
Service factor	1.15	1.00	1.00	1.00	1.00	1.00	1.00	
Temperature rise	80 K	80 K	80 K	80 K	105 K	105 K	105 K	
Locked rotor time	34s (cold) 19s (hot)	27s (cold) 15s (hot)	27s (cold) 15s (hot)	27s (cold) 15s (hot)	27s (cold) 15s (hot)	27s (cold) 15s (hot)	27s (cold) 15s (hot)	
Noise level ²	69.0 dB(A)	65.0 dB(A)	65.0 dB(A)	65.0 dB(A)	65.0 dB(A)	65.0 dB(A)	65.0 dB(A)	
Efficiency (%)	25%	95.2	95.0	94.9	94.9	95.7	95.8	95.7
	50%	95.0	94.8	94.7	94.7	95.0	95.0	95.0
	75%	95.4	94.9	94.9	95.1	94.5	94.5	95.0
	100%	95.0	94.6	94.6	94.8	93.6	93.6	94.1
Power Factor	25%	0.44	0.43	0.40	0.37	0.48	0.46	0.43
	50%	0.70	0.68	0.65	0.62	0.73	0.71	0.69
	75%	0.79	0.78	0.76	0.74	0.81	0.79	0.78
	100%	0.82	0.82	0.81	0.80	0.84	0.82	0.82

Losses at normative operating points (speed;torque), in percentage of rated output power

Losses (%)	P1 (0,9;1,0)	5.2	5.6	5.6	5.4	6.7	6.7	6.1
	P2 (0,5;1,0)	4.1	4.5	4.5	4.3	5.4	5.4	4.9
	P3 (0,25;1,0)	3.8	4.1	4.1	4.0	5.0	5.0	4.5
	P4 (0,9;0,5)	2.7	2.9	2.9	2.8	3.4	3.4	3.2
	P5 (0,5;0,5)	1.8	1.9	1.9	1.8	2.3	2.3	2.1
	P6 (0,5;0,25)	1.2	1.3	1.3	1.3	1.6	1.6	1.5
	P7 (0,25;0,25)	0.8	0.9	0.9	0.9	1.1	1.1	1.0

Bearing type : Sealing : Lubrication interval : Lubricant amount : Lubricant type :	Drive end	NU-319 C3	Non drive end	6316 C3	Foundation loads Max. traction : 1463 kgf Max. compression : 2234 kgf
		WSeal		WSeal	
		9000 h		16000 h	
		45 g		34 g	
		Mobil Polyrex EM			

This revision replaces and cancel the previous one, which must be eliminated.

(1) Looking the motor from the shaft end.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	13/01/2024		1 / 9	

DATA SHEET

Three Phase Induction Motor - Squirrel Cage




Customer : _____

Notes
USABLE @208V 316A SF 1.00 SFA 316A

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	13/01/2024		2 / 9	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11165651

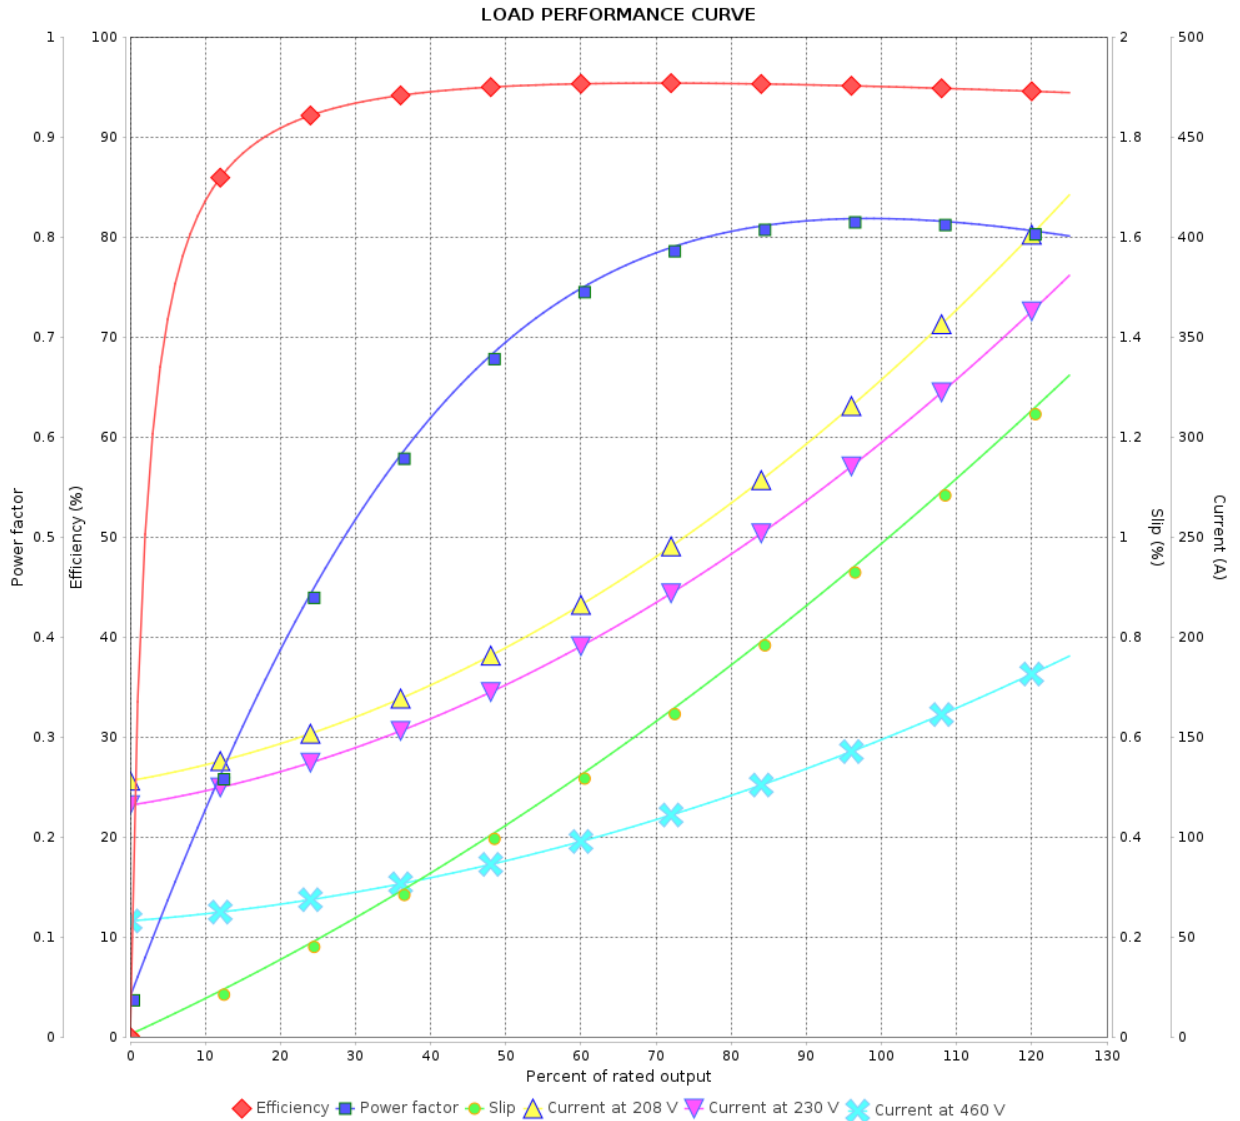

Performance : 230/460 V 60 Hz 6P

Rated current : 290/145 A
 LRC : 6.4
 Rated torque : 76.4 kgfm
 Locked rotor torque : 210 %
 Breakdown torque : 240 %
 Rated speed : 1188 rpm

Moment of inertia (J) : 4.37 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11165651

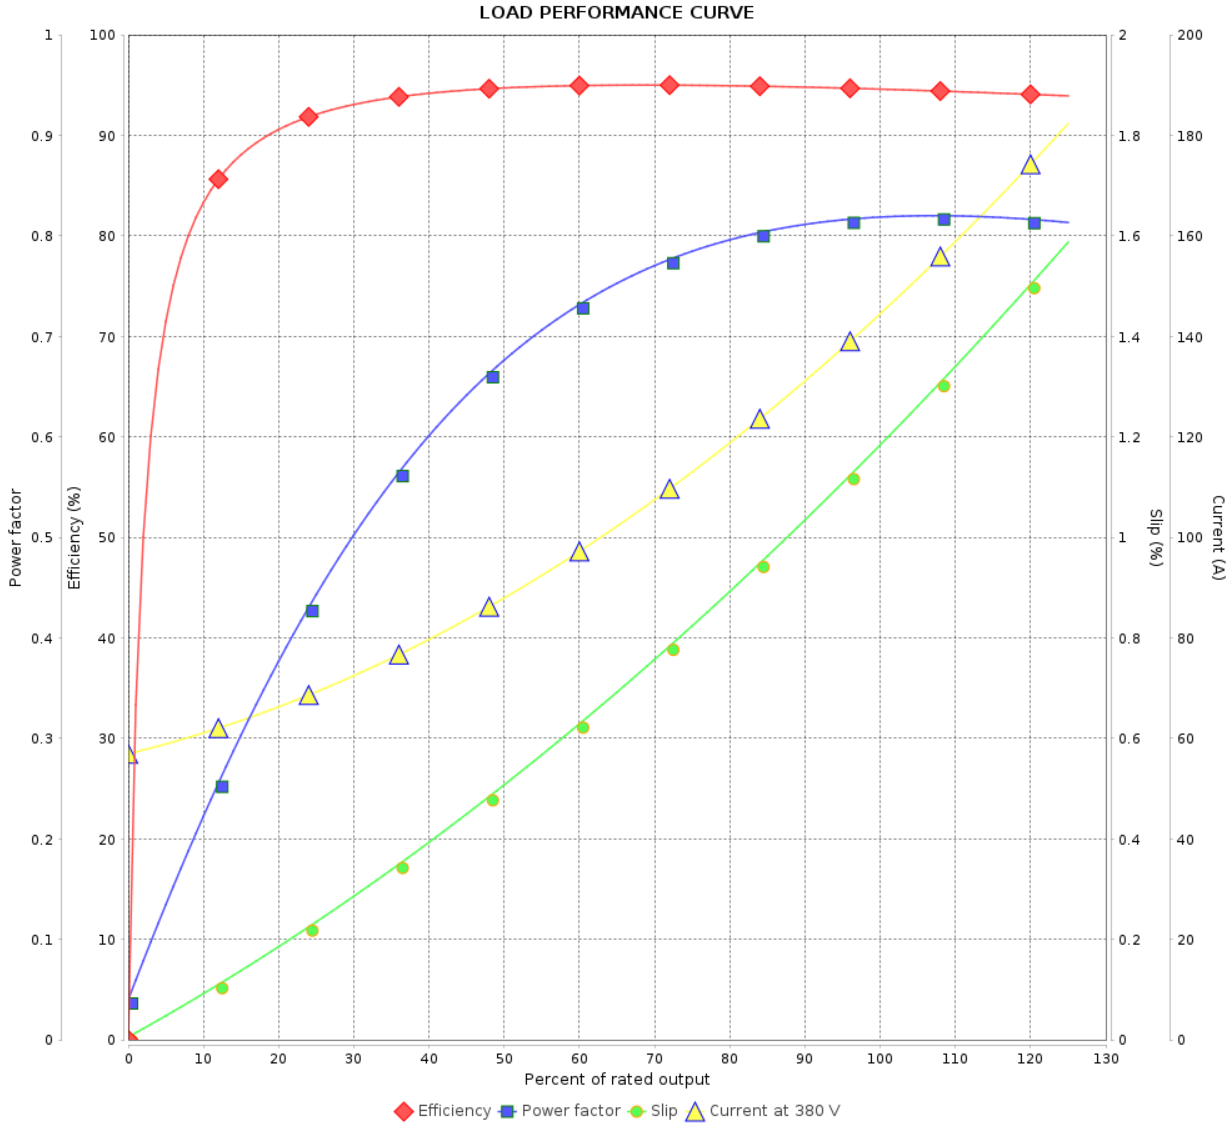

Performance : 380 V 50 Hz 6P IE3

Rated current	: 147 A	Moment of inertia (J)	: 4.37 kgm ²
LRC	: 6.4	Duty cycle	: Cont.(S1)
Rated torque	: 73.5 kgfm	Insulation class	: F
Locked rotor torque	: 200 %	Service factor	: 1.00
Breakdown torque	: 240 %	Temperature rise	: 80 K
Rated speed	: 988 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 4 / 9	Revision
Checked by				
Date	13/01/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11165651

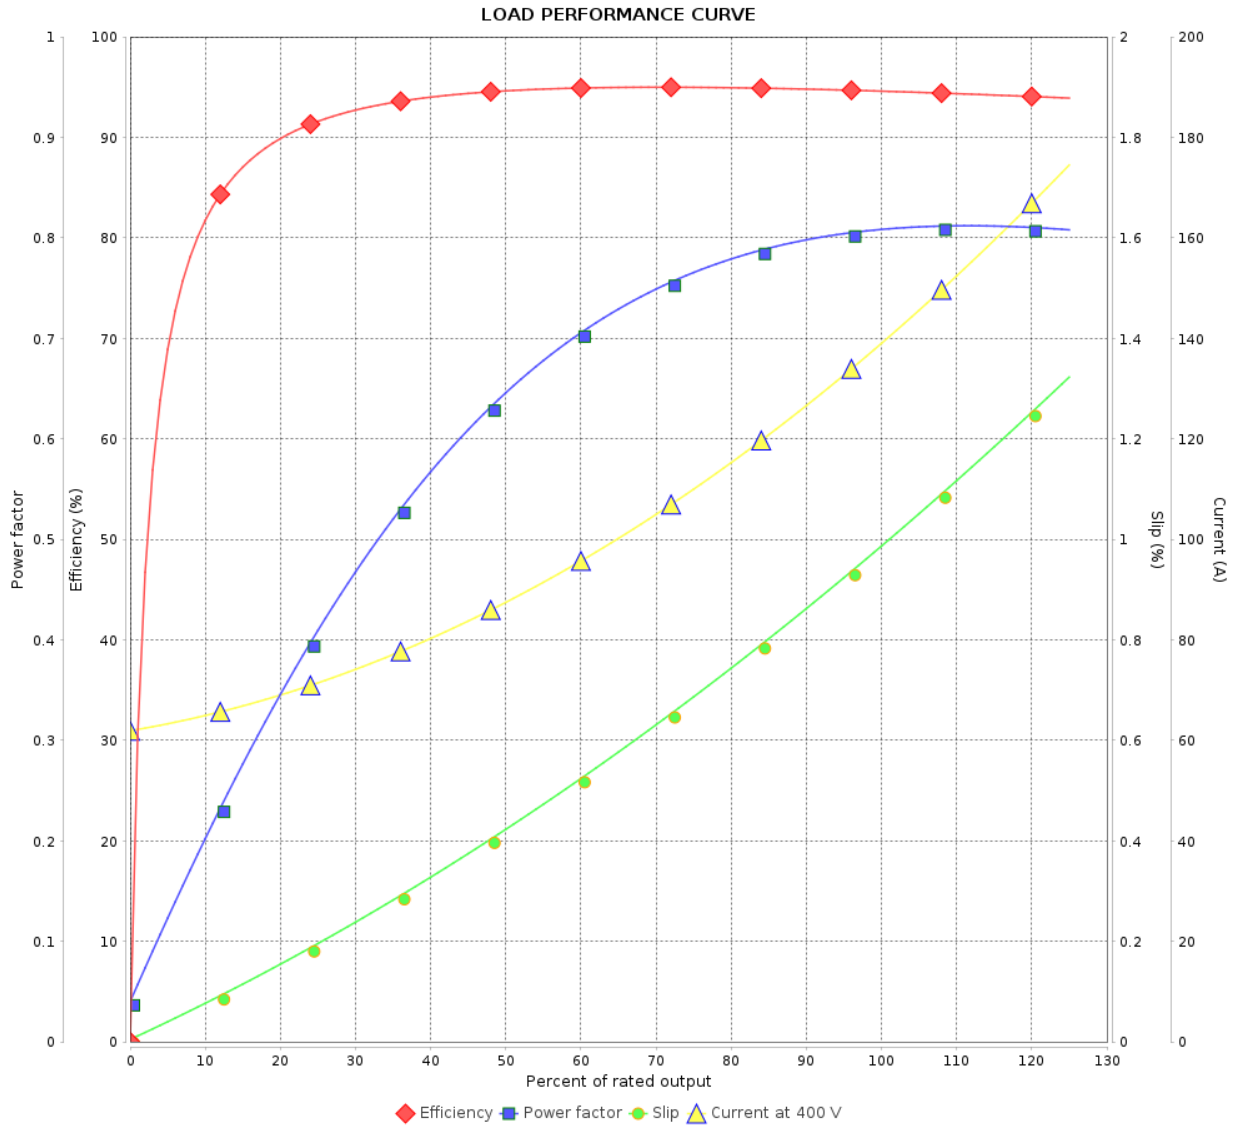

Performance : 400 V 50 Hz 6P IE3

Rated current : 141 A
 LRC : 7.1
 Rated torque : 73.3 kgfm
 Locked rotor torque : 229 %
 Breakdown torque : 260 %
 Rated speed : 990 rpm

Moment of inertia (J) : 4.37 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		5 / 9		
Date		13/01/2024		

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11165651

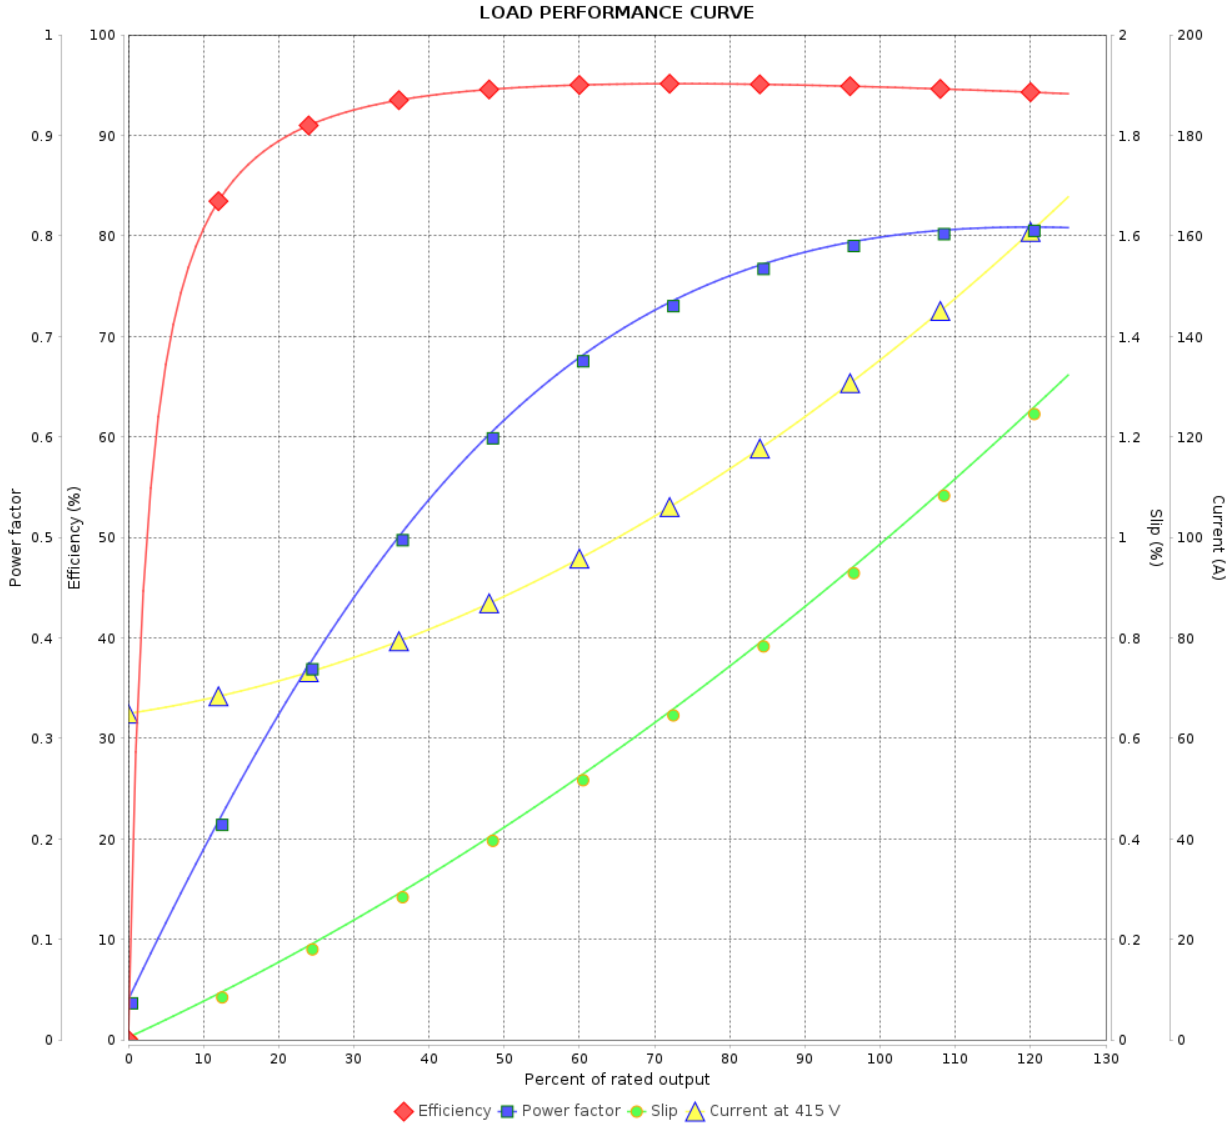

Performance : 415 V 50 Hz 6P IE3

Rated current : 138 A
 LRC : 7.3
 Rated torque : 73.3 kgfm
 Locked rotor torque : 250 %
 Breakdown torque : 290 %
 Rated speed : 990 rpm

Moment of inertia (J) : 4.37 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 6 / 9	Revision
Checked by				
Date	13/01/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11165651

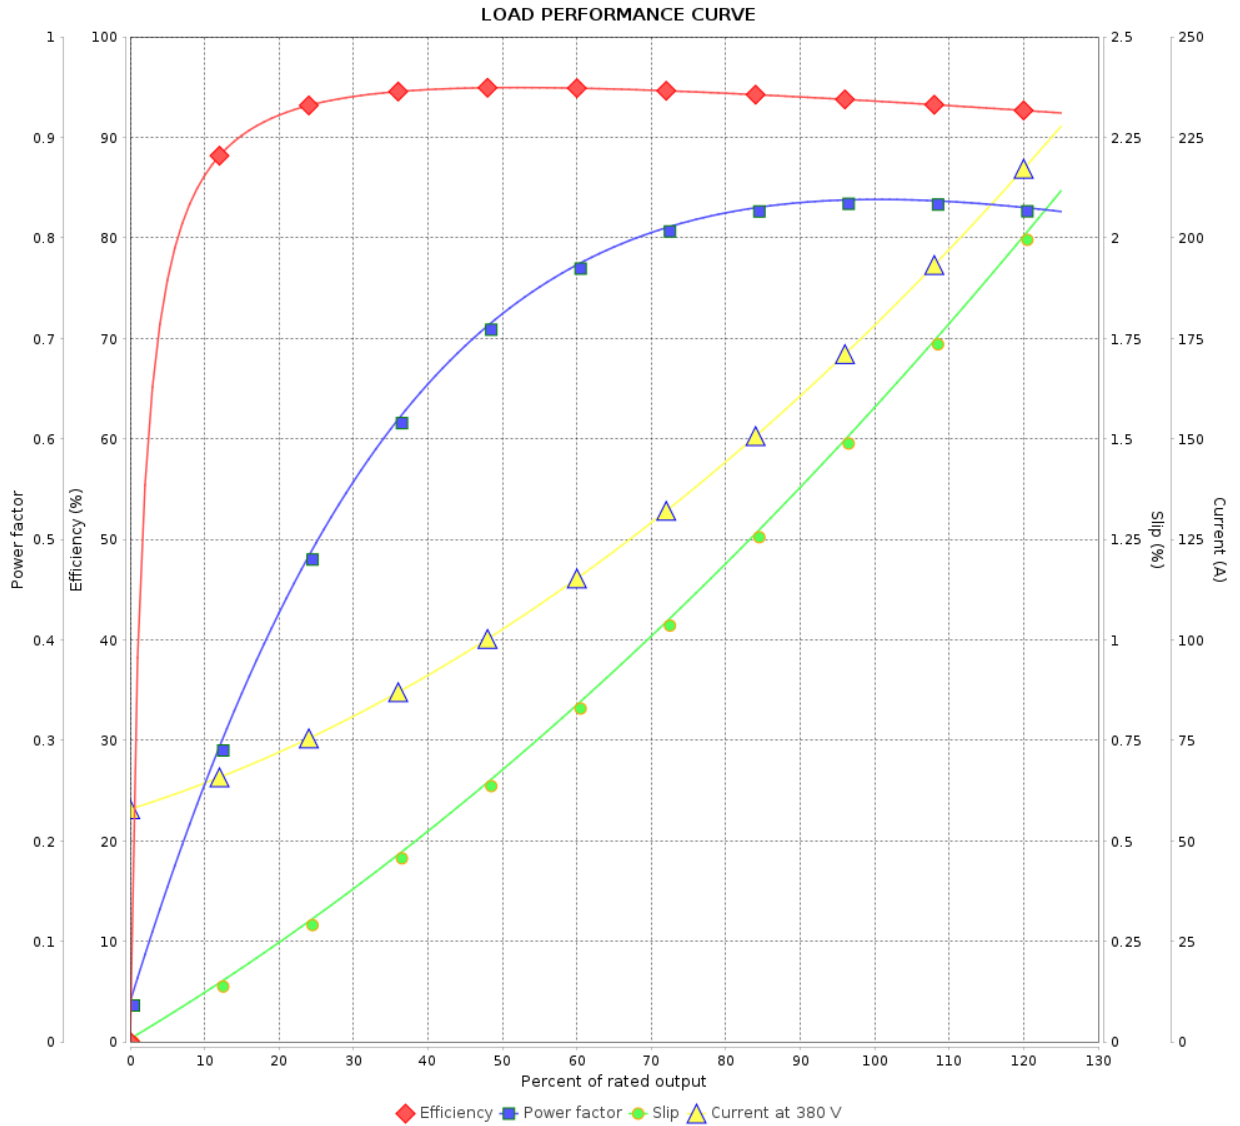

Performance : 380 V 50 Hz 6P IE1

Rated current : 174 A
 LRC : 5.1
 Rated torque : 92.2 kgfm
 Locked rotor torque : 160 %
 Breakdown torque : 190 %
 Rated speed : 984 rpm

Moment of inertia (J) : 4.37 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 105 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11165651

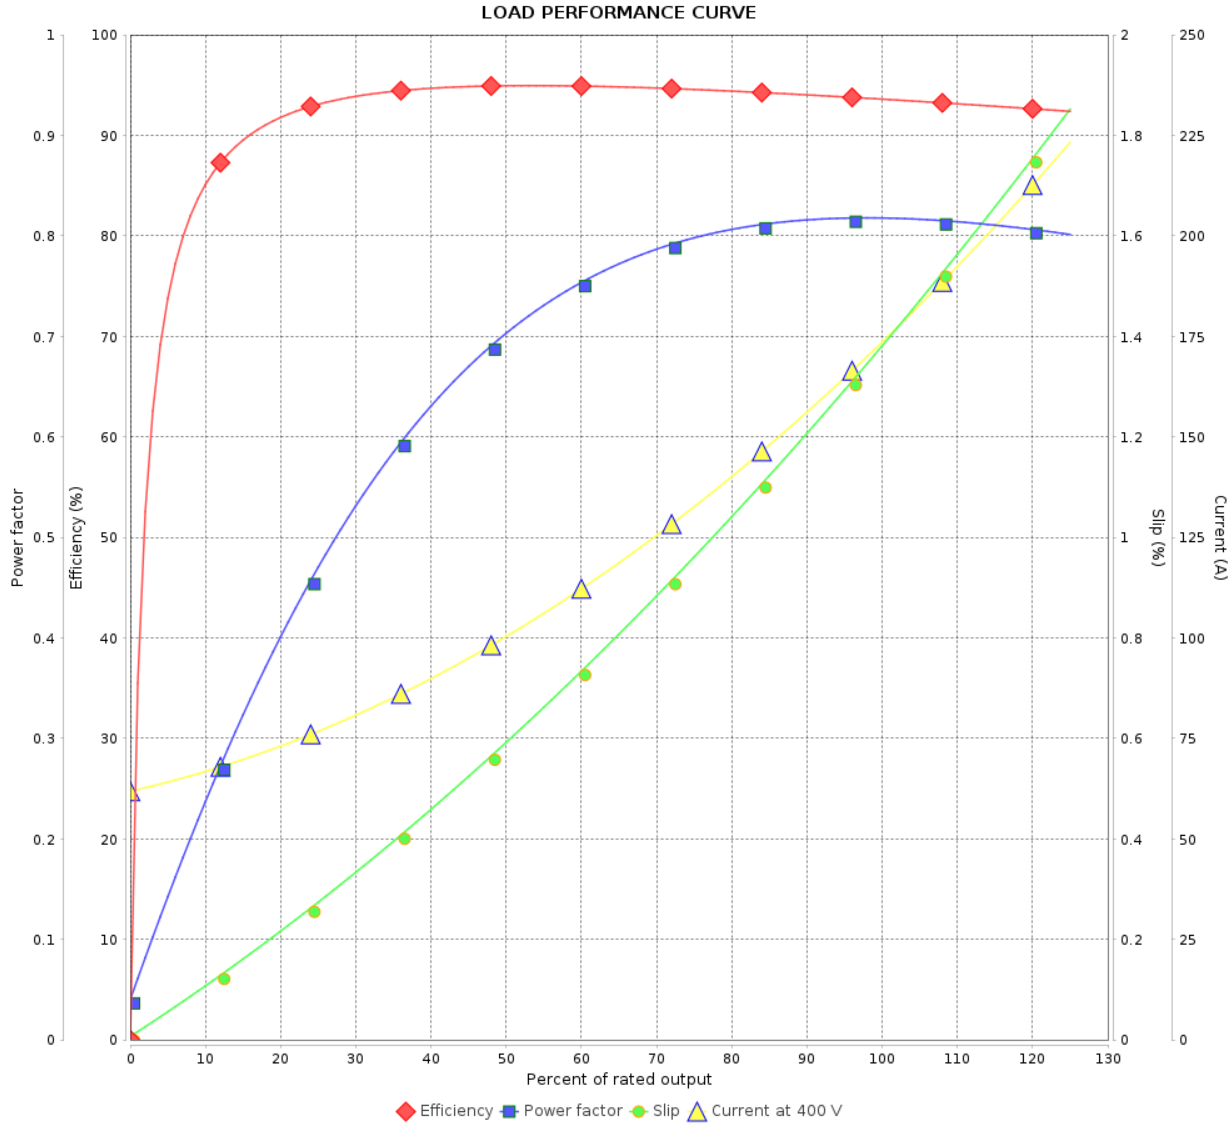

Performance : 400 V 50 Hz 6P IE1

Rated current	: 169 A	Moment of inertia (J)	: 4.37 kgm ²
LRC	: 5.7	Duty cycle	: Cont.(S1)
Rated torque	: 92.0 kgfm	Insulation class	: F
Locked rotor torque	: 180 %	Service factor	: 1.00
Breakdown torque	: 210 %	Temperature rise	: 105 K
Rated speed	: 986 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		8 / 9		
Date	13/01/2024			

