

# DATA SHEET



## Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : Close Coupled Pump NEMA Premium Efficiency Three-Phase      Product code : 11168259

Frame	: E143/5JM	Locked rotor time	: 27s (cold) 15s (hot)
Output	: 2 HP (1.5 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 230/460 V	Altitude	: 1000 m.a.s.l.
Rated current	: 5.80/2.90 A	Protection degree	: IP21
L. R. Amperes	: 47.6/23.8 A	Cooling method	: IC01 - ODP
LRC	: 8.2x(Code L)	Mounting	: F-1
No load current	: 3.20/1.60 A	Rotation <sup>1</sup>	: Both (CW and CCW)
Rated speed	: 1730 rpm	Noise level <sup>2</sup>	: 52.0 dB(A)
Slip	: 3.89 %	Starting method	: Direct On Line
Rated torque	: 0.839 kgfm	Approx. weight <sup>3</sup>	: 21.2 kg
Locked rotor torque	: 350 %		
Breakdown torque	: 330 %		
Insulation class	: F		
Service factor	: 1.15		
Moment of inertia (J)	: 0.0067 kgm <sup>2</sup>		
Design	: B		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	82.5	85.5	86.5	Max. traction	: 68 kgf
Power Factor	0.58	0.70	0.78	Max. compression	: 89 kgf

	Drive end	Non drive end
Bearing type	: 6206 ZZ	: 6204 ZZ
Sealing	: Without Bearing Seal	: Without Bearing Seal
Lubrication interval	: -	: -
Lubricant amount	: -	: -
Lubricant type	: Mobil Polyrex EM	

Notes  
USABLE @208V 5.95A SF 1.00 SFA 5.95A

This revision replaces and cancel the previous one, which must be eliminated.  
 (1) Looking the motor from the shaft end.  
 (2) Measured at 1m and with tolerance of +3dB(A).  
 (3) Approximate weight subject to changes after manufacturing process.  
 (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	23/10/2024		1 / 2	

# LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : Close Coupled Pump NEMA  
Premium Efficiency Three-Phase

Product code : 11168259

LOAD PERFORMANCE CURVE

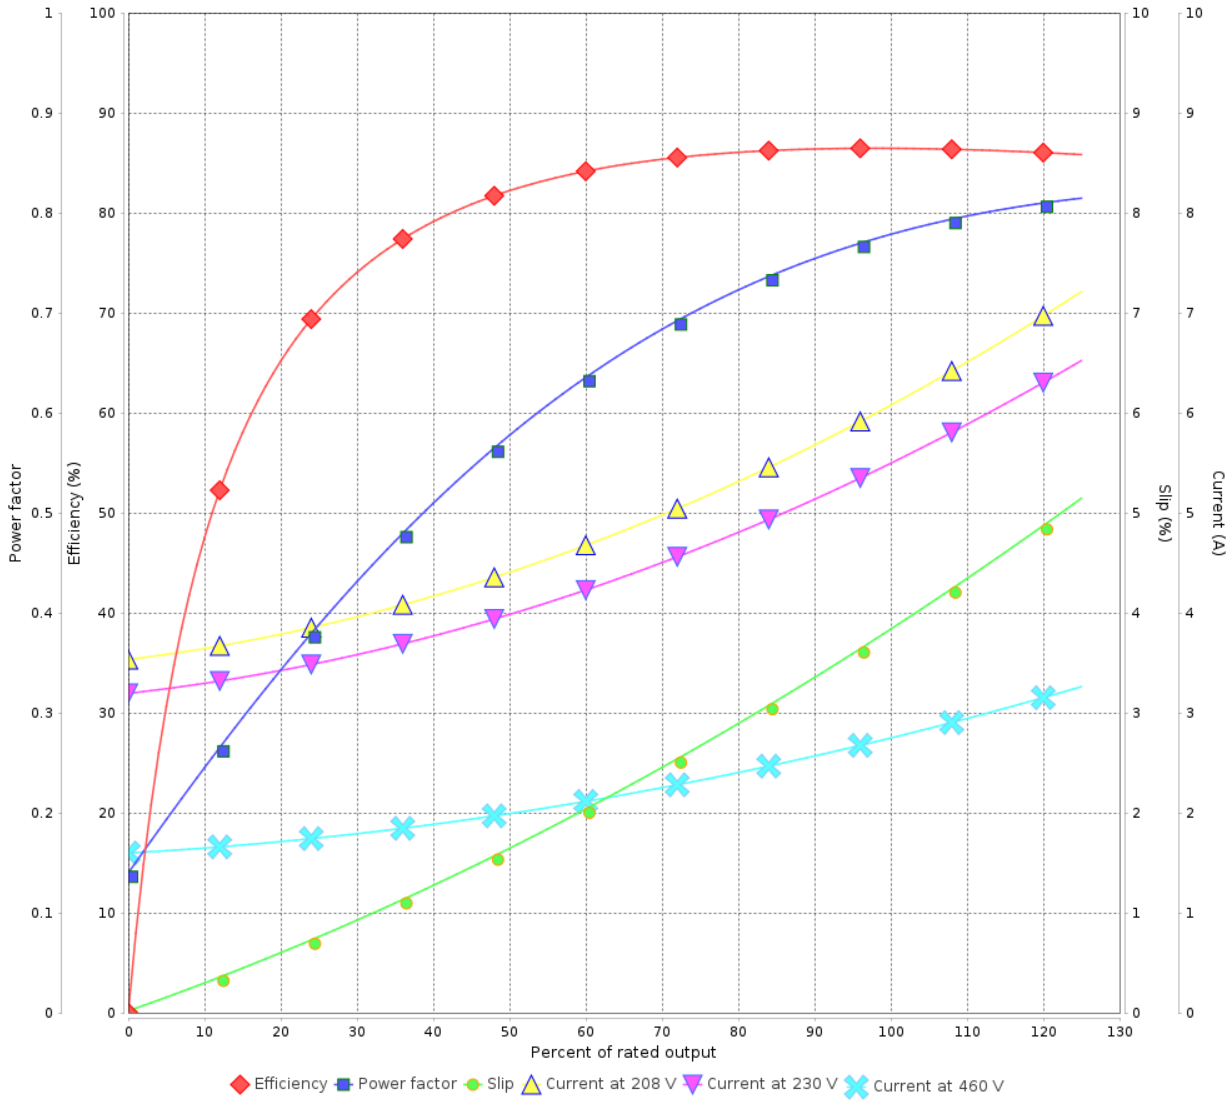

Performance : 230/460 V 60 Hz 4P

Rated current : 5.80/2.90 A  
LRC : 8.2  
Rated torque : 0.839 kgfm  
Locked rotor torque : 350 %  
Breakdown torque : 330 %  
Rated speed : 1730 rpm

Moment of inertia (J) : 0.0067 kgm<sup>2</sup>  
Duty cycle : Cont.(S1)  
Insulation class : F  
Service factor :  
Temperature rise : 80 K  
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				