

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W21 Explosion Proof NEMA Premium Efficiency Three-Phase Product code : 11360897

Frame	: 404/5TS	Locked rotor time	: 37s (cold) 21s (hot)
Output	: 100 HP (75 kW)	Temperature rise	: 80 K
Poles	: 2	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 88.0 A	Protection degree	: IP55
L. R. Amperes	: 572 A	Cooling method	: IC411 - TEFC
LRC	: 6.5x(Code G)	Mounting	: F-1
No load current	: 20.0 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 3550 rpm	Noise level ²	: 85.0 dB(A)
Slip	: 1.39 %	Starting method	: Direct On Line
Rated torque	: 20.4 kgfm	Approx. weight ³	: 544 kg
Locked rotor torque	: 250 %		
Breakdown torque	: 280 %		
Insulation class	: F		
Service factor	: 1.15		
Moment of inertia (J)	: 0.5561 kgm ²		
Design	: B		

Output	25%	50%	75%	100%	Foundation loads	
Efficiency (%)	93.4	93.6	95.0	95.0	Max. traction	: 291 kgf
Power Factor	0.62	0.85	0.89	0.90	Max. compression	: 835 kgf

	Drive end	Non drive end
Bearing type	: 6314 C3	6314 C3
Sealing	: Oil Seal	Lip Seal
Lubrication interval	: 3604 h	3604 h
Lubricant amount	: 27 g	27 g
Lubricant type	: Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	22/10/2023		1 / 3	

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Thermal protection

ID	Application	Type	Quantity	Sensing Temperature
1	Winding	Thermostat - 2 wires	1 x Phase	155 °C

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	22/10/2023		2 / 3	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W21 Explosion Proof NEMA Premium Efficiency Three-Phase

Product code : 11360897

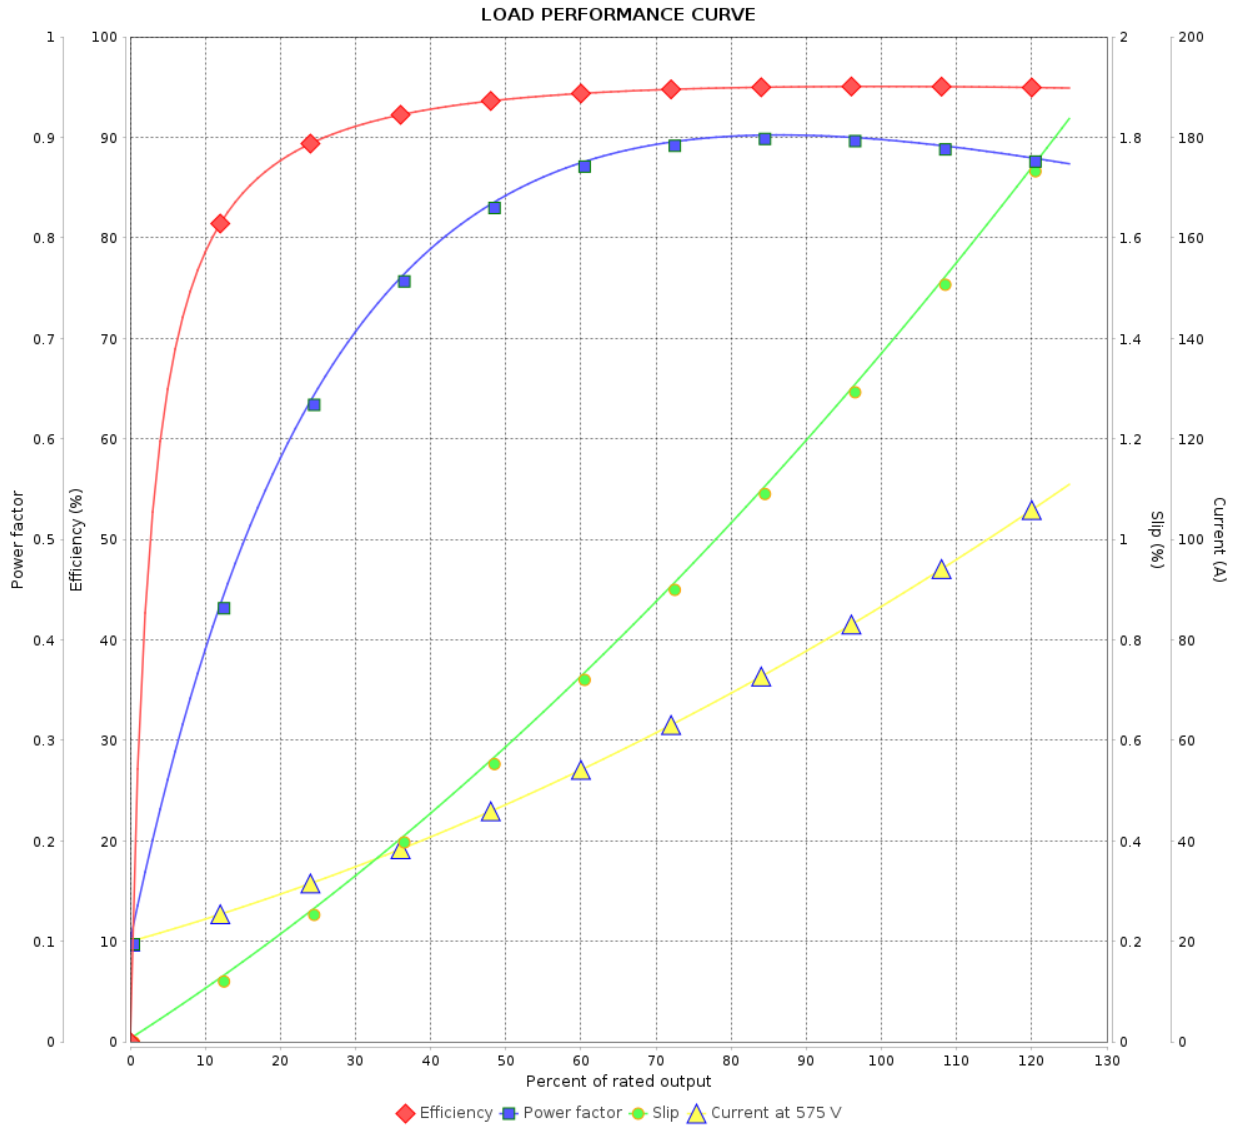

Performance : 575 V 60 Hz 2P

Rated current : 88.0 A
 LRC : 6.5
 Rated torque : 20.4 kgfm
 Locked rotor torque : 250 %
 Breakdown torque : 280 %
 Rated speed : 3550 rpm

Moment of inertia (J) : 0.5561 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				