

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 11413125

Frame	: 404/5T	Cooling method	: IC411 - TEFC
Insulation class	: F	Mounting	: F-1
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 541 kg
Protection degree	: IP55	Moment of inertia (J)	: 1.69 kgm ²
Design	: B		

Output [HP]	75	60	60	60	75	75	75
Poles	6	6	6	6	6	6	6
Frequency [Hz]	60	50	50	50	50	50	50
Rated voltage [V]	230/460	380	400	415	380	400	415
Rated current [A]	170/84.9	85.5	83.2	82.1	104	99.3	95.7
L. R. Amperes [A]	1087/543	547	574	599	541	566	593
LRC [A]	6.4x(Code G)	6.4x(Code G)	6.9x(Code H)	7.3x(Code J)	5.2x(Code E)	5.7x(Code F)	6.2x(Code G)
No load current [A]	60.0/30.0	29.7	31.8	33.5	29.7	31.8	33.5
Rated speed [RPM]	1184	985	985	985	978	981	983
Slip [%]	1.33	1.50	1.50	1.50	2.20	1.90	1.70
Rated torque [kgfm]	46.0	44.2	44.2	44.2	55.7	55.5	55.4
Locked rotor torque [%]	229	200	240	270	170	190	210
Breakdown torque [%]	229	240	270	290	180	200	220
Service factor	1.25	1.00	1.00	1.00	1.00	1.00	1.00
Temperature rise	80 K	80 K	80 K	80 K	105 K	105 K	105 K
Locked rotor time	30s (cold) 17s (hot)	61s (cold) 34s (hot)	57s (cold) 32s (hot)	54s (cold) 30s (hot)	25s (cold) 14s (hot)	25s (cold) 14s (hot)	25s (cold) 14s (hot)
Noise level ²	68.0 dB(A)	64.0 dB(A)	64.0 dB(A)	64.0 dB(A)	64.0 dB(A)	64.0 dB(A)	64.0 dB(A)
Efficiency (%)	25%						
	50%	94.1	93.5	93.5	93.5	91.8	92.4
	75%	94.5	94.0	94.0	94.0	92.2	92.8
	100%	94.5	94.1	94.1	94.1	92.4	93.0
Power Factor	25%						
	50%	0.74	0.66	0.62	0.60	0.79	0.76
	75%	0.83	0.79	0.75	0.74	0.85	0.84
	100%	0.86	0.85	0.83	0.81	0.87	0.86

Losses at normative operating points (speed;torque), in percentage of rated output power

Losses (%)	P1 (0,9;1,0)	6.3	6.8	6.8	6.8	9.0	8.2	8.2
	P2 (0,5;1,0)	5.0	5.5	5.5	5.5	7.6	6.8	6.8
	P3 (0,25;1,0)	4.5	4.9	4.9	4.9	7.0	6.3	6.3
	P4 (0,9;0,5)	3.5	3.7	3.7	3.7	4.7	4.4	4.4
	P5 (0,5;0,5)	2.3	2.5	2.5	2.5	3.3	3.0	3.0
	P6 (0,5;0,25)	1.7	1.8	1.8	1.8	2.4	2.2	2.2
	P7 (0,25;0,25)	1.1	1.2	1.2	1.2	1.6	1.5	1.5

Bearing type	: 6316 C3	6314 C3	Foundation loads	
	: WSeal	WSeal		Max. traction : 929 kgf
	: 16000 h	17000 h		Max. compression : 1470 kgf
	: 34 g	27 g		
	: Mobil Polyrex EM			

This revision replaces and cancel the previous one, which must be eliminated.

(1) Looking the motor from the shaft end.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	13/01/2024		1 / 9	

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Notes
USABLE @208V 188A SF 1.10 SFA 207A

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	13/01/2024		2 / 9	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11413125

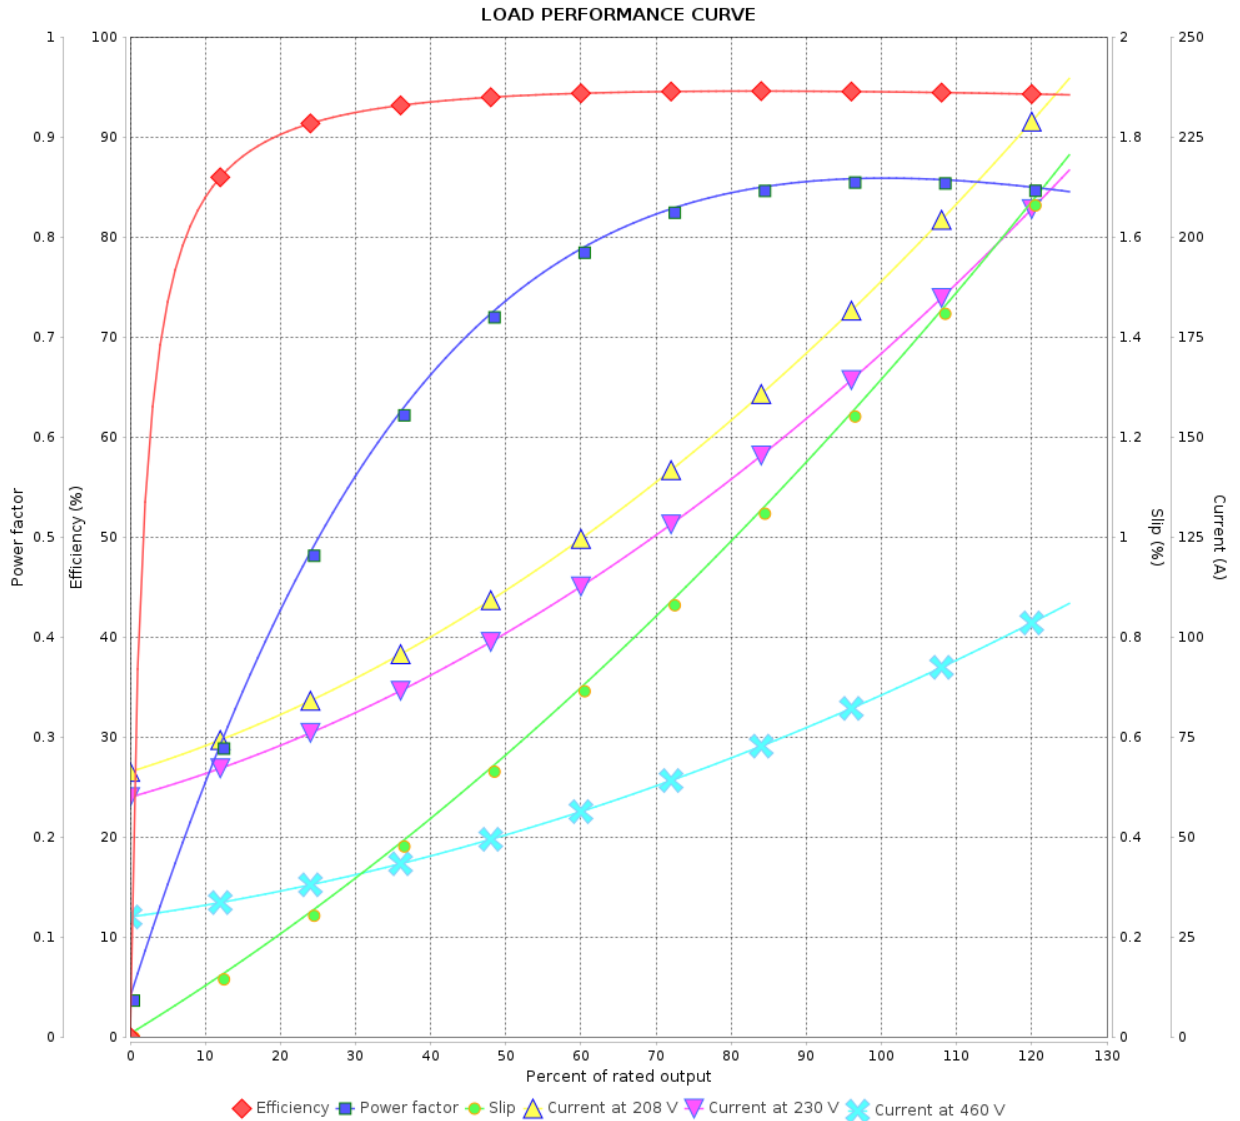

Performance : 230/460 V 60 Hz 6P

Rated current : 170/84.9 A
 LRC : 6.4
 Rated torque : 46.0 kgfm
 Locked rotor torque : 229 %
 Breakdown torque : 229 %
 Rated speed : 1184 rpm

Moment of inertia (J) : 1.69 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.25
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		3 / 9		
Date		13/01/2024		

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11413125

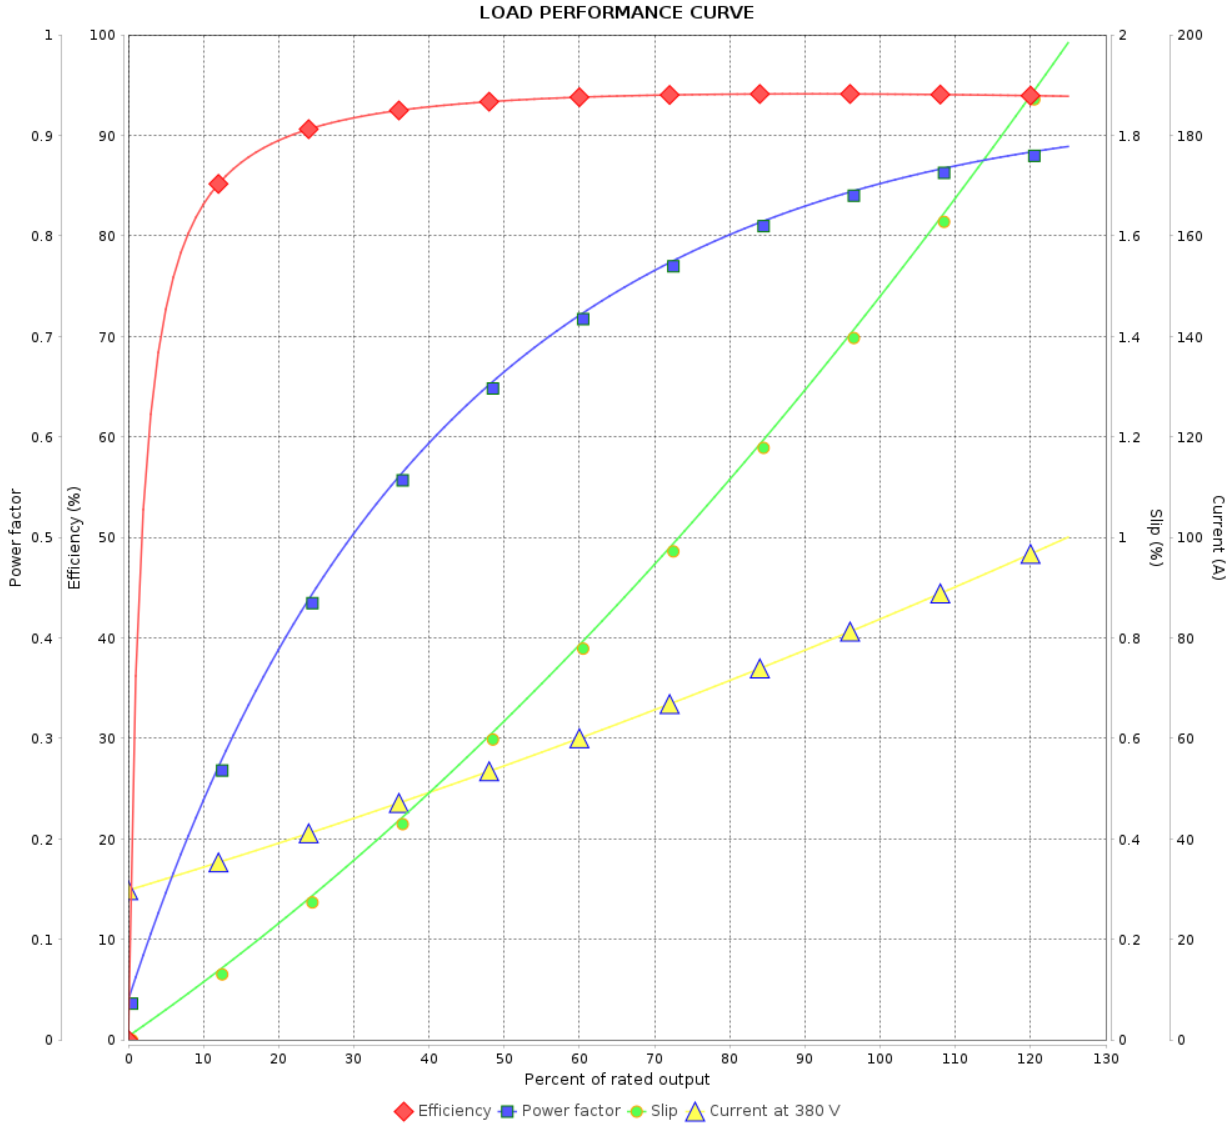

Performance : 380 V 50 Hz 6P IE3

Rated current : 85.5 A
 LRC : 6.4
 Rated torque : 44.2 kgfm
 Locked rotor torque : 200 %
 Breakdown torque : 240 %
 Rated speed : 985 rpm

Moment of inertia (J) : 1.69 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 4 / 9	Revision
Checked by				
Date	13/01/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11413125

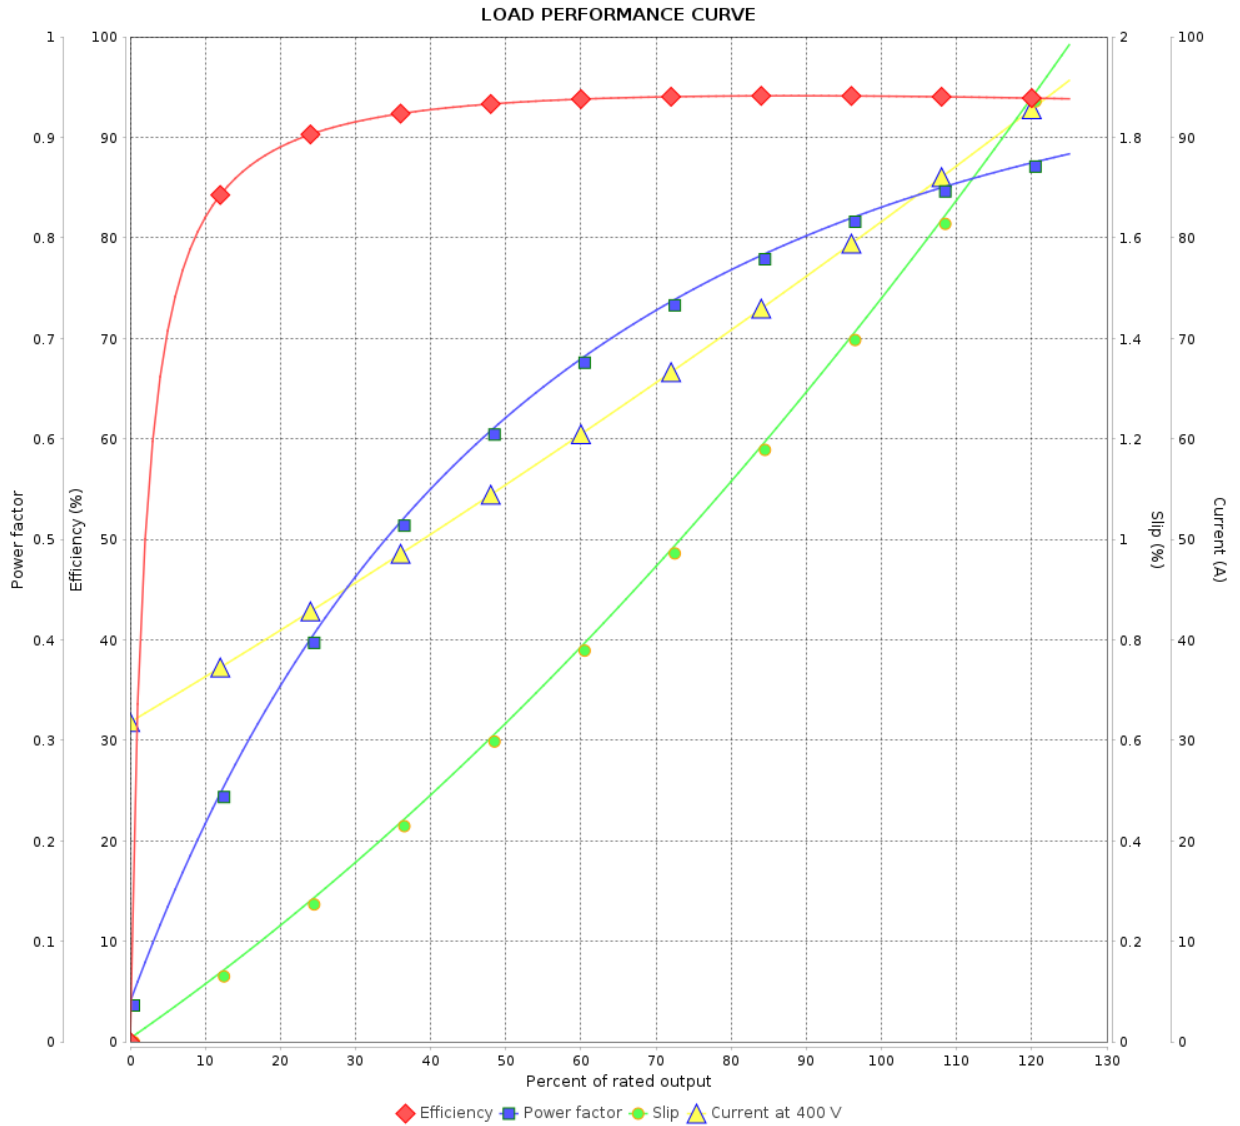

Performance : 400 V 50 Hz 6P IE3

Rated current : 83.2 A
 LRC : 6.9
 Rated torque : 44.2 kgfm
 Locked rotor torque : 240 %
 Breakdown torque : 270 %
 Rated speed : 985 rpm

Moment of inertia (J) : 1.69 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 5 / 9	Revision
Checked by				
Date	13/01/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11413125

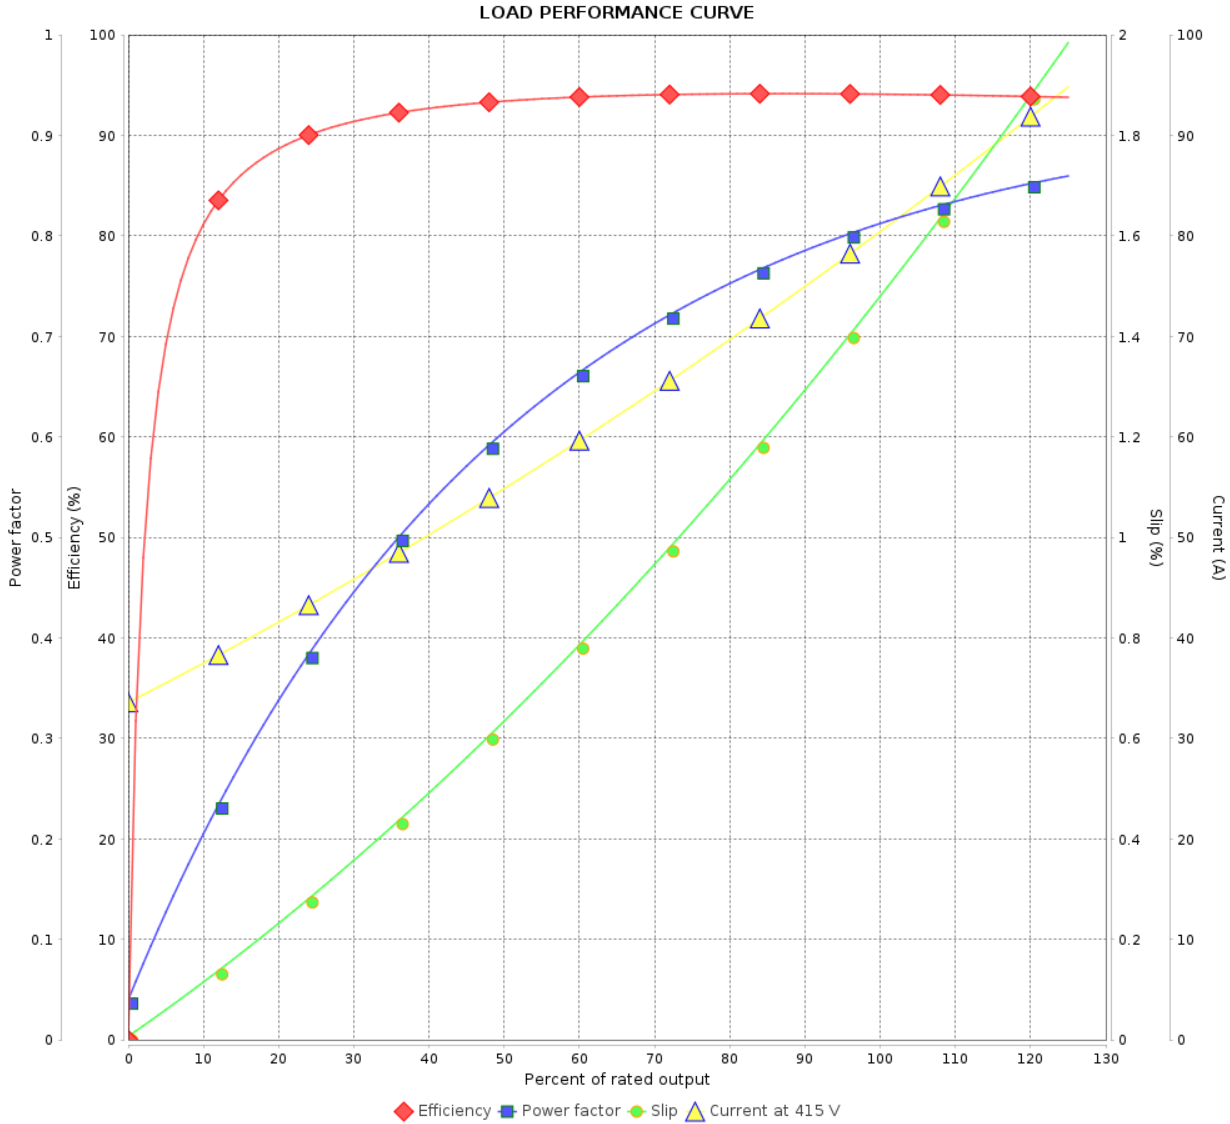

Performance : 415 V 50 Hz 6P IE3

Rated current : 82.1 A
 LRC : 7.3
 Rated torque : 44.2 kgfm
 Locked rotor torque : 270 %
 Breakdown torque : 290 %
 Rated speed : 985 rpm

Moment of inertia (J) : 1.69 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11413125

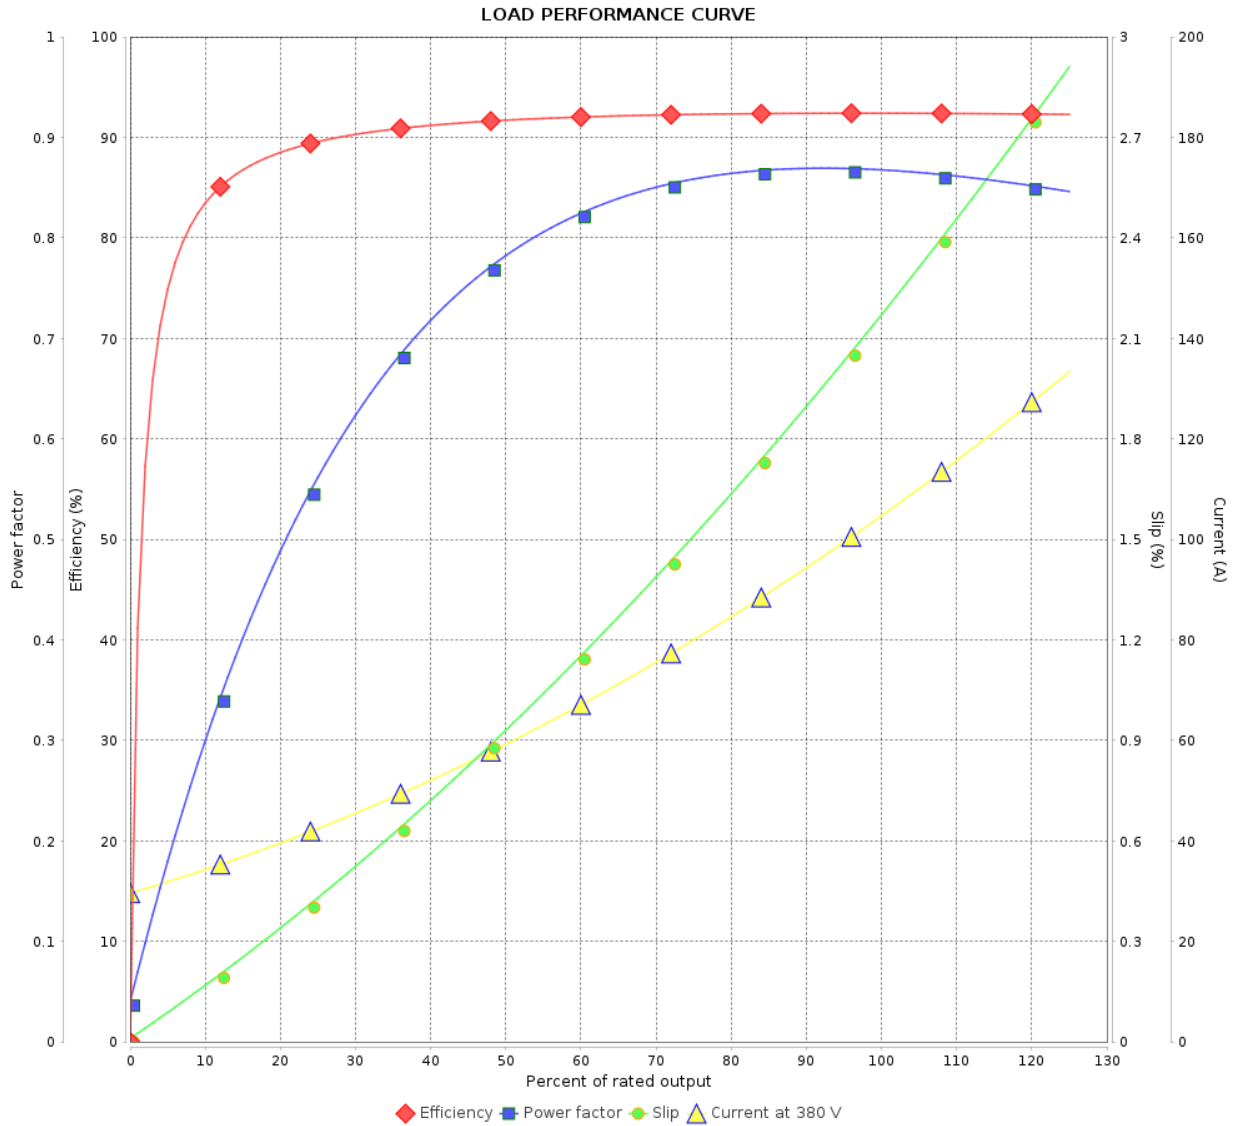

Performance : 380 V 50 Hz 6P IE1

Rated current : 104 A
 LRC : 5.2
 Rated torque : 55.7 kgfm
 Locked rotor torque : 170 %
 Breakdown torque : 180 %
 Rated speed : 978 rpm

Moment of inertia (J) : 1.69 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 105 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11413125

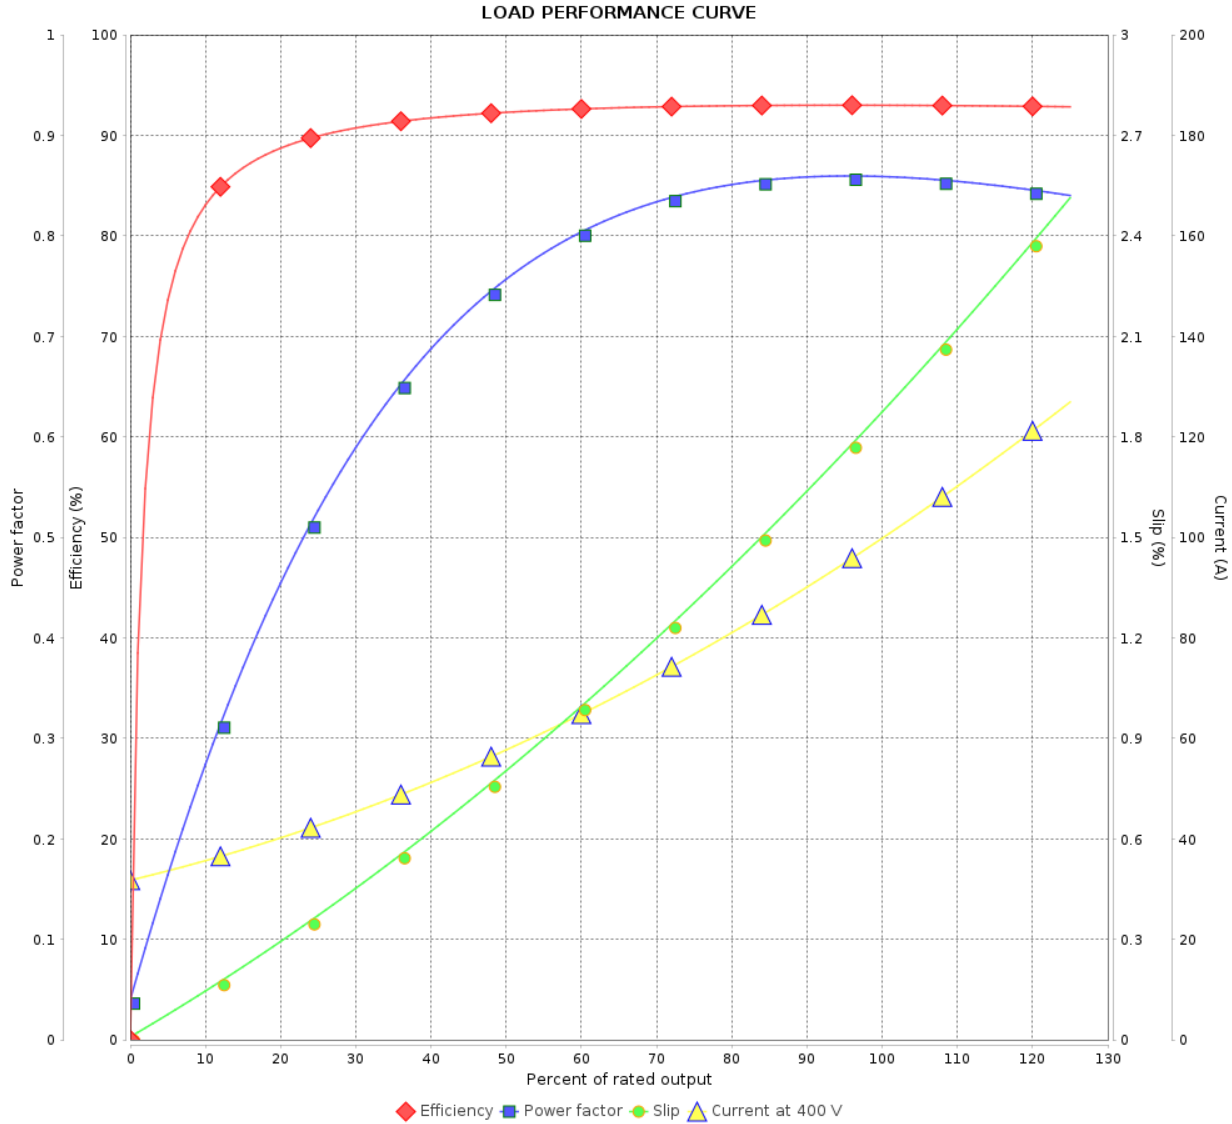

Performance : 400 V 50 Hz 6P IE1

Rated current : 99.3 A
 LRC : 5.7
 Rated torque : 55.5 kgfm
 Locked rotor torque : 190 %
 Breakdown torque : 200 %
 Rated speed : 981 rpm

Moment of inertia (J) : 1.69 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 105 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 8 / 9	Revision
Checked by				
Date	13/01/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11413125

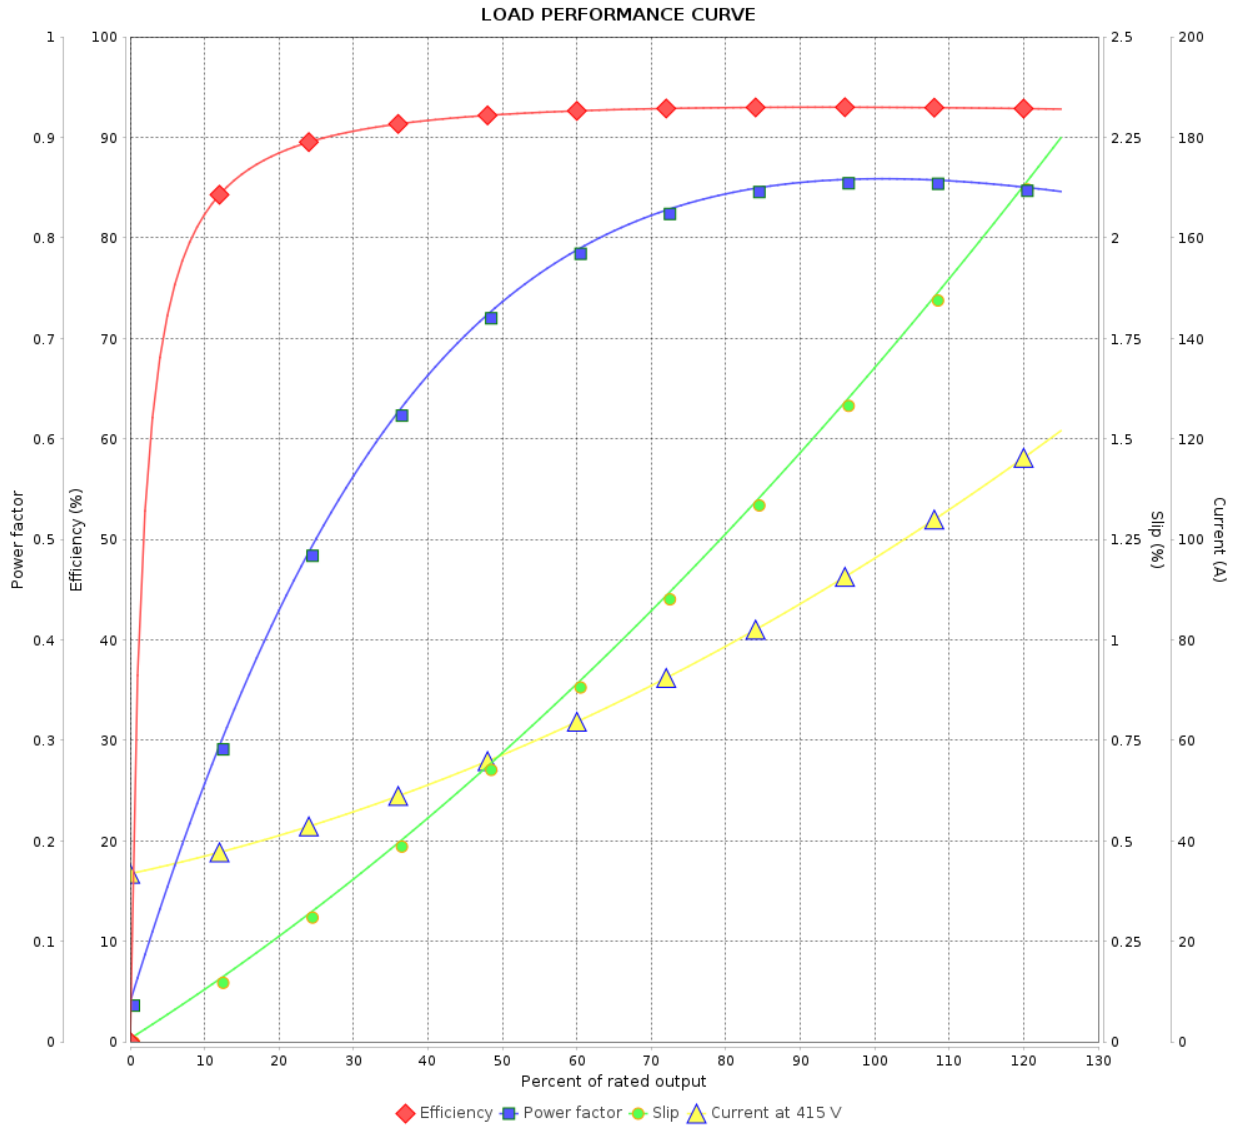

Performance : 415 V 50 Hz 6P IE1

Rated current : 95.7 A
 LRC : 6.2
 Rated torque : 55.4 kgfm
 Locked rotor torque : 210 %
 Breakdown torque : 220 %
 Rated speed : 983 rpm

Moment of inertia (J) : 1.69 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 105 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date				
		9 / 9		