

# DATA SHEET



## Three Phase Induction Motor - Squirrel Cage

Customer : \_\_\_\_\_

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase      Product code : 11431316

Frame	: 182/4T	Cooling method	: IC411 - TEFC
Insulation class	: F	Mounting	: F-1
Duty cycle	: Cont.(S1)	Rotation <sup>1</sup>	: Both (CW and CCW)
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line
Altitude	: 1000 m.a.s.l.	Approx. weight <sup>3</sup>	: 48.5 kg
Protection degree	: IP56	Moment of inertia (J)	: 0.0169 kgm <sup>2</sup>
Design	: B		

Output [HP]	5	4	4	4	5	5	5
Poles	4	4	4	4	4	4	4
Frequency [Hz]	60	50	50	50	50	50	50
Rated voltage [V]	460	380	400	415	380	400	415
Rated current [A]	6.49	6.42	6.21	6.23	7.74	7.44	7.35
L. R. Amperes [A]	50.0	44.9	47.8	51.1	44.9	47.6	50.7
LRC [A]	7.7x(Code J)	7.0x(Code J)	7.7x(Code K)	8.2x(Code L)	5.8x(Code G)	6.4x(Code H)	6.9x(Code J)
No load current [A]	2.90	2.80	3.10	3.30	2.80	3.10	3.30
Rated speed [RPM]	1750	1455	1455	1460	1430	1440	1445
Slip [%]	2.78	3.00	3.00	2.67	4.67	4.00	3.67
Rated torque [kgfm]	2.07	2.00	2.00	1.99	2.54	2.52	2.51
Locked rotor torque [%]	229	229	260	290	185	210	229
Breakdown torque [%]	290	300	300	350	225	250	270
Service factor	1.25	1.15	1.15	1.15	1.15	1.15	1.15
Temperature rise	80 K	80 K	80 K	80 K	80 K	80 K	80 K
Locked rotor time	21s (cold) 12s (hot)	54s (cold) 30s (hot)	48s (cold) 27s (hot)	43s (cold) 24s (hot)	41s (cold) 23s (hot)	39s (cold) 22s (hot)	36s (cold) 20s (hot)
Noise level <sup>2</sup>	56.0 dB(A)	56.0 dB(A)	56.0 dB(A)	56.0 dB(A)	56.0 dB(A)	56.0 dB(A)	56.0 dB(A)
Efficiency (%)	25%						
	50%	88.5	87.5	86.7	86.5	88.5	87.5
	75%	89.5	88.2	88.2	88.2	87.5	88.5
	100%	89.5	87.7	88.2	88.2	86.5	87.5
Power Factor	25%						
	50%	0.62	0.61	0.57	0.53	0.69	0.65
	75%	0.74	0.75	0.71	0.67	0.80	0.77
	100%	0.80	0.81	0.79	0.76	0.84	0.80

Losses at normative operating points (speed;torque), in percentage of rated output power

Losses (%)	P1 (0,9;1,0)	11.3	13.6	12.9	12.9	15.1	13.8	13.8
	P2 (0,5;1,0)	9.5	11.4	10.9	10.9	12.7	11.6	11.6
	P3 (0,25;1,0)	8.7	10.4	10.0	10.0	11.6	10.6	10.6
	P4 (0,9;0,5)	5.5	6.5	6.2	6.2	7.3	6.7	6.7
	P5 (0,5;0,5)	3.8	4.5	4.3	4.3	5.0	4.6	4.6
	P6 (0,5;0,25)	2.5	3.0	2.9	2.9	3.4	3.1	3.1
	P7 (0,25;0,25)	1.8	2.2	2.1	2.1	2.4	2.2	2.2

Bearing type	: 6207 C3	6206 C3	Foundation loads		
	Sealing	Inpro/Seal		Max. traction	: 118 kgf
	Lubrication interval	20000 h		Max. compression	: 166 kgf
	Lubricant amount	7 g		5 g	
	Lubricant type	Mobil Polyrex EM			

This revision replaces and cancel the previous one, which must be eliminated.

(1) Looking the motor from the shaft end.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	13/01/2024		1 / 9	

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Notes

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	13/01/2024		2 / 9	

# LOAD PERFORMANCE CURVE


## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase

Product code : 11431316

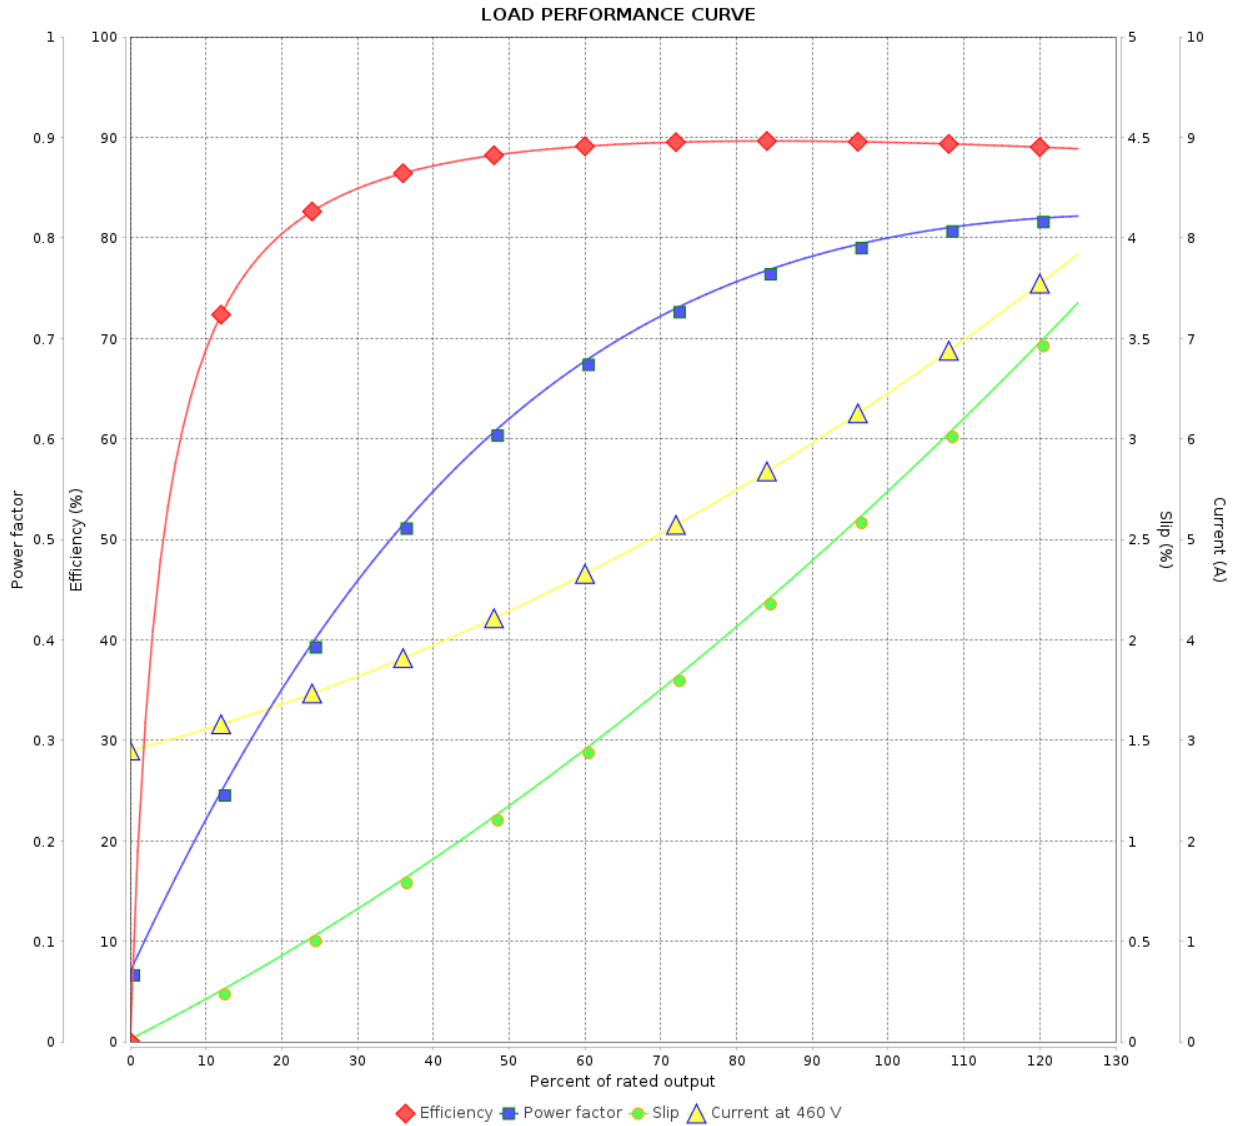

Performance : 460 V 60 Hz 4P

Rated current : 6.49 A  
 LRC : 7.7  
 Rated torque : 2.07 kgfm  
 Locked rotor torque : 229 %  
 Breakdown torque : 290 %  
 Rated speed : 1750 rpm

Moment of inertia (J) : 0.0169 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.25  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase      Product code : 11431316

LOAD PERFORMANCE CURVE

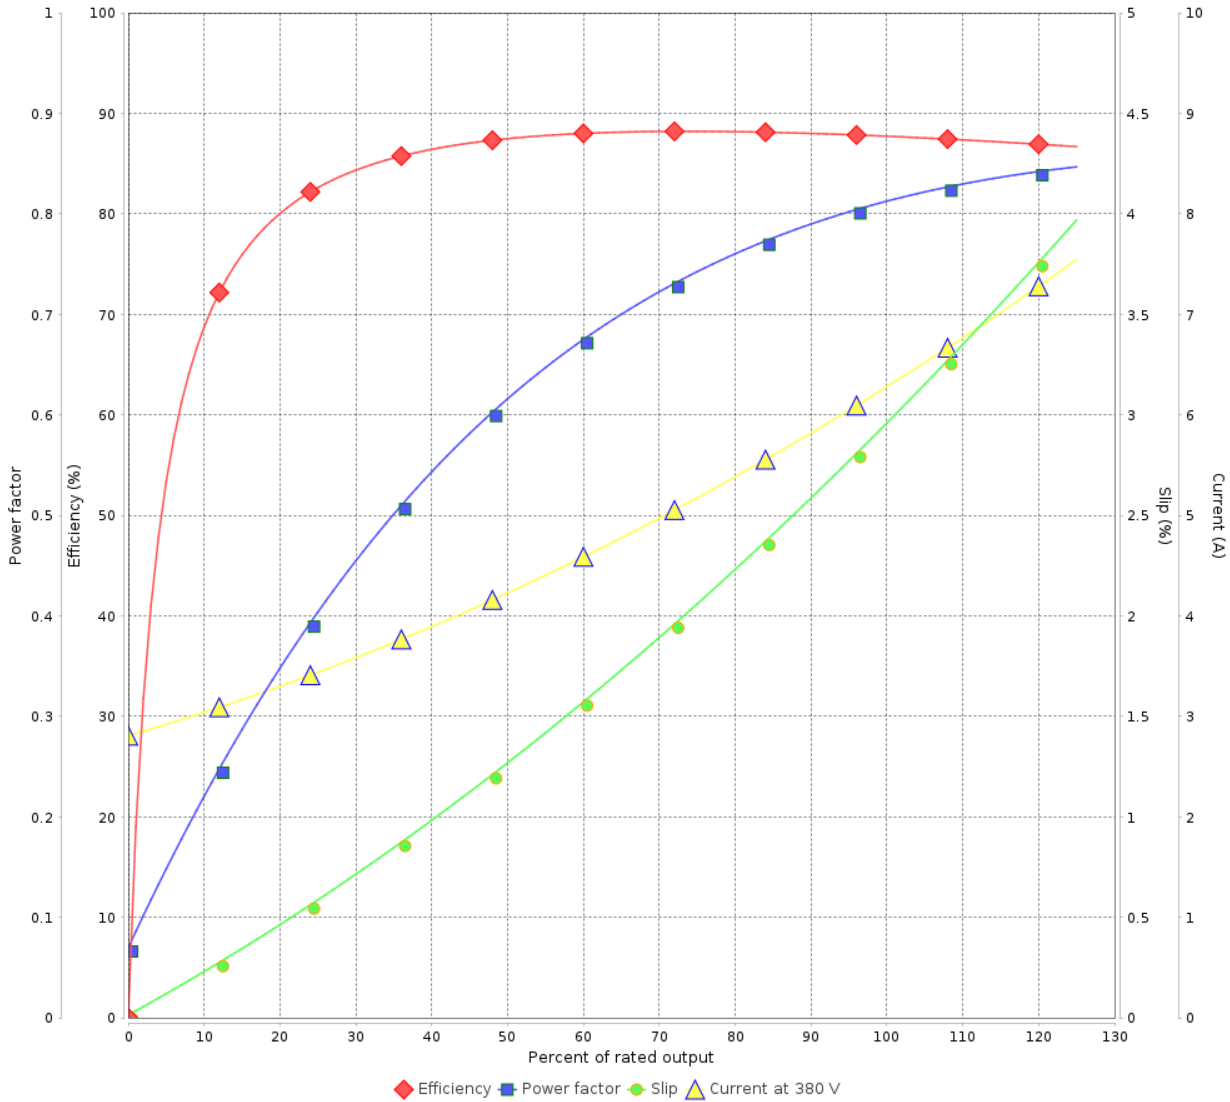

Performance : 380 V 50 Hz 4P IE3

Rated current	: 6.42 A	Moment of inertia (J)	: 0.0169 kgm <sup>2</sup>
LRC	: 7.0	Duty cycle	: Cont.(S1)
Rated torque	: 2.00 kgfm	Insulation class	: F
Locked rotor torque	: 229 %	Service factor	: 1.15
Breakdown torque	: 300 %	Temperature rise	: 80 K
Rated speed	: 1455 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by			4 / 9	
Date	13/01/2024			

# LOAD PERFORMANCE CURVE


## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase

Product code : 11431316

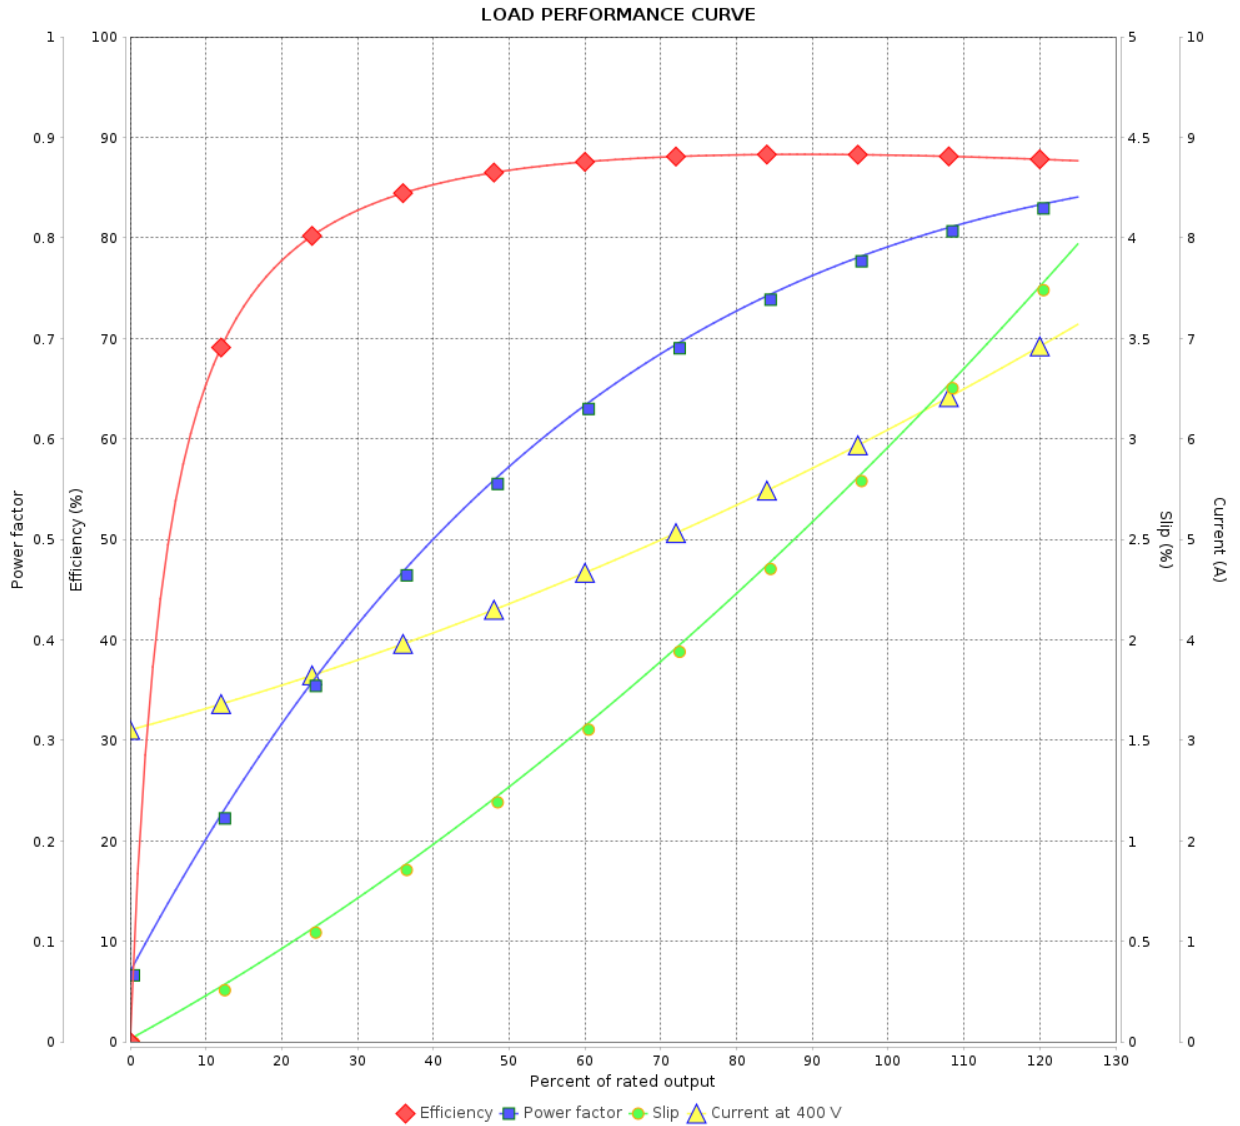

Performance : 400 V 50 Hz 4P IE3

Rated current : 6.21 A  
 LRC : 7.7  
 Rated torque : 2.00 kgfm  
 Locked rotor torque : 260 %  
 Breakdown torque : 300 %  
 Rated speed : 1455 rpm

Moment of inertia (J) : 0.0169 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		5 / 9		
Date		13/01/2024		

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase      Product code : 11431316

LOAD PERFORMANCE CURVE

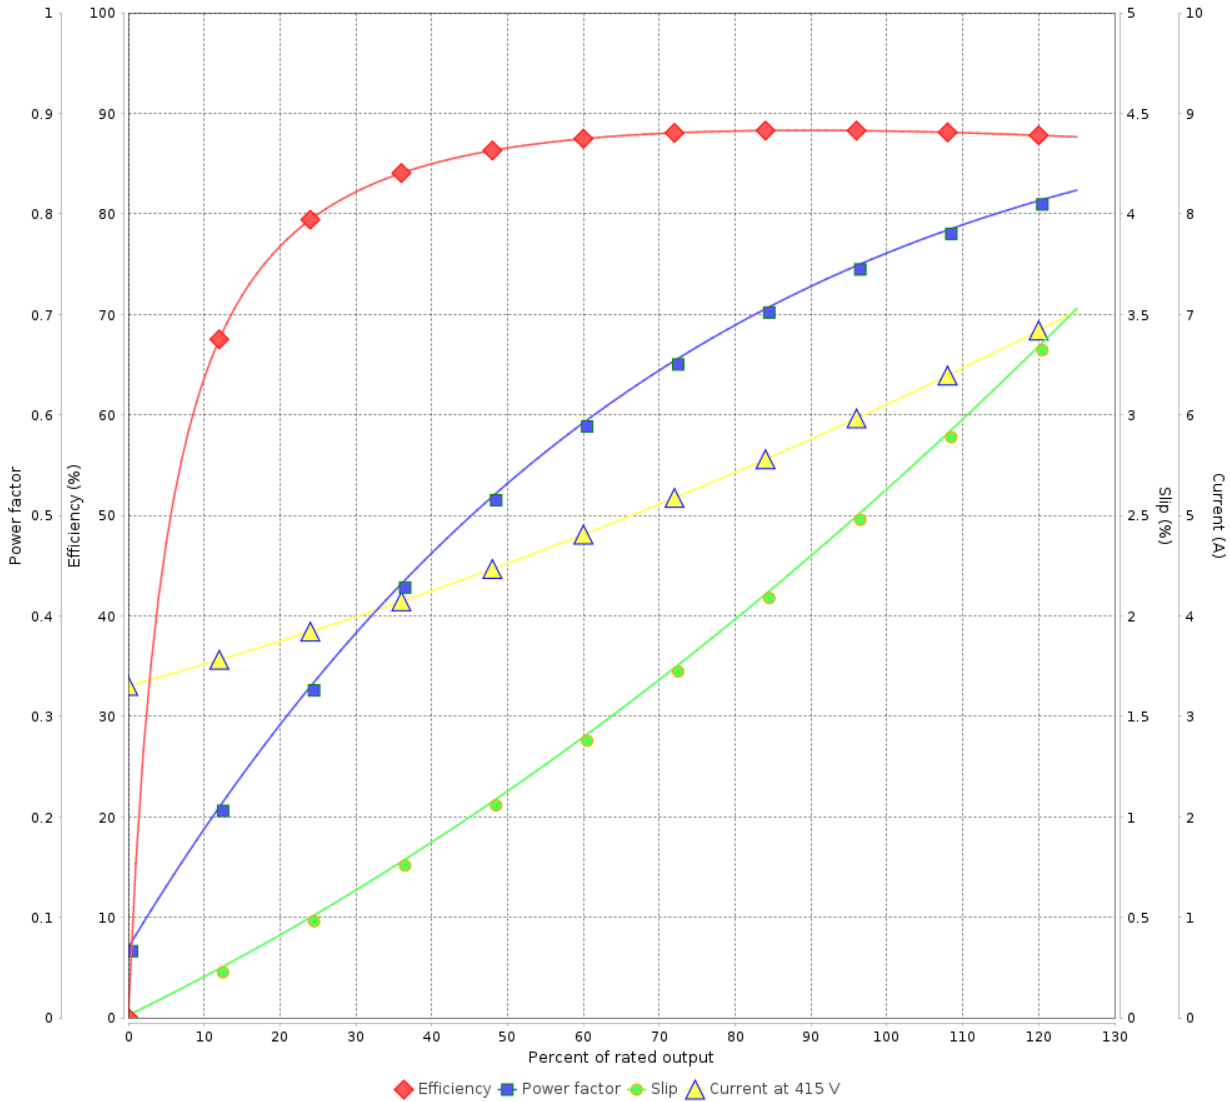

Performance : 415 V 50 Hz 4P IE3

Rated current	: 6.23 A	Moment of inertia (J)	: 0.0169 kgm <sup>2</sup>
LRC	: 8.2	Duty cycle	: Cont.(S1)
Rated torque	: 1.99 kgfm	Insulation class	: F
Locked rotor torque	: 290 %	Service factor	: 1.15
Breakdown torque	: 350 %	Temperature rise	: 80 K
Rated speed	: 1460 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		6 / 9		
Date	13/01/2024			

# LOAD PERFORMANCE CURVE




## Three Phase Induction Motor - Squirrel Cage

Customer : \_\_\_\_\_

Product line : W22 IEEE 841 NEMA Premium Efficiency  
Three-Phase

Product code : 11431316

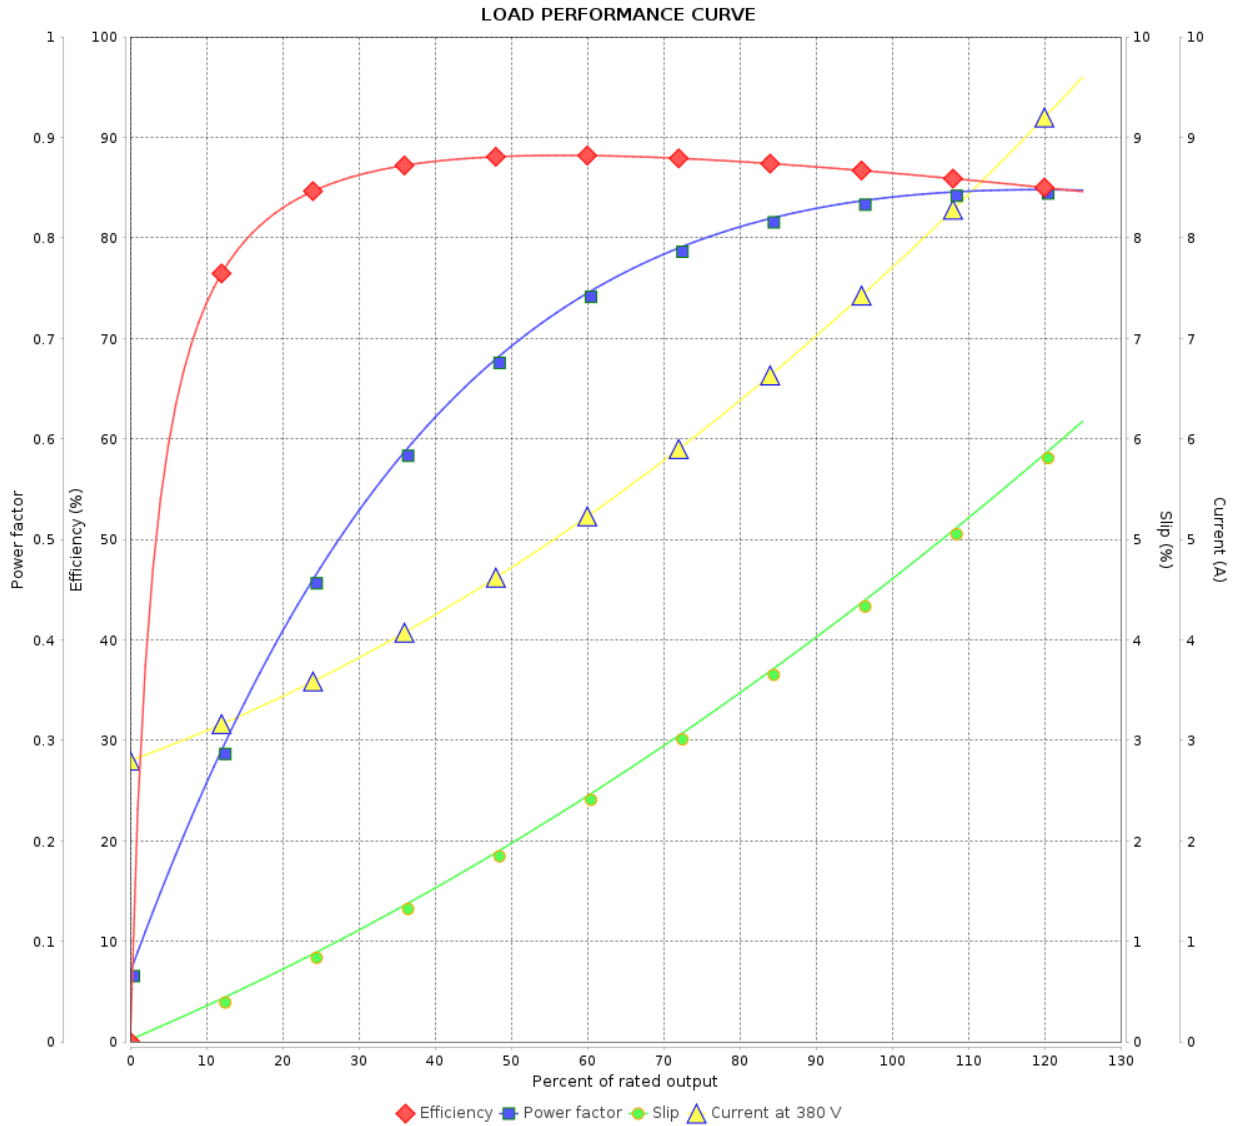

Performance : 380 V 50 Hz 4P IE2

Rated current : 7.74 A  
 LRC : 5.8  
 Rated torque : 2.54 kgfm  
 Locked rotor torque : 185 %  
 Breakdown torque : 225 %  
 Rated speed : 1430 rpm

Moment of inertia (J) : 0.0169 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 7 / 9		Revision
Checked by				
Date 13/01/2024				

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase      Product code : 11431316

LOAD PERFORMANCE CURVE

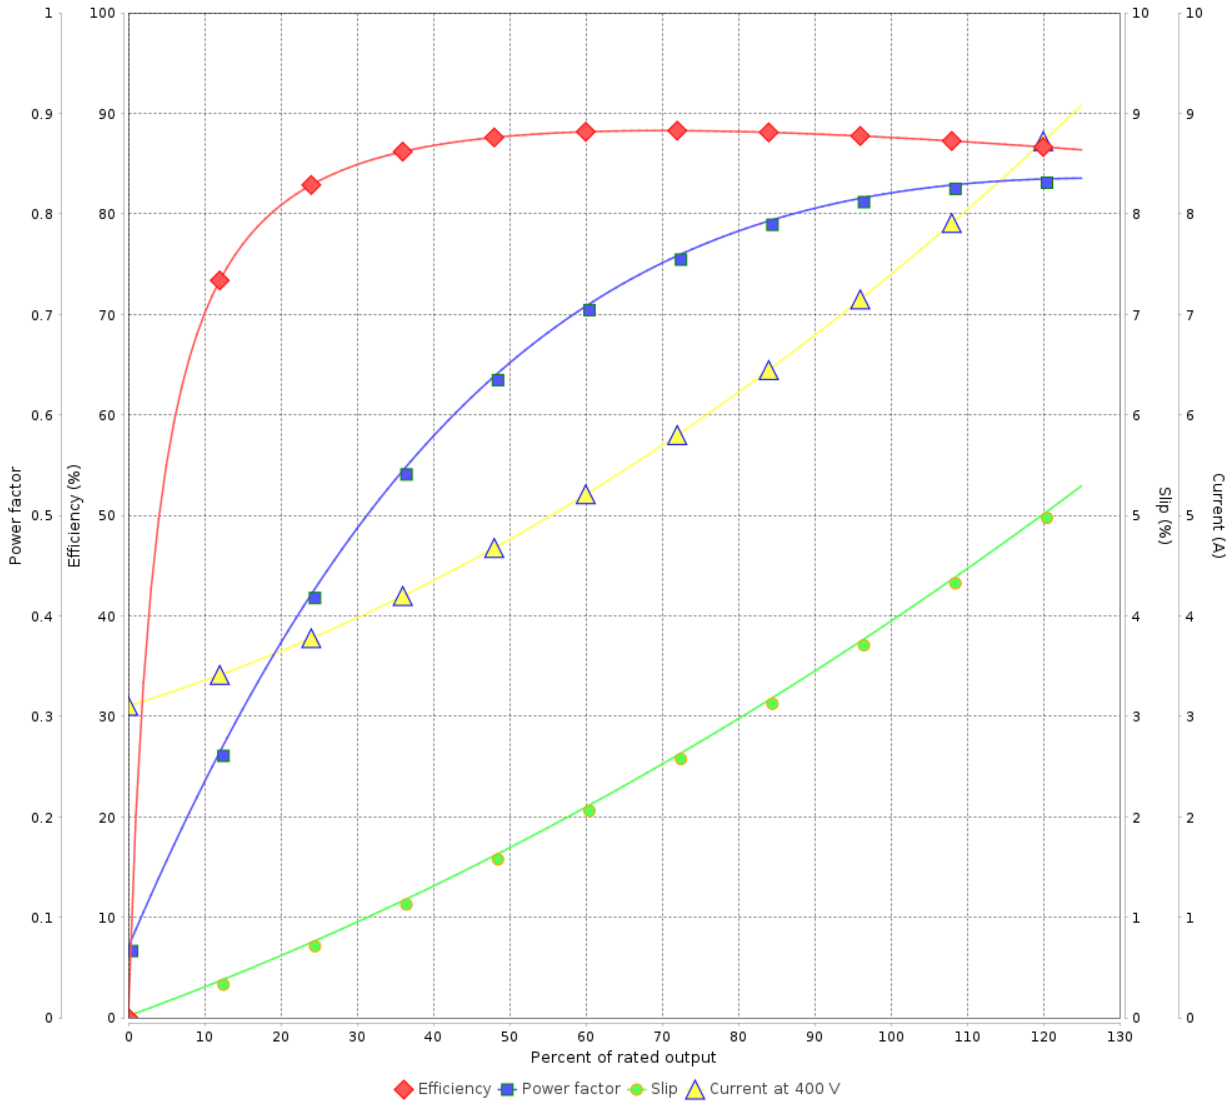

Performance : 400 V 50 Hz 4P IE2

Rated current	: 7.44 A	Moment of inertia (J)	: 0.0169 kgm <sup>2</sup>
LRC	: 6.4	Duty cycle	: Cont.(S1)
Rated torque	: 2.52 kgfm	Insulation class	: F
Locked rotor torque	: 210 %	Service factor	: 1.15
Breakdown torque	: 250 %	Temperature rise	: 80 K
Rated speed	: 1440 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				



# LOAD PERFORMANCE CURVE


## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase

Product code : 11431316

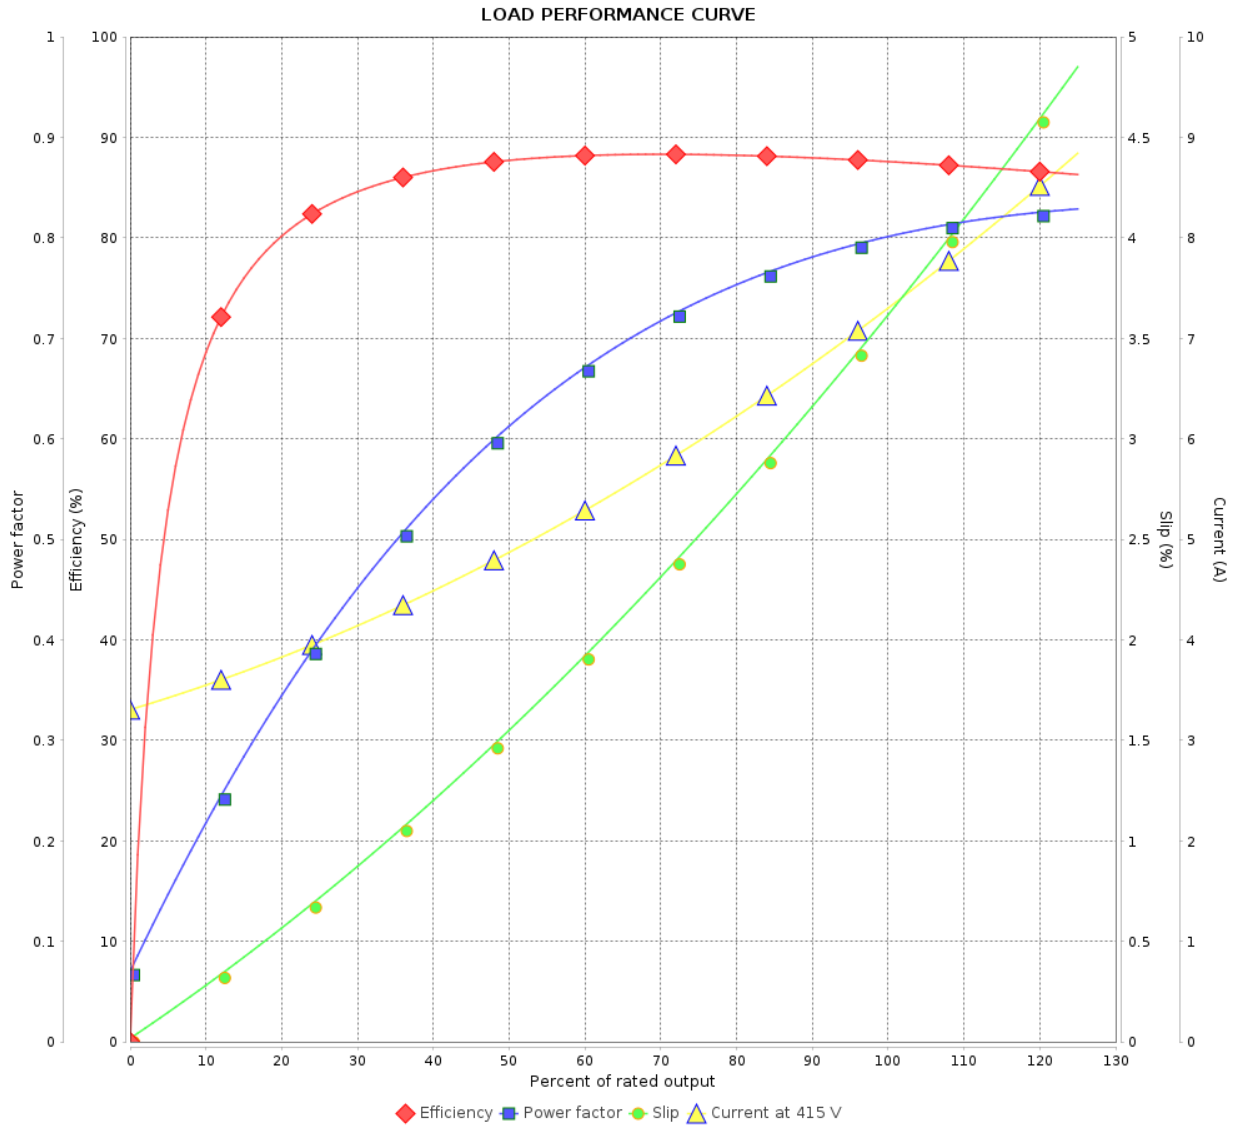

Performance : 415 V 50 Hz 4P IE2

Rated current : 7.35 A  
 LRC : 6.9  
 Rated torque : 2.51 kgfm  
 Locked rotor torque : 229 %  
 Breakdown torque : 270 %  
 Rated speed : 1445 rpm

Moment of inertia (J) : 0.0169 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				