

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase Product code : 11431840

Frame	: 444/5T	Cooling method	: IC411 - TEFC
Insulation class	: F	Mounting	: F-1
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 683 kg
Protection degree	: IP56	Moment of inertia (J)	: 3.10 kgm ²
Design	: B		

Output [HP]	75	60	60	60	75	75	75
Poles	8	8	8	8	8	8	8
Frequency [Hz]	60	50	50	50	50	50	50
Rated voltage [V]	460	380	400	415	380	400	415
Rated current [A]	93.4	95.5	95.8	94.9	114	109	106
L. R. Amperes [A]	598	525	565	607	536	567	604
LRC [A]	6.4x(Code H)	5.5x(Code G)	5.9x(Code H)	6.4x(Code J)	4.7x(Code E)	5.2x(Code F)	5.7x(Code G)
No load current [A]	40.0	39.3	43.6	47.0	39.3	43.6	47.0
Rated speed [RPM]	890	740	740	740	735	735	740
Slip [%]	1.11	1.33	1.33	1.33	2.00	2.00	1.33
Rated torque [kgfm]	61.2	58.8	58.8	58.8	74.1	74.1	73.6
Locked rotor torque [%]	170	170	200	220	140	160	180
Breakdown torque [%]	200	210	229	250	170	190	210
Service factor	1.25	1.00	1.00	1.00	1.00	1.00	1.00
Temperature rise	80 K	80 K	80 K	80 K	105 K	105 K	105 K
Locked rotor time	32s (cold) 18s (hot)	72s (cold) 40s (hot)	64s (cold) 36s (hot)	61s (cold) 34s (hot)	46s (cold) 26s (hot)	46s (cold) 26s (hot)	48s (cold) 27s (hot)
Noise level ²	63.0 dB(A)	59.0 dB(A)	59.0 dB(A)	59.0 dB(A)	59.0 dB(A)	59.0 dB(A)	59.0 dB(A)
Efficiency (%)	25%						
	50%	93.0	92.6	91.3	91.2	91.5	92.0
	75%	93.6	93.0	92.6	92.5	91.7	92.4
	100%	93.6	93.0	92.9	92.9	91.7	92.4
Power Factor	25%						
	50%	0.64	0.56	0.52	0.49	0.70	0.66
	75%	0.74	0.69	0.65	0.62	0.77	0.75
	100%	0.79	0.77	0.73	0.71	0.80	0.78

Losses at normative operating points (speed;torque), in percentage of rated output power

Losses (%)	P1 (0,9;1,0)	6.6	6.6	6.6	6.6	6.6	6.6
	P2 (0,5;1,0)	5.2	5.2	5.2	5.2	5.2	5.2
	P3 (0,25;1,0)	4.7	4.7	4.7	4.7	4.7	4.7
	P4 (0,9;0,5)	3.3	3.3	3.3	3.3	3.3	3.3
	P5 (0,5;0,5)	2.2	2.2	2.2	2.2	2.2	2.2
	P6 (0,5;0,25)	1.5	1.5	1.5	1.5	1.5	1.5
	P7 (0,25;0,25)	1.0	1.0	1.0	1.0	1.0	1.0

Bearing type	: 6319 C3	6316 C3	Foundation loads			
	Sealing	Inpro/Seal		Max. traction	: 1009 kgf	
	Lubrication interval	17000 h		20000 h	Max. compression	: 1693 kgf
	Lubricant amount	45 g		34 g		
	Lubricant type	Mobil Polyrex EM				

This revision replaces and cancel the previous one, which must be eliminated.

(1) Looking the motor from the shaft end.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	22/10/2023		1 / 9	

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Notes

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	22/10/2023		2 / 9	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase

Product code : 11431840

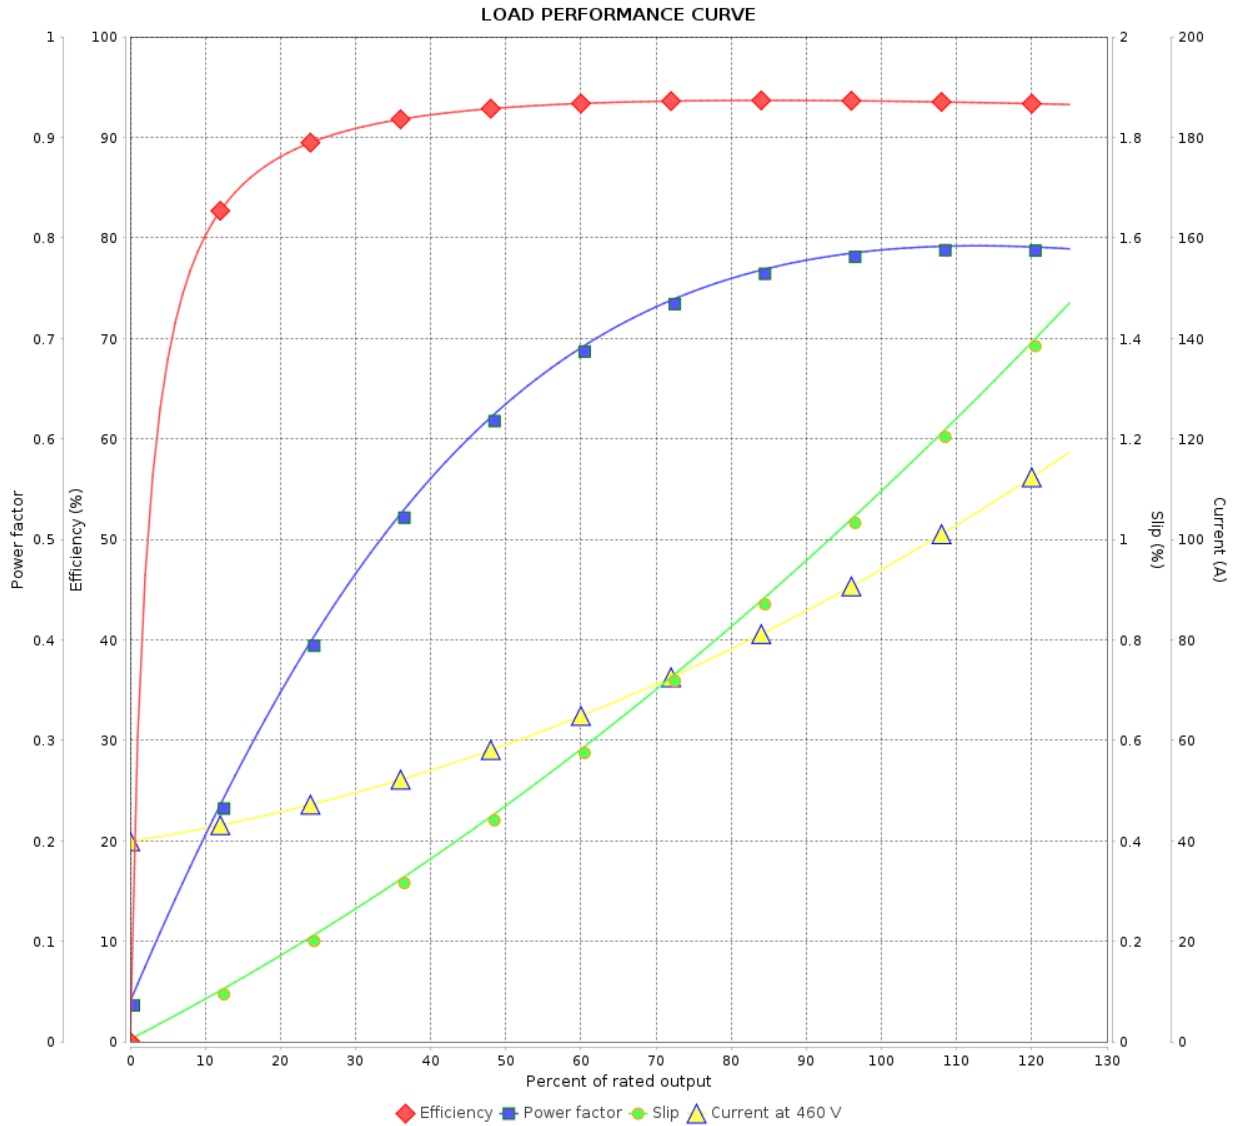

Performance : 460 V 60 Hz 8P

Rated current : 93.4 A
 LRC : 6.4
 Rated torque : 61.2 kgfm
 Locked rotor torque : 170 %
 Breakdown torque : 200 %
 Rated speed : 890 rpm

Moment of inertia (J) : 3.10 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.25
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		3 / 9		
Date		22/10/2023		


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase Product code : 11431840

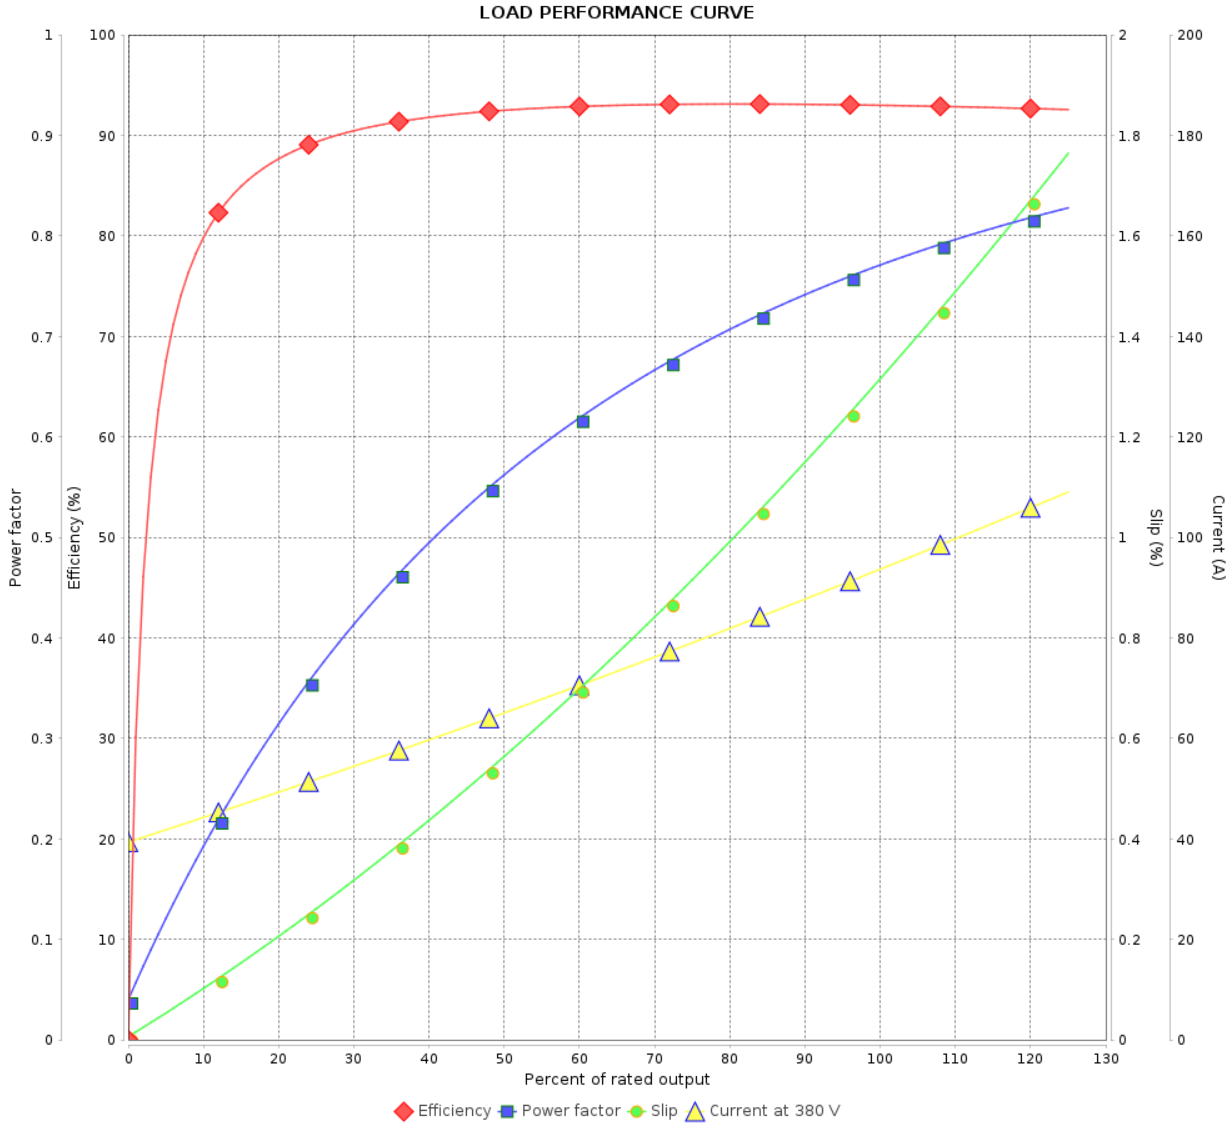

Performance : 380 V 50 Hz 8P IE3

Rated current	: 95.5 A	Moment of inertia (J)	: 3.10 kgm ²
LRC	: 5.5	Duty cycle	: Cont.(S1)
Rated torque	: 58.8 kgfm	Insulation class	: F
Locked rotor torque	: 170 %	Service factor	: 1.00
Breakdown torque	: 210 %	Temperature rise	: 80 K
Rated speed	: 740 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 4 / 9	Revision
Checked by				
Date	22/10/2023			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase

Product code : 11431840

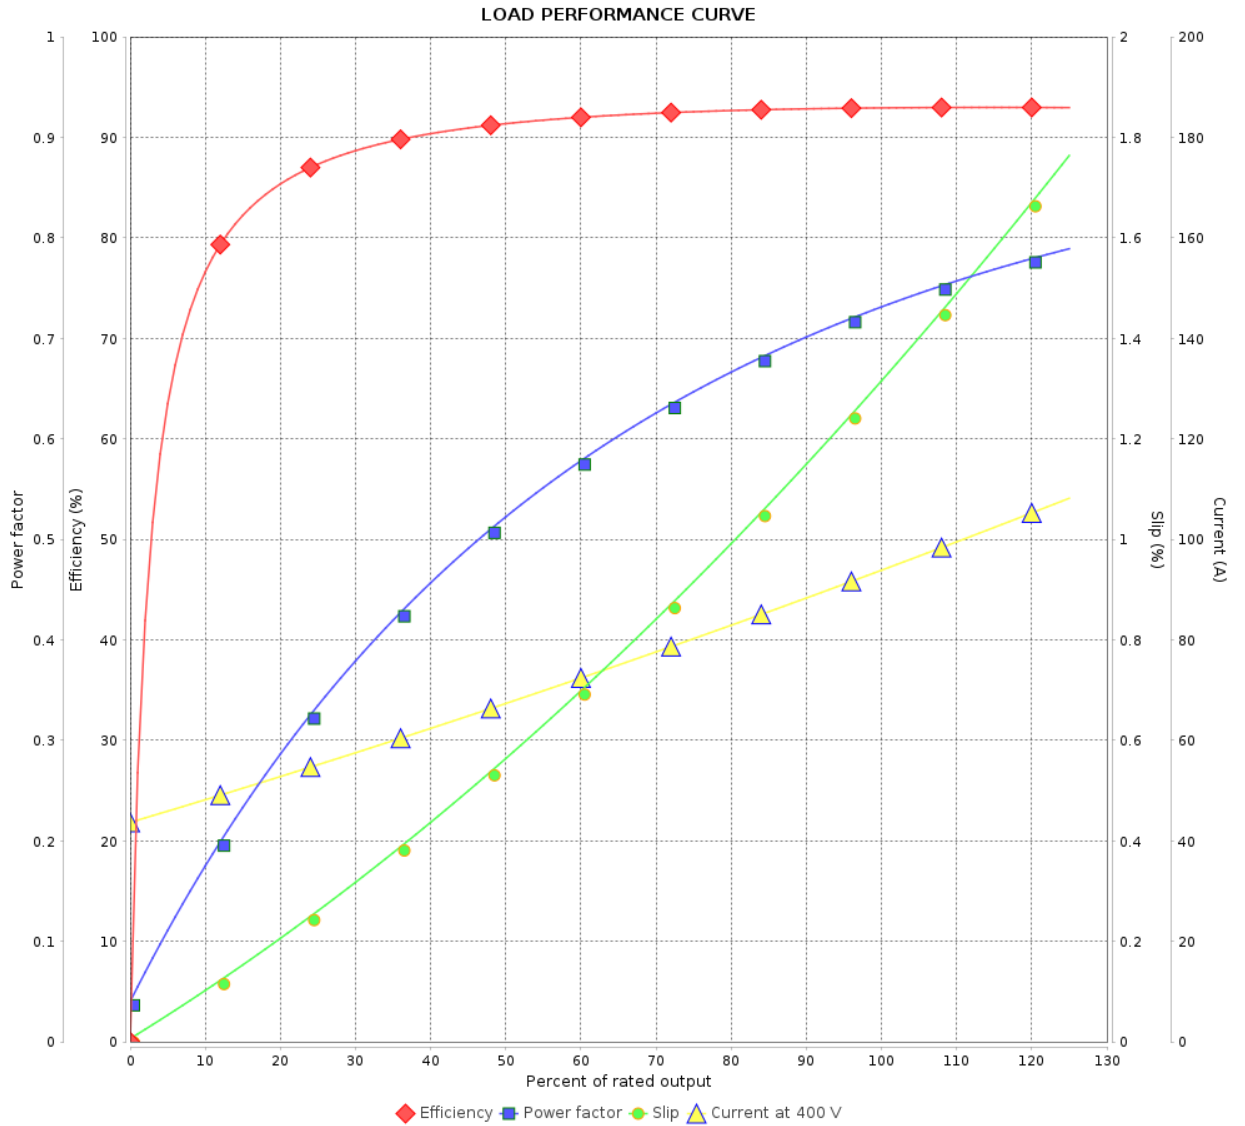

Performance : 400 V 50 Hz 8P IE3

Rated current : 95.8 A
 LRC : 5.9
 Rated torque : 58.8 kgfm
 Locked rotor torque : 200 %
 Breakdown torque : 229 %
 Rated speed : 740 rpm

Moment of inertia (J) : 3.10 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		5 / 9		
Date		22/10/2023		

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase Product code : 11431840

LOAD PERFORMANCE CURVE

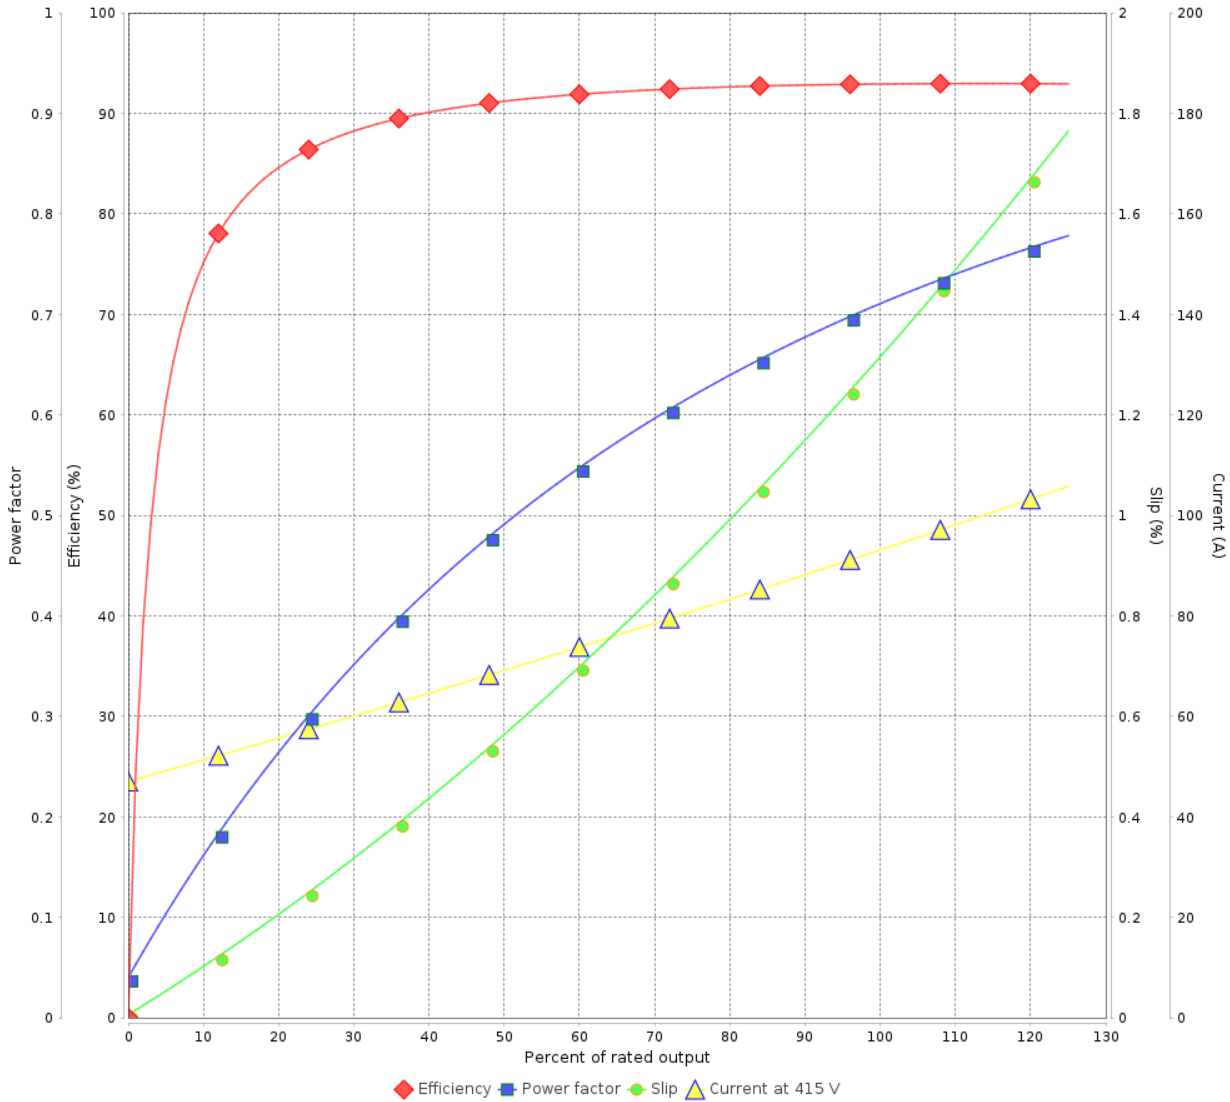

Performance : 415 V 50 Hz 8P IE3

Rated current	: 94.9 A	Moment of inertia (J)	: 3.10 kgm ²
LRC	: 6.4	Duty cycle	: Cont.(S1)
Rated torque	: 58.8 kgfm	Insulation class	: F
Locked rotor torque	: 220 %	Service factor	: 1.00
Breakdown torque	: 250 %	Temperature rise	: 80 K
Rated speed	: 740 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 6 / 9	Revision
Checked by				
Date	22/10/2023			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase

Product code : 11431840

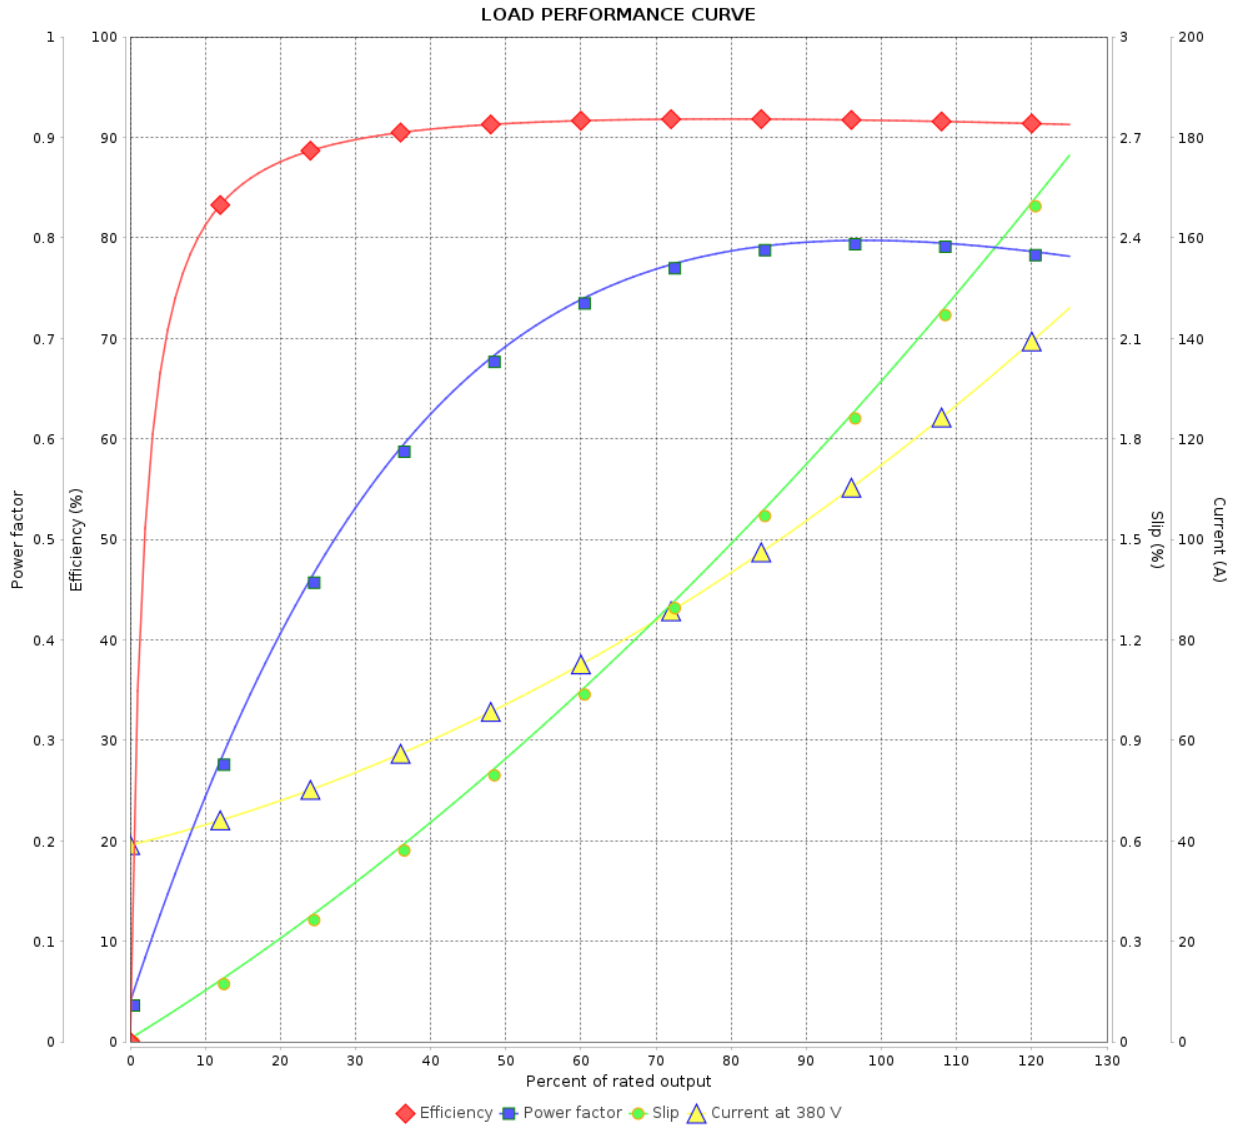

Performance : 380 V 50 Hz 8P IE2

Rated current : 114 A
 LRC : 4.7
 Rated torque : 74.1 kgfm
 Locked rotor torque : 140 %
 Breakdown torque : 170 %
 Rated speed : 735 rpm

Moment of inertia (J) : 3.10 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 105 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date				
		Page	Revision	
		7 / 9		

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase Product code : 11431840

LOAD PERFORMANCE CURVE

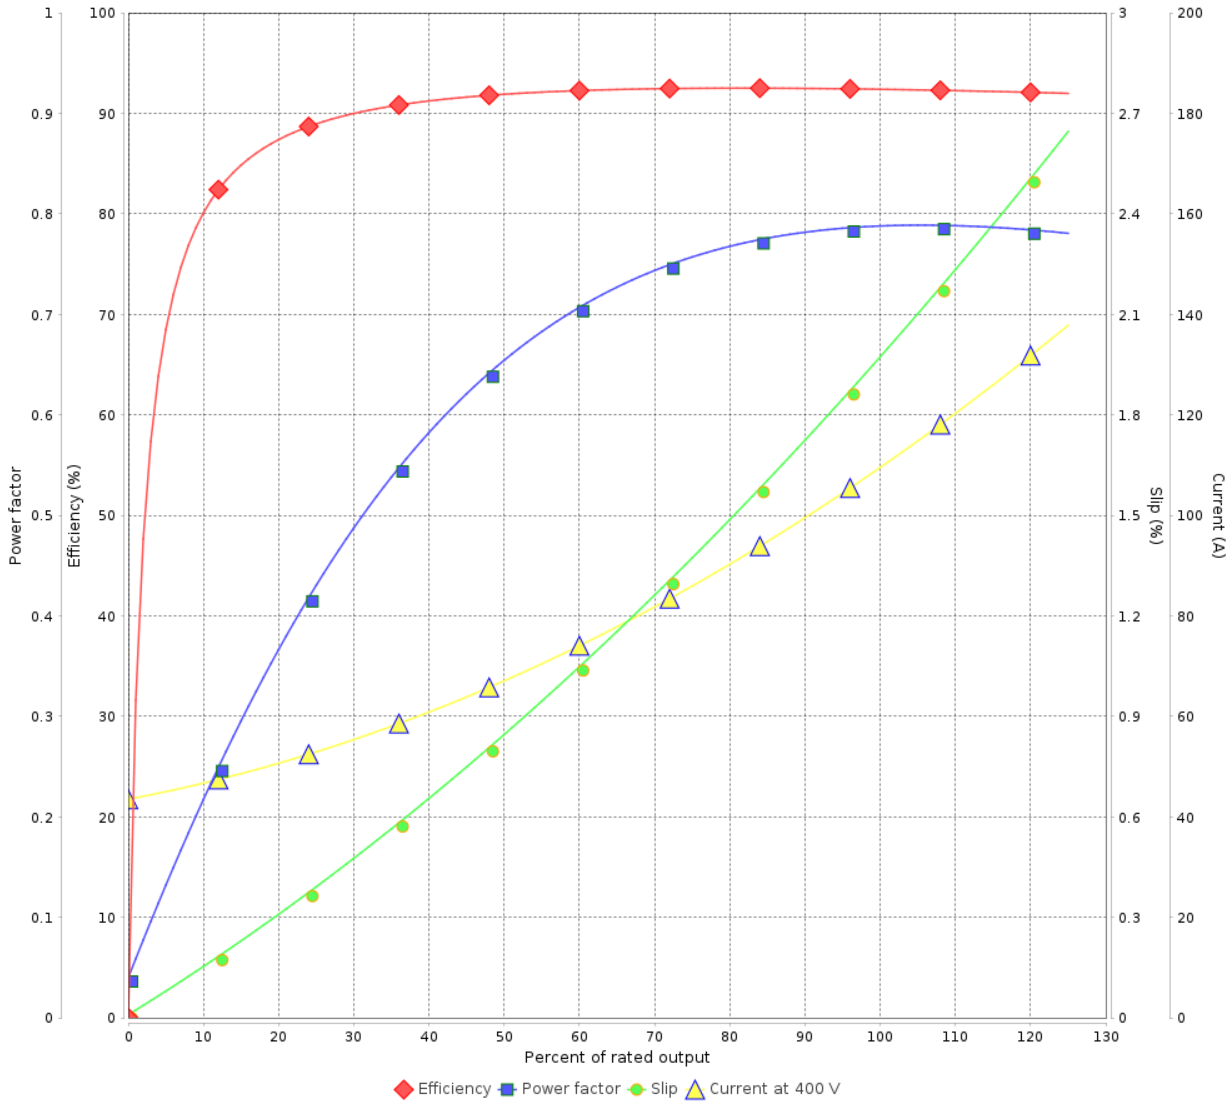

Performance : 400 V 50 Hz 8P IE2

Rated current	: 109 A	Moment of inertia (J)	: 3.10 kgm ²
LRC	: 5.2	Duty cycle	: Cont.(S1)
Rated torque	: 74.1 kgfm	Insulation class	: F
Locked rotor torque	: 160 %	Service factor	: 1.00
Breakdown torque	: 190 %	Temperature rise	: 105 K
Rated speed	: 735 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 8 / 9	Revision
Checked by				
Date	22/10/2023			


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase Product code : 11431840

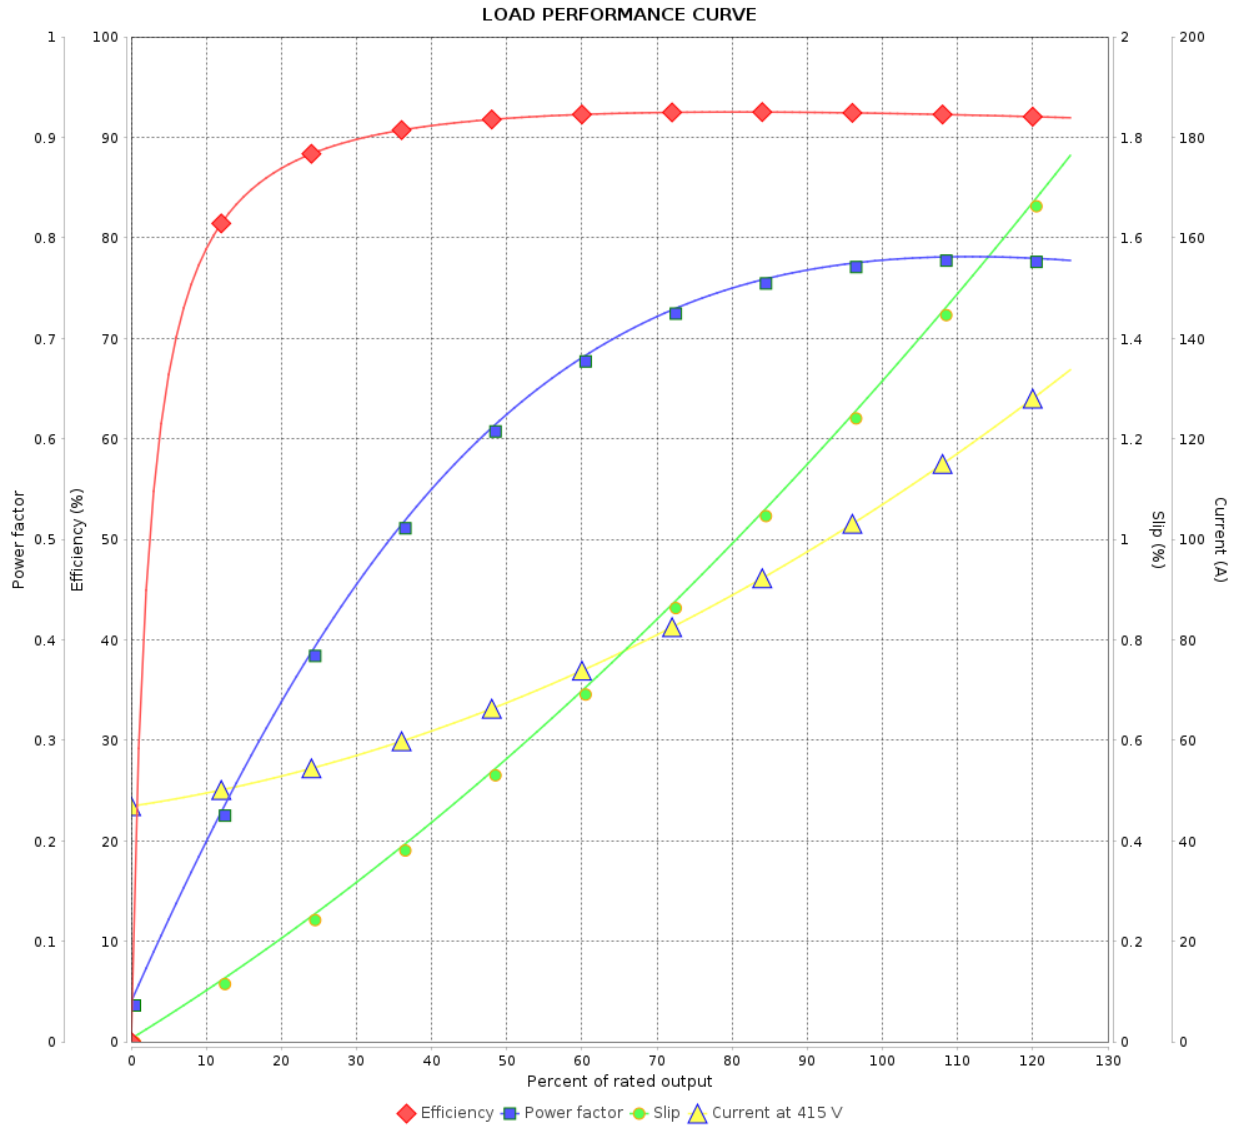

Performance : 415 V 50 Hz 8P IE2

Rated current : 106 A
 LRC : 5.7
 Rated torque : 73.6 kgfm
 Locked rotor torque : 180 %
 Breakdown torque : 210 %
 Rated speed : 740 rpm

Moment of inertia (J) : 3.10 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 105 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date				
		Page	Revision	
		9 / 9		