

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer :							
Product line	: W22 IEEE 841 NEMA Premium Efficiency Three-Phase	Product code :	11432497				
Frame	: 143/5T	Cooling method	: IC411 - TEFC				
Insulation class	: F	Mounting	: F-1				
Duty cycle	: Cont.(S1)	Rotation <sup>1</sup>	: Both (CW and CCW)				
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line				
Altitude	: 1000 m.a.s.l.	Approx. weight <sup>3</sup>	: 30.3 kg				
Protection degree	: IP56	Moment of inertia (J)	: 0.0067 kgm <sup>2</sup>				
Design	: B						
Output [HP]	1	0.75	0.75	0.75	1	1	1
Poles	6	6	6	6	6	6	6
Frequency [Hz]	60	50	50	50	50	50	50
Rated voltage [V]	460	380	400	415	380	400	415
Rated current [A]	1.73	1.60	1.62	1.66	1.96	1.94	1.95
L. R. Amperes [A]	10.7	9.28	9.88	10.5	9.41	10.1	10.7
LRC [A]	6.2x(Code K)	5.8x(Code K)	6.1x(Code L)	6.3x(Code M)	4.8x(Code G)	5.2x(Code H)	5.5x(Code J)
No load current [A]	1.10	1.05	1.15	1.25	1.05	1.15	1.25
Rated speed [RPM]	1160	960	970	970	940	950	950
Slip [%]	3.33	4.00	3.00	3.00	6.00	5.00	5.00
Rated torque [kgfm]	0.626	0.567	0.561	0.561	0.772	0.764	0.764
Locked rotor torque [%]	260	280	300	320	200	229	250
Breakdown torque [%]	300	310	330	340	220	260	280
Service factor	1.25	1.00	1.00	1.00	1.00	1.00	1.00
Temperature rise	80 K	80 K	80 K	80 K	80 K	80 K	80 K
Locked rotor time	50s (cold) 28s (hot)	36s (cold) 20s (hot)	36s (cold) 20s (hot)	36s (cold) 20s (hot)	36s (cold) 20s (hot)	36s (cold) 20s (hot)	36s (cold) 20s (hot)
Noise level <sup>2</sup>	50.0 dB(A)	45.0 dB(A)	45.0 dB(A)	45.0 dB(A)	45.0 dB(A)	45.0 dB(A)	45.0 dB(A)
Efficiency (%)	25%						
	50%	77.0	74.8	73.2	70.7	77.0	74.0
	75%	82.0	78.4	77.5	75.8	80.0	78.5
	100%	82.5	79.3	78.9	77.9	78.5	78.5
Power Factor	25%						
	50%	0.45	0.44	0.41	0.38	0.53	0.46
	75%	0.57	0.57	0.53	0.50	0.66	0.59
	100%	0.66	0.66	0.62	0.59	0.74	0.68
Losses at normative operating points (speed;torque), in percentage of rated output power							
Losses (%)	P1 (0,9;1,0)	20.0	20.0	20.0	20.0	20.0	20.0
	P2 (0,5;1,0)	16.7	16.7	16.7	16.7	16.7	16.7
	P3 (0,25;1,0)	16.9	16.9	16.9	16.9	16.9	16.9
	P4 (0,9;0,5)	12.6	12.6	12.6	12.6	12.6	12.6
	P5 (0,5;0,5)	9.2	9.2	9.2	9.2	9.2	9.2
	P6 (0,5;0,25)	7.6	7.6	7.6	7.6	7.6	7.6
	P7 (0,25;0,25)	5.8	5.8	5.8	5.8	5.8	5.8
Bearing type	: Drive end : 6205 C3	Non drive end : 6204 C3	Foundation loads				
Sealing	: Inpro/Seal	Inpro/Seal	Max. traction : 46 kgf				
Lubrication interval	: 20000 h	20000 h	Max. compression : 76 kgf				
Lubricant amount	: 4 g	4 g					
Lubricant type	: Mobil Polyrex EM						
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end.				These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.			
Rev.	Changes Summary			Performed	Checked	Date	
Performed by							
Checked by						Page	Revision
Date	13/01/2024					1 / 9	

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Notes

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	13/01/2024		2 / 9	


# LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase      Product code : 11432497

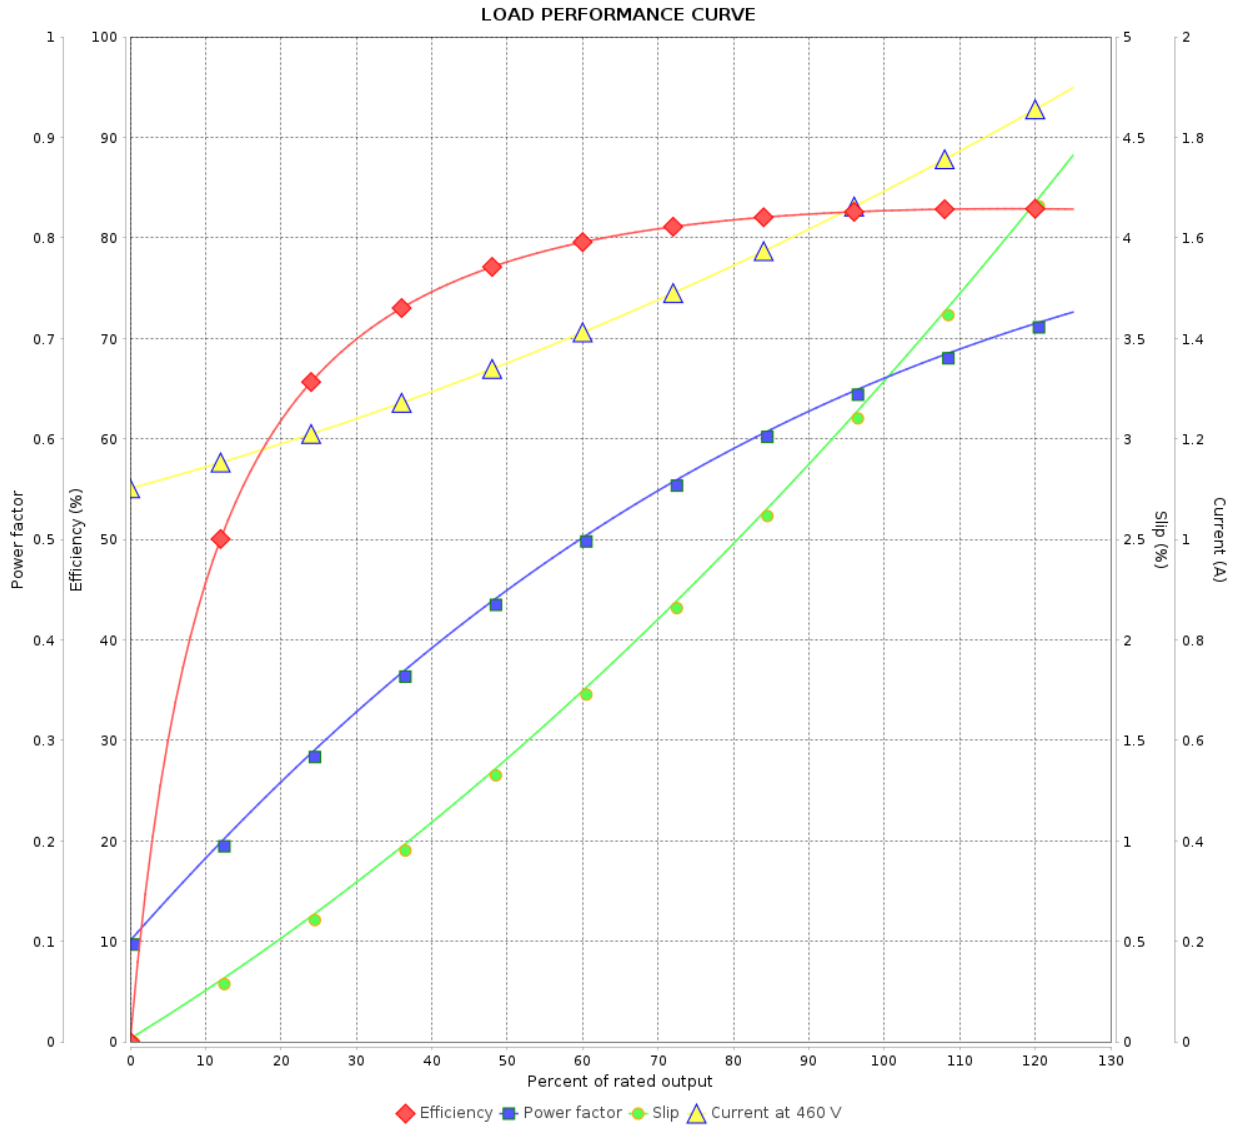

Performance : 460 V 60 Hz 6P

Rated current : 1.73 A  
 LRC : 6.2  
 Rated torque : 0.626 kgfm  
 Locked rotor torque : 260 %  
 Breakdown torque : 300 %  
 Rated speed : 1160 rpm

Moment of inertia (J) : 0.0067 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.25  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase      Product code : 11432497

LOAD PERFORMANCE CURVE

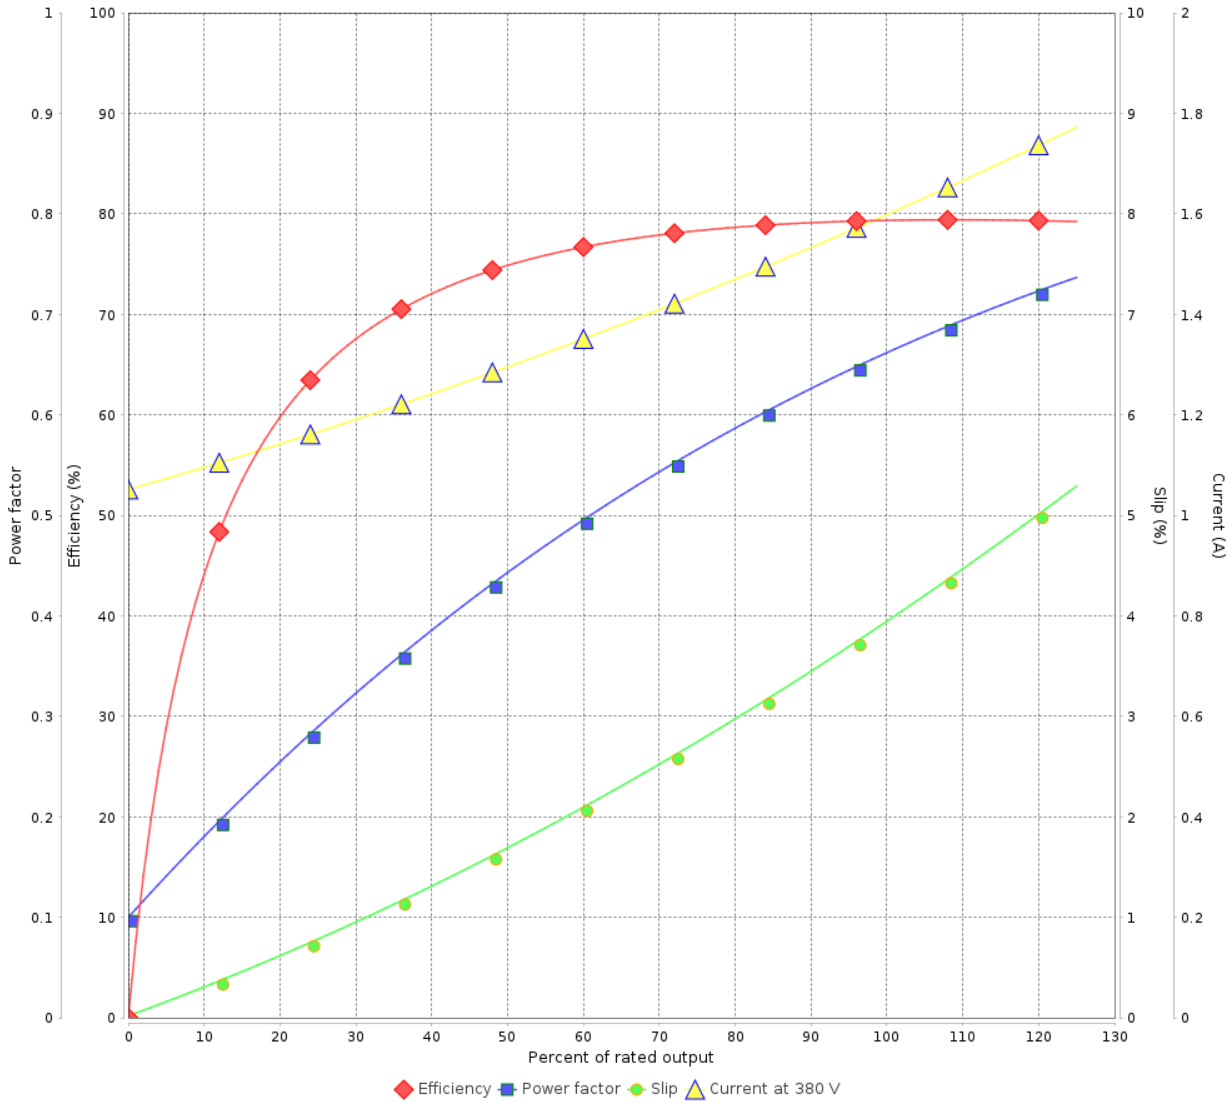

Performance : 380 V 50 Hz 6P IE3

Rated current	: 1.60 A	Moment of inertia (J)	: 0.0067 kgm <sup>2</sup>
LRC	: 5.8	Duty cycle	: Cont.(S1)
Rated torque	: 0.567 kgfm	Insulation class	: F
Locked rotor torque	: 280 %	Service factor	: 1.00
Breakdown torque	: 310 %	Temperature rise	: 80 K
Rated speed	: 960 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		4 / 9		
Date	13/01/2024			

# LOAD PERFORMANCE CURVE


## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase

Product code : 11432497

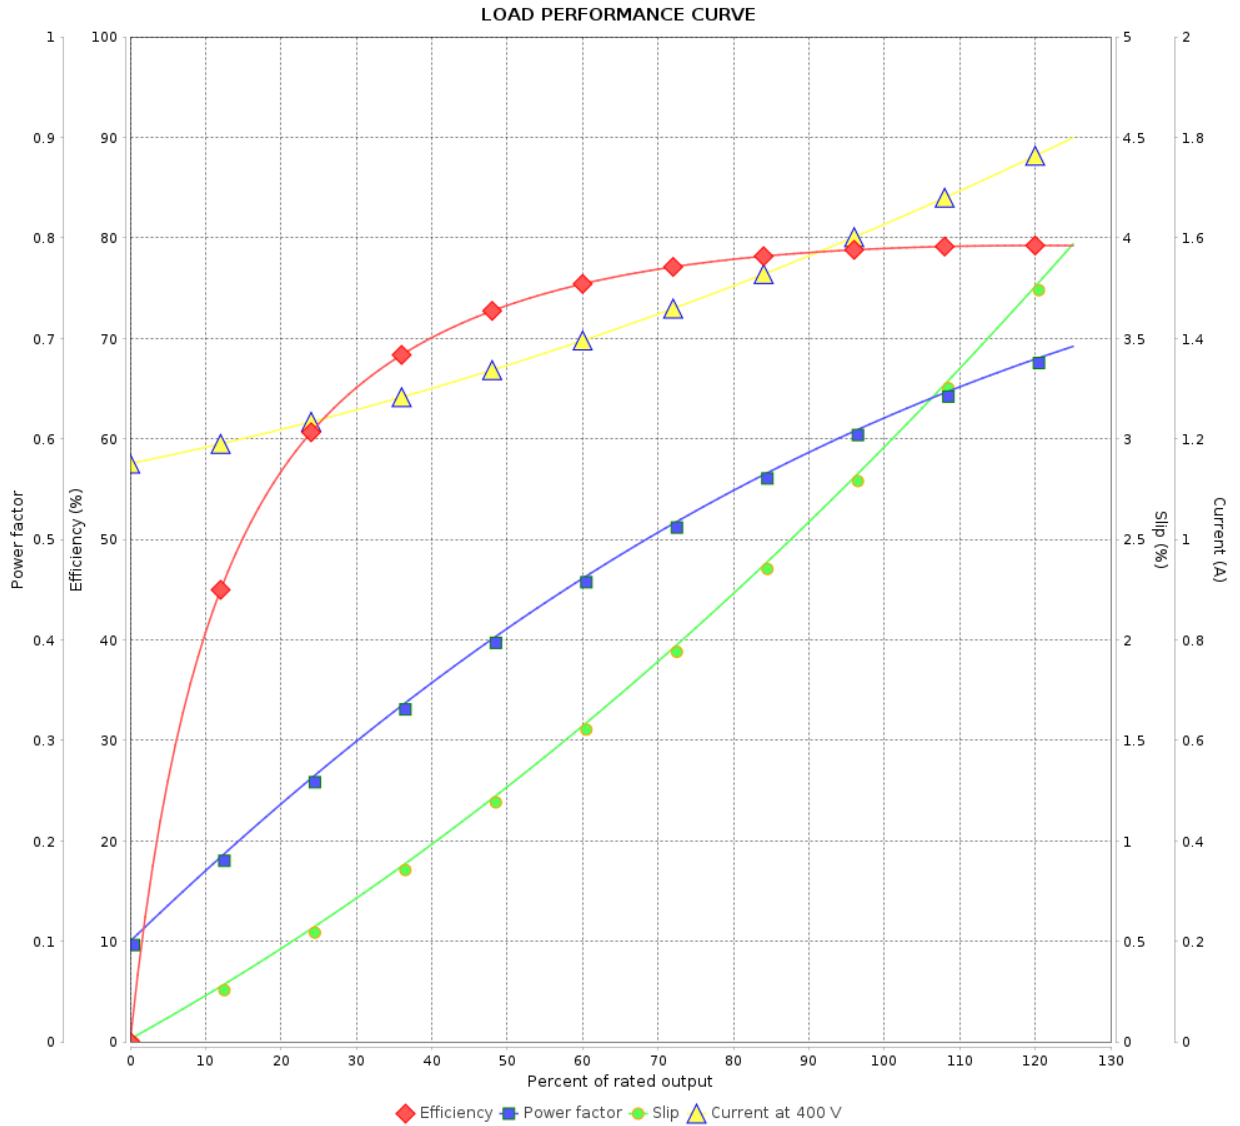

Performance : 400 V 50 Hz 6P IE3

Rated current : 1.62 A  
 LRC : 6.1  
 Rated torque : 0.561 kgfm  
 Locked rotor torque : 300 %  
 Breakdown torque : 330 %  
 Rated speed : 970 rpm

Moment of inertia (J) : 0.0067 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.00  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase      Product code : 11432497

LOAD PERFORMANCE CURVE

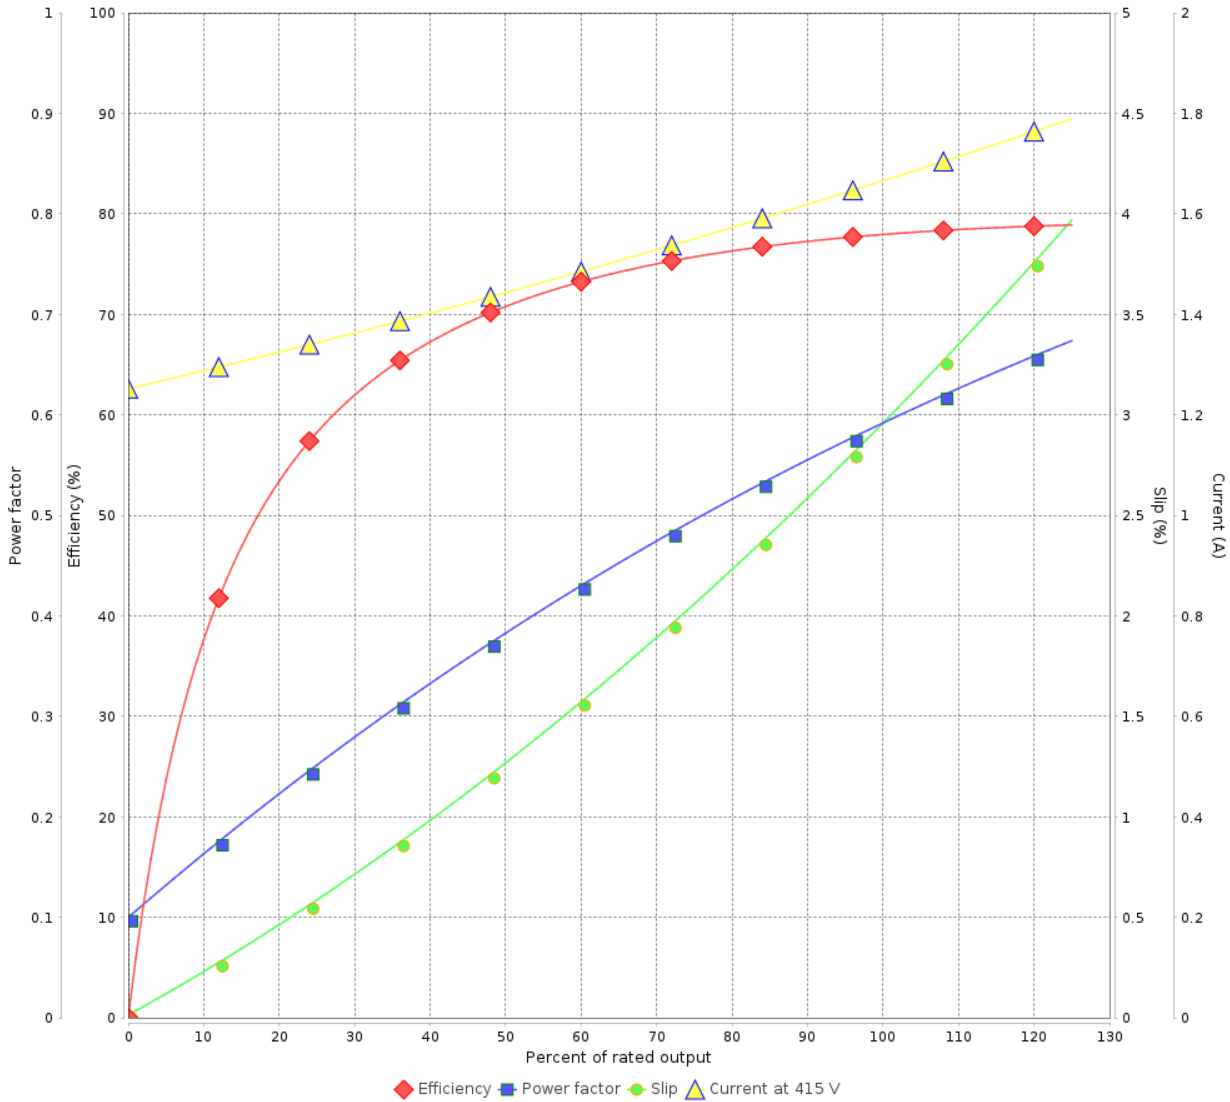

Performance : 415 V 50 Hz 6P IE3

Rated current	: 1.66 A	Moment of inertia (J)	: 0.0067 kgm <sup>2</sup>
LRC	: 6.3	Duty cycle	: Cont.(S1)
Rated torque	: 0.561 kgfm	Insulation class	: F
Locked rotor torque	: 320 %	Service factor	: 1.00
Breakdown torque	: 340 %	Temperature rise	: 80 K
Rated speed	: 970 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 6 / 9	Revision
Checked by				
Date	13/01/2024			

# LOAD PERFORMANCE CURVE


## Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase

Product code : 11432497

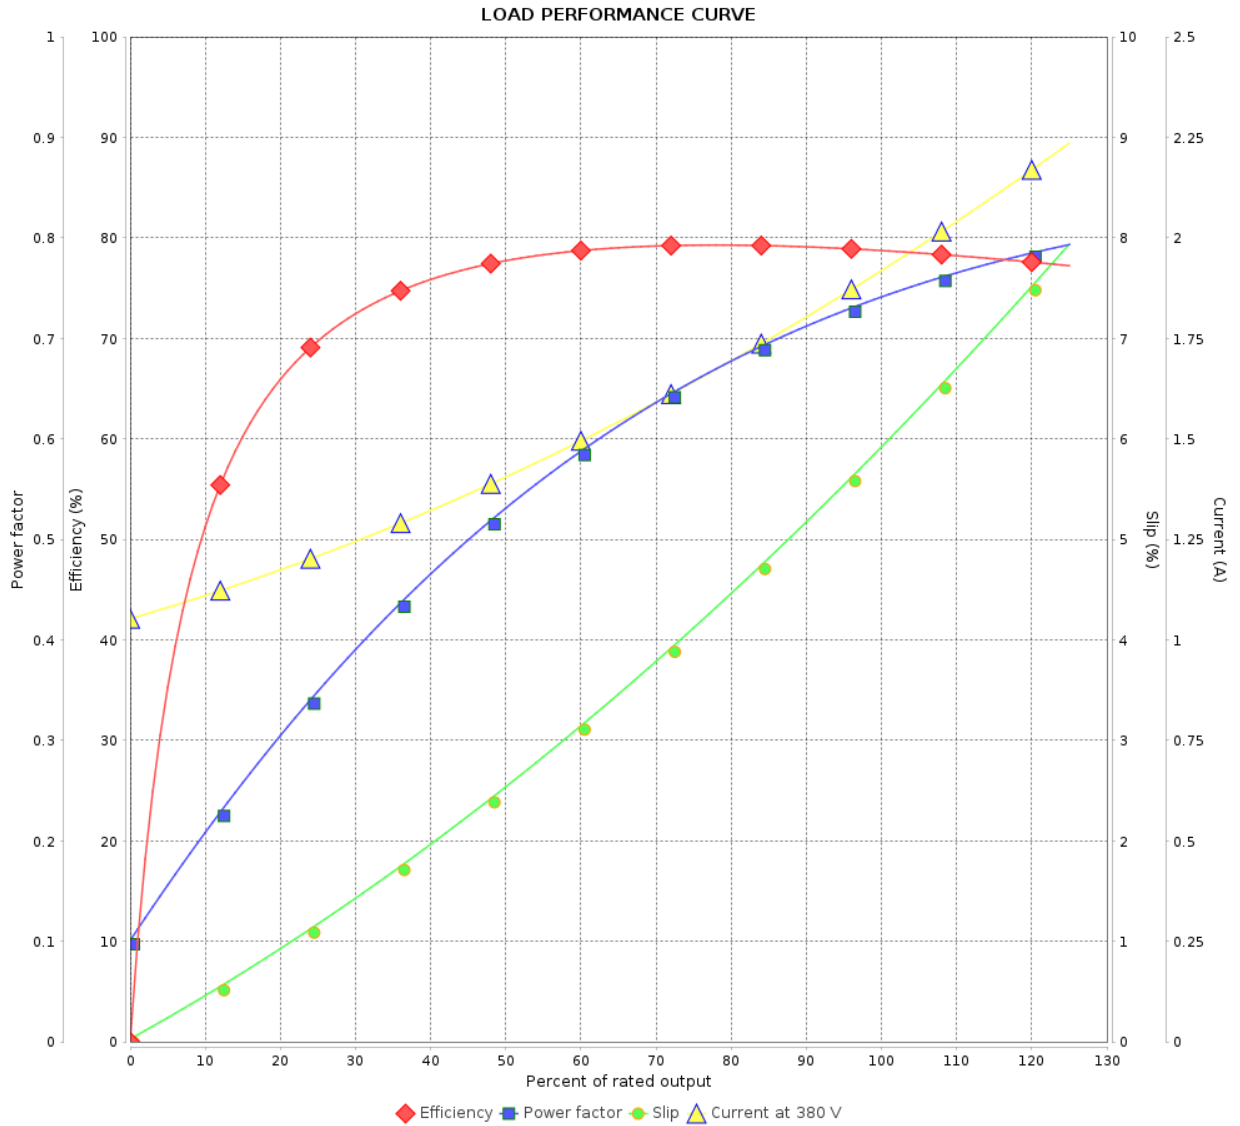

Performance : 380 V 50 Hz 6P IE2

Rated current : 1.96 A  
 LRC : 4.8  
 Rated torque : 0.772 kgfm  
 Locked rotor torque : 200 %  
 Breakdown torque : 220 %  
 Rated speed : 940 rpm

Moment of inertia (J) : 0.0067 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.00  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		7 / 9		
Date		13/01/2024		

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase      Product code : 11432497

LOAD PERFORMANCE CURVE

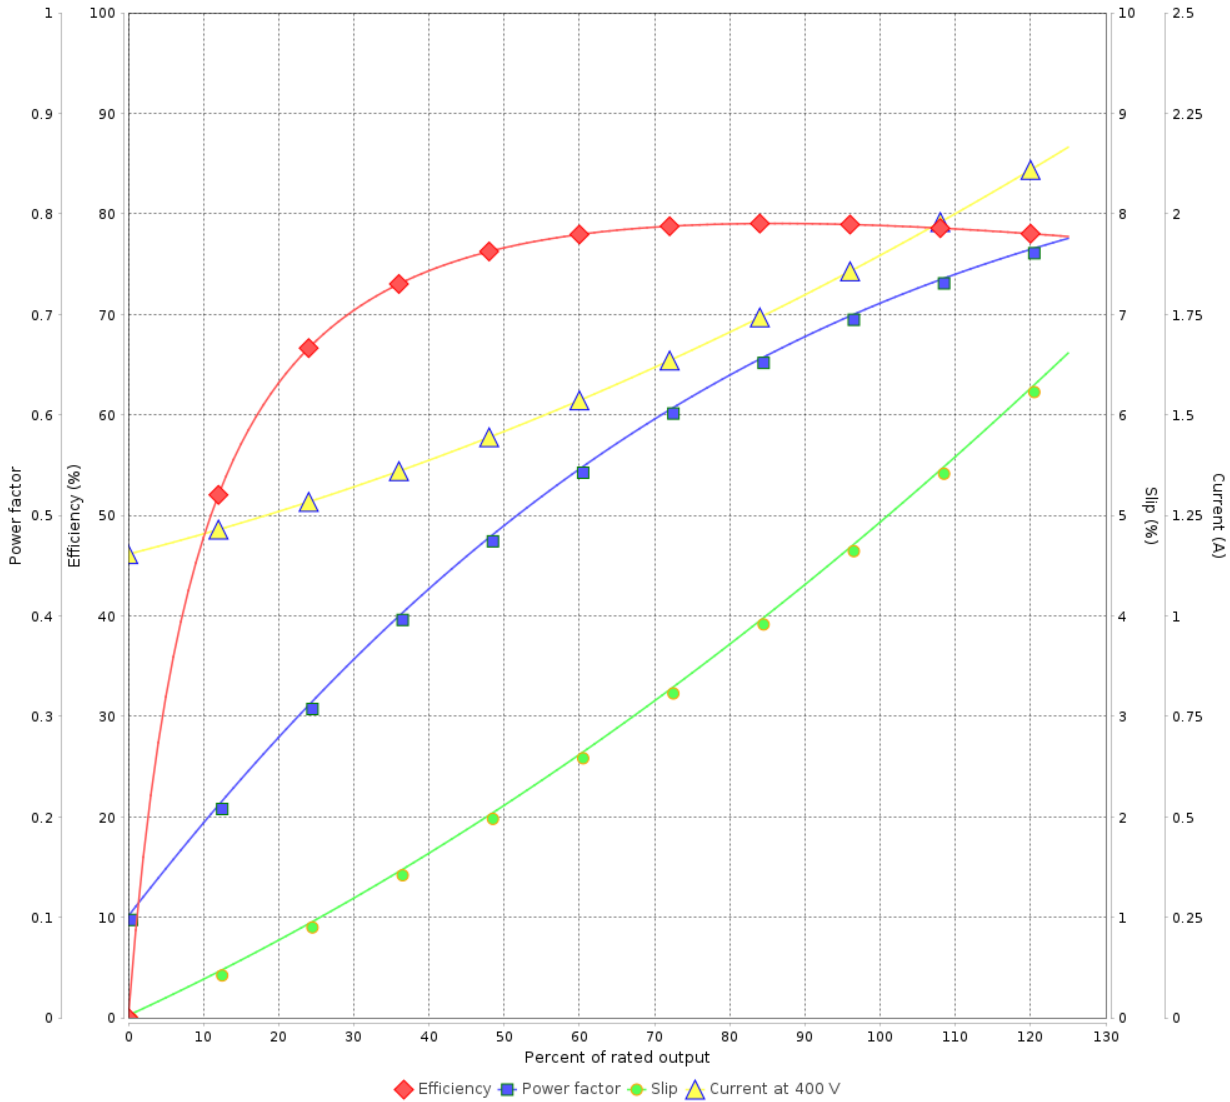

Performance : 400 V 50 Hz 6P IE2

Rated current	: 1.94 A	Moment of inertia (J)	: 0.0067 kgm <sup>2</sup>
LRC	: 5.2	Duty cycle	: Cont.(S1)
Rated torque	: 0.764 kgfm	Insulation class	: F
Locked rotor torque	: 229 %	Service factor	: 1.00
Breakdown torque	: 260 %	Temperature rise	: 80 K
Rated speed	: 950 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 8 / 9	Revision
Checked by				
Date	13/01/2024			




# LOAD PERFORMANCE CURVE

## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase      Product code : 11432497

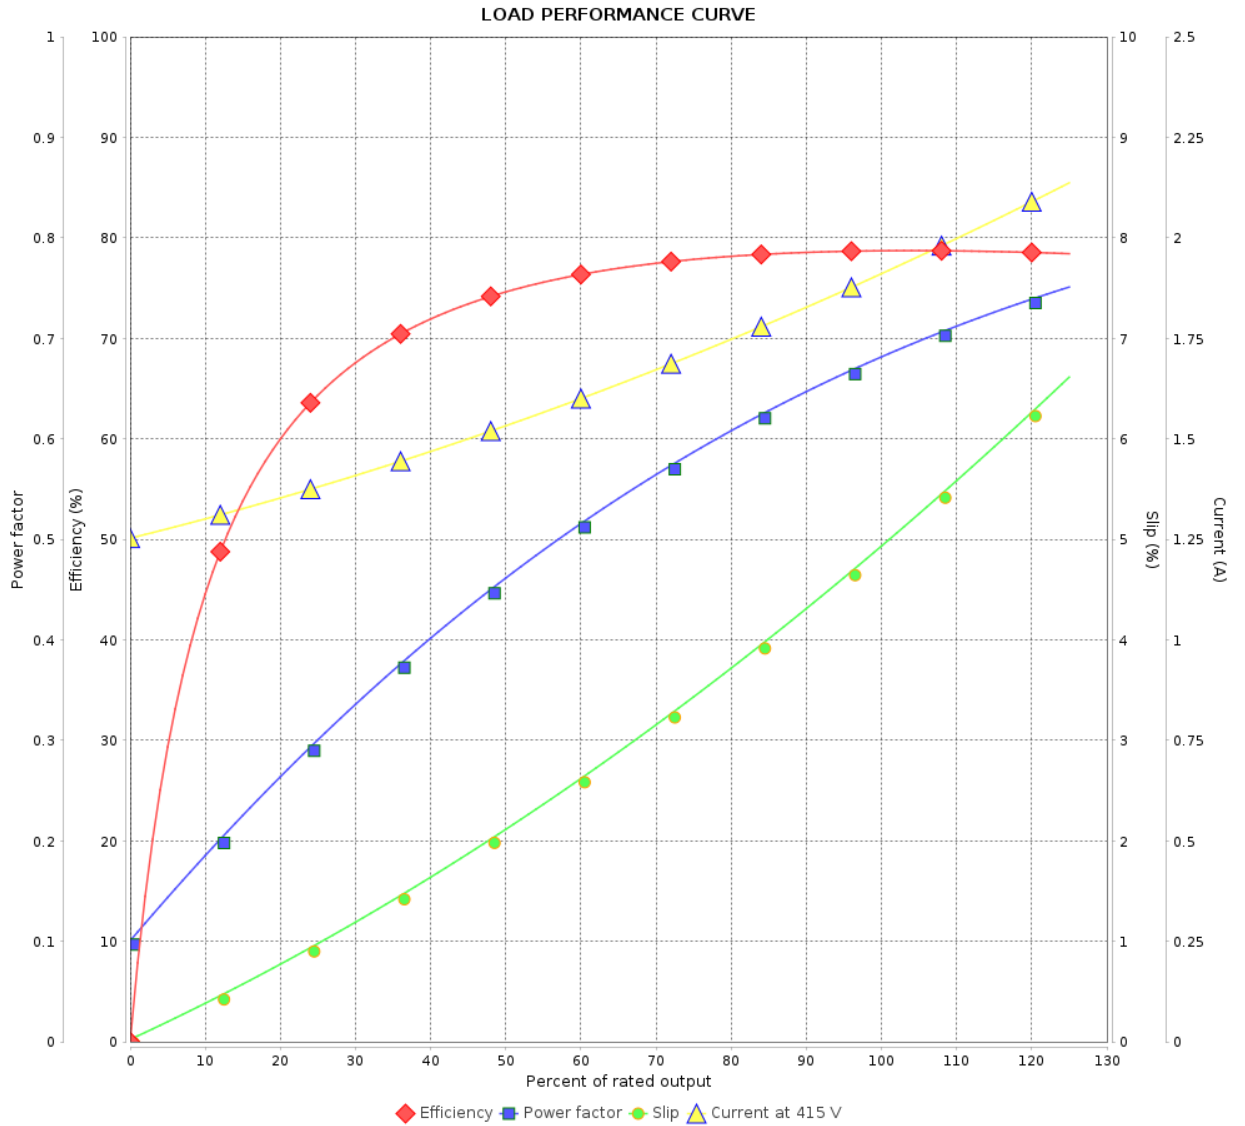

Performance : 415 V 50 Hz 6P IE2

Rated current : 1.95 A  
 LRC : 5.5  
 Rated torque : 0.764 kgfm  
 Locked rotor torque : 250 %  
 Breakdown torque : 280 %  
 Rated speed : 950 rpm

Moment of inertia (J) : 0.0067 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.00  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 9 / 9	Revision
Checked by				
Date	13/01/2024			