

# DATA SHEET



## Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase      Product code : 11441768

Frame	: 213/5T	Cooling method	: IC411 - TEFC
Insulation class	: F	Mounting	: F-1
Duty cycle	: Cont.(S1)	Rotation <sup>1</sup>	: Both (CW and CCW)
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line
Altitude	: 1000 m.a.s.l.	Approx. weight <sup>2</sup>	: 73.3 kg
Protection degree	: IP55	Moment of inertia (J)	: 0.0268 kgm <sup>2</sup>
Design	: B		

Output [HP]	10	7.5	7.5	7.5	10	10	10
Poles	2	2	2	2	2	2	2
Frequency [Hz]	60	50	50	50	50	50	50
Rated voltage [V]	230/460	380	400	415	380	400	415
Rated current [A]	23.2/11.6	10.4	10.1	9.91	14.1	13.4	13.1
L. R. Amperes [A]	167/83.5	82.2	87.9	90.2	79.0	85.8	90.4
LRC [A]	7.2x(Code H)	7.9x(Code J)	8.7x(Code K)	9.1x(Code K)	5.6x(Code F)	6.4x(Code G)	6.9x(Code H)
No load current [A]	7.20/3.60	3.50	3.70	3.90	3.50	3.70	3.90
Rated speed [RPM]	3530	2940	2945	2950	2900	2915	2925
Slip [%]	1.94	2.00	1.83	1.67	3.33	2.83	2.50
Rated torque [kgfm]	2.06	1.85	1.85	1.85	2.50	2.49	2.48
Locked rotor torque [%]	220	240	270	290	170	200	220
Breakdown torque [%]	290	300	340	360	220	250	270
Service factor	1.25	1.25	1.25	1.25	1.00	1.00	1.00
Temperature rise	80 K	80 K	80 K	80 K	105 K	105 K	105 K
Locked rotor time	32s (cold) 18s (hot)	32s (cold) 18s (hot)	32s (cold) 18s (hot)	32s (cold) 18s (hot)	21s (cold) 12s (hot)	21s (cold) 12s (hot)	21s (cold) 12s (hot)
Noise level <sup>2</sup>	68.0 dB(A)	63.0 dB(A)	63.0 dB(A)	63.0 dB(A)	63.0 dB(A)	63.0 dB(A)	63.0 dB(A)
Efficiency (%)	25%						
	50%	89.5	88.6	88.4	87.7	89.5	89.5
	75%	90.2	89.6	89.6	89.5	89.5	89.5
	100%	90.2	89.5	89.5	89.8	88.5	88.5
Power Factor	25%						
	50%	0.79	0.75	0.72	0.70	0.83	0.81
	75%	0.87	0.86	0.83	0.82	0.90	0.88
	100%	0.90	0.90	0.88	0.86	0.91	0.91

Losses at normative operating points (speed;torque), in percentage of rated output power

Losses (%)	P1 (0,9;1,0)	10.7	10.7	10.7	10.7	10.7	10.7
	P2 (0,5;1,0)	8.7	8.7	8.7	8.7	8.7	8.7
	P3 (0,25;1,0)	7.8	7.8	7.8	7.8	7.8	7.8
	P4 (0,9;0,5)	5.2	5.2	5.2	5.2	5.2	5.2
	P5 (0,5;0,5)	3.3	3.3	3.3	3.3	3.3	3.3
	P6 (0,5;0,25)	2.1	2.1	2.1	2.1	2.1	2.1
	P7 (0,25;0,25)	1.3	1.3	1.3	1.3	1.3	1.3

Bearing type	: Drive end	6308 ZZ	Non drive end	6207 ZZ	Foundation loads	Max. traction	: 87 kgf
	: Sealing	V'Ring	V'Ring	Max. compression		: 160 kgf	
	: Lubrication interval	-	-				
	: Lubricant amount	-	-				
	: Lubricant type	Mobil Polyrex EM					

This revision replaces and cancel the previous one, which must be eliminated.

(1) Looking the motor from the shaft end.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary			Performed	Checked	Date
Performed by						
Checked by					Page	Revision
Date	01/02/2024				1 / 9	

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Notes  
USABLE @208V 25.7A SF 1.15 SFA 29.5A

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	01/02/2024		2 / 9	

# LOAD PERFORMANCE CURVE


## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11441768

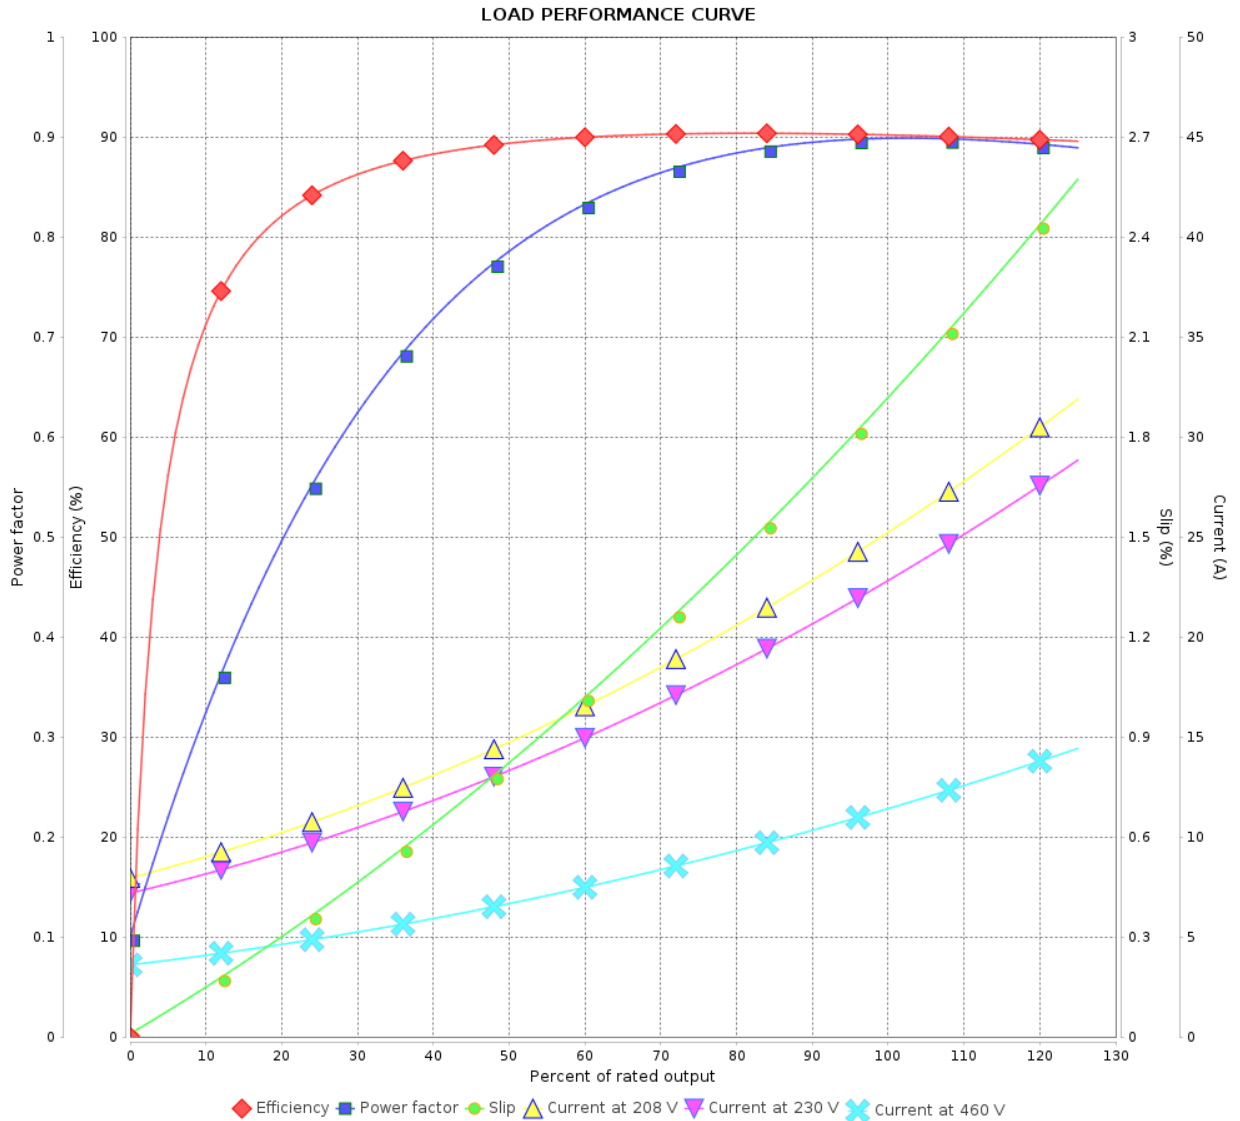

Performance : 230/460 V 60 Hz 2P

Rated current : 23.2/11.6 A  
 LRC : 7.2  
 Rated torque : 2.06 kgfm  
 Locked rotor torque : 220 %  
 Breakdown torque : 290 %  
 Rated speed : 3530 rpm

Moment of inertia (J) : 0.0268 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.25  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		3 / 9		
Date		01/02/2024		

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11441768

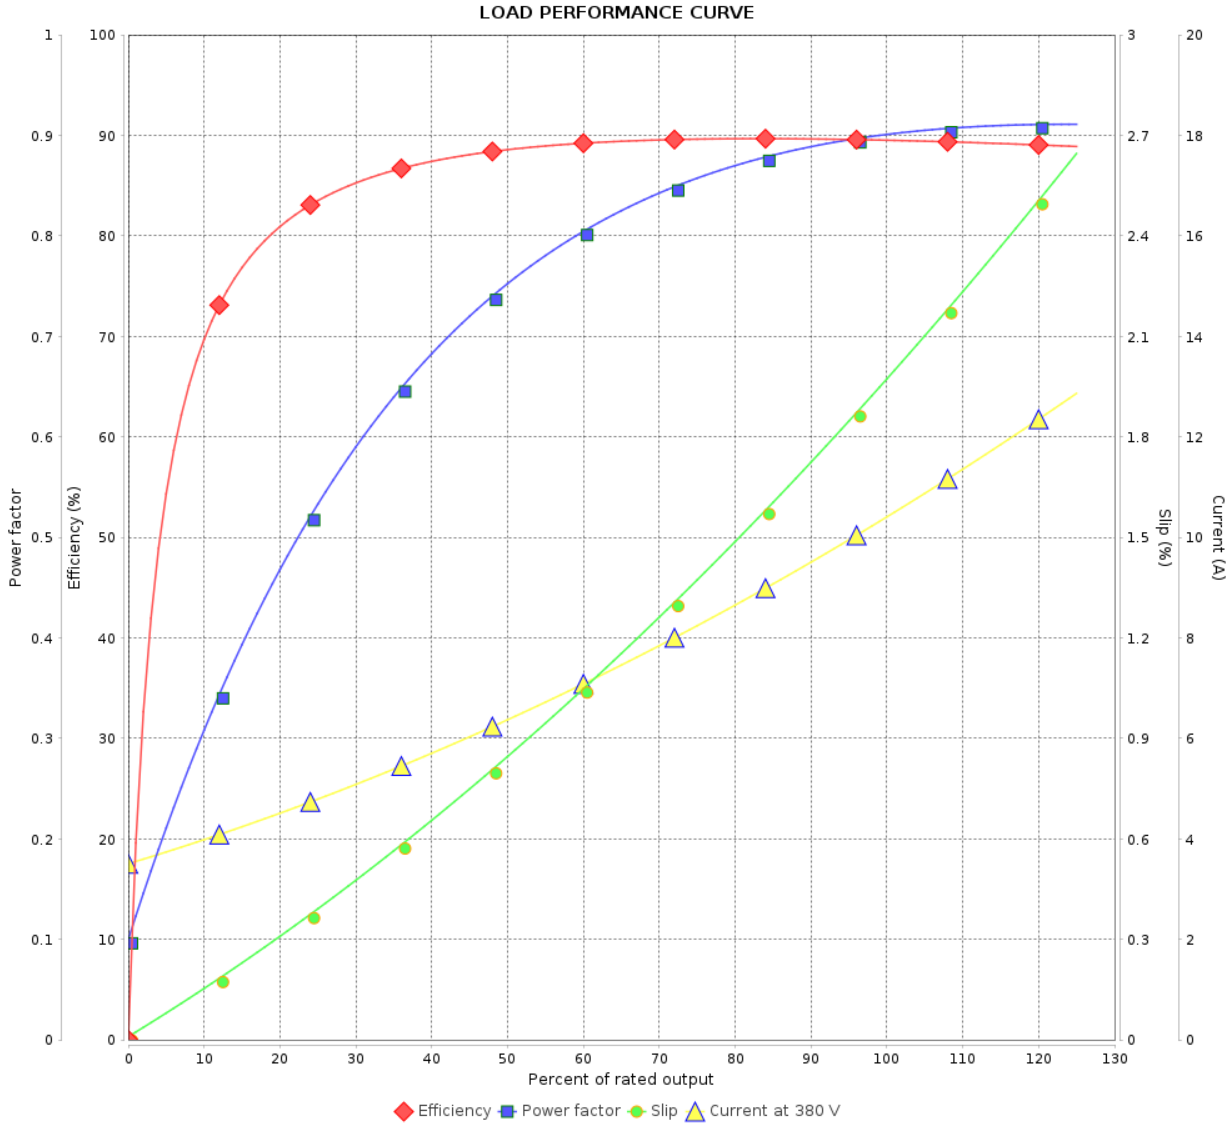

Performance : 380 V 50 Hz 2P IE3

Rated current : 10.4 A  
 LRC : 7.9  
 Rated torque : 1.85 kgfm  
 Locked rotor torque : 240 %  
 Breakdown torque : 300 %  
 Rated speed : 2940 rpm

Moment of inertia (J) : 0.0268 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.25  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

# LOAD PERFORMANCE CURVE


## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11441768

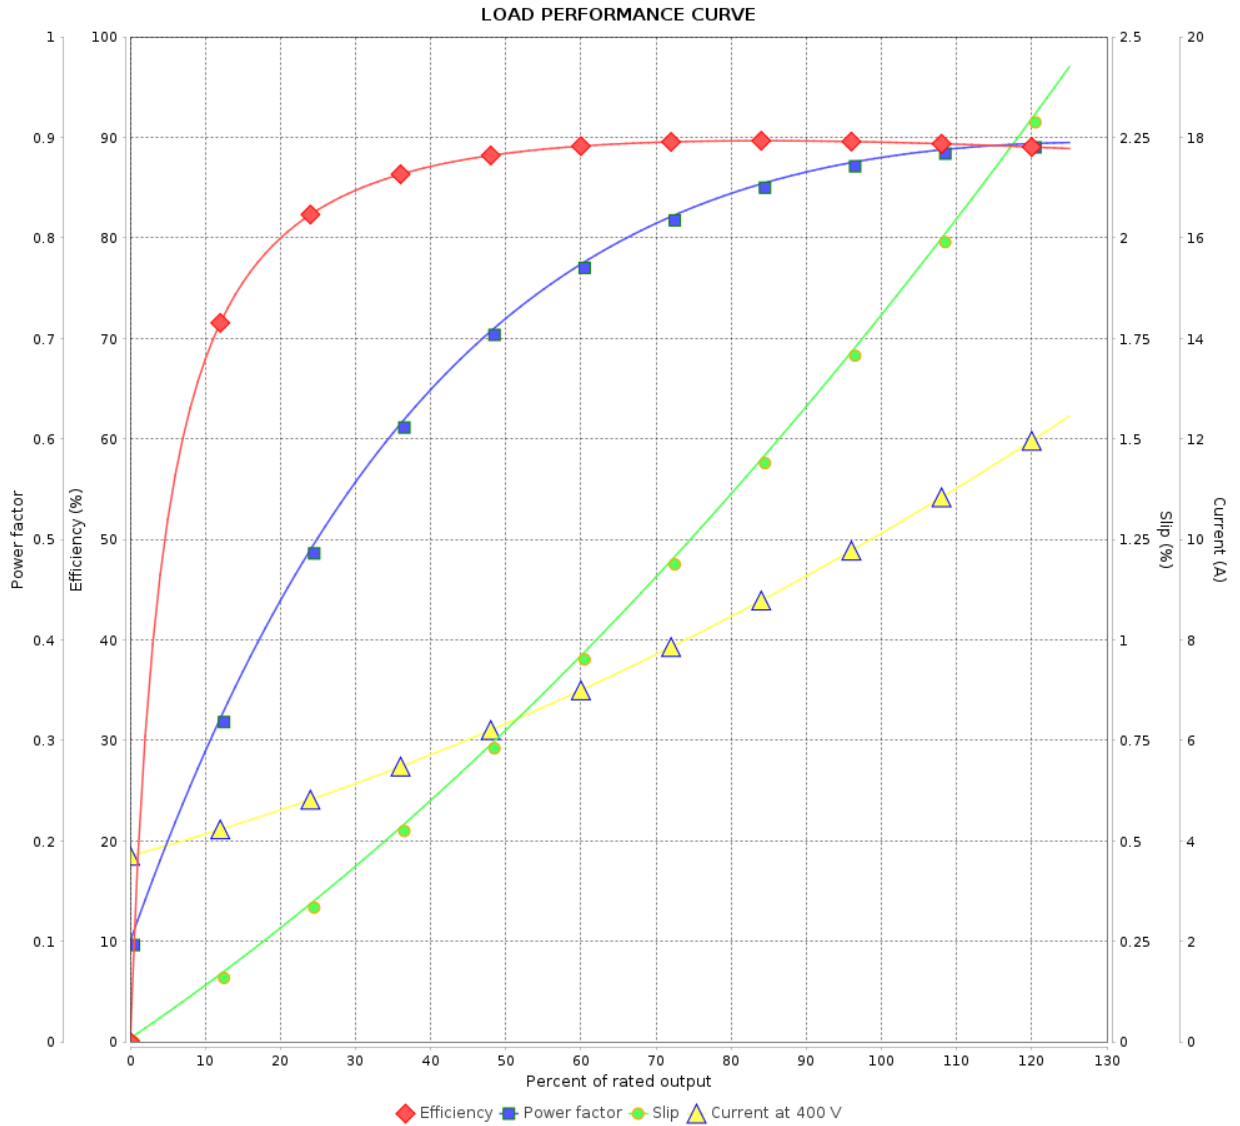

Performance : 400 V 50 Hz 2P IE3

Rated current : 10.1 A  
 LRC : 8.7  
 Rated torque : 1.85 kgfm  
 Locked rotor torque : 270 %  
 Breakdown torque : 340 %  
 Rated speed : 2945 rpm

Moment of inertia (J) : 0.0268 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.25  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				
			5 / 9	

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11441768

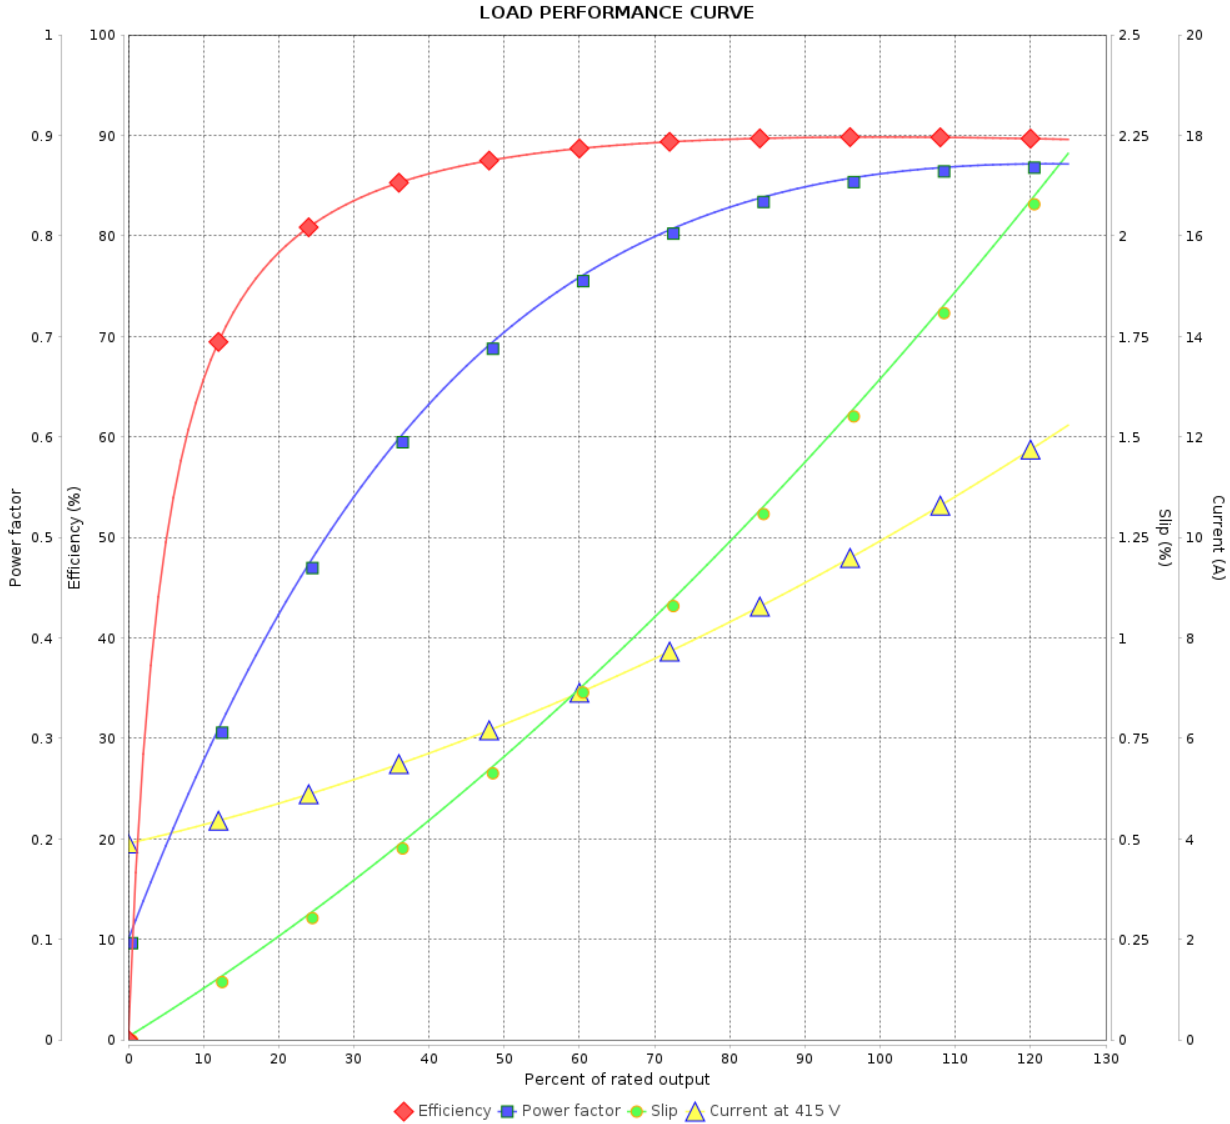

Performance : 415 V 50 Hz 2P IE3

Rated current : 9.91 A  
 LRC : 9.1  
 Rated torque : 1.85 kgfm  
 Locked rotor torque : 290 %  
 Breakdown torque : 360 %  
 Rated speed : 2950 rpm

Moment of inertia (J) : 0.0268 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.25  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date				
		Page	Revision	
		6 / 9		

# LOAD PERFORMANCE CURVE


## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11441768

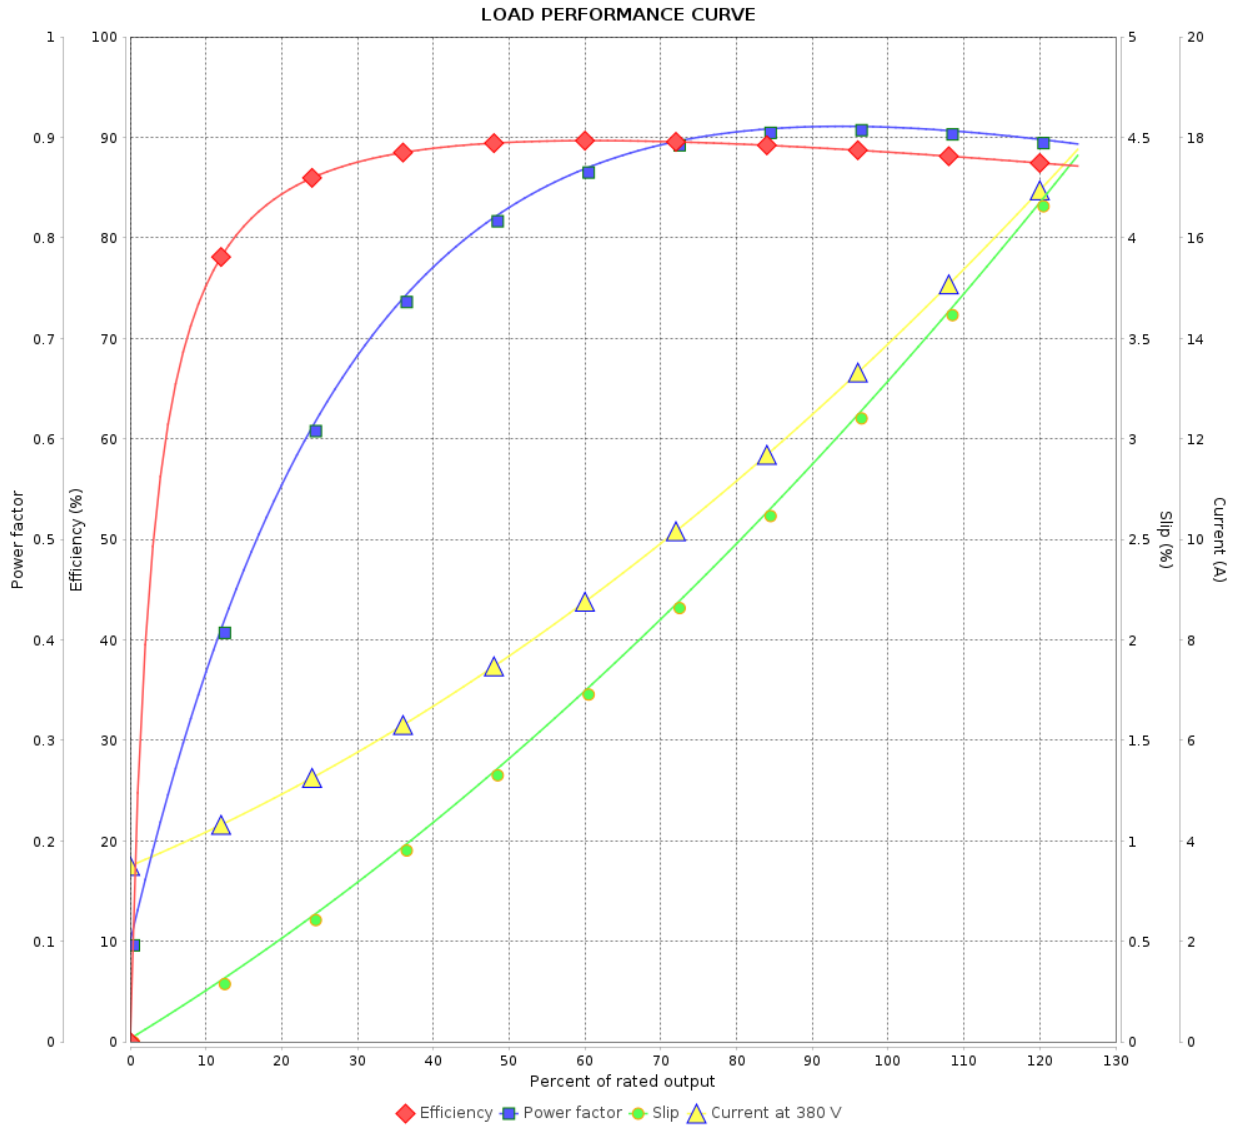

Performance : 380 V 50 Hz 2P IE2

Rated current : 14.1 A  
 LRC : 5.6  
 Rated torque : 2.50 kgfm  
 Locked rotor torque : 170 %  
 Breakdown torque : 220 %  
 Rated speed : 2900 rpm

Moment of inertia (J) : 0.0268 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.00  
 Temperature rise : 105 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		7 / 9		
Date		01/02/2024		

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11441768

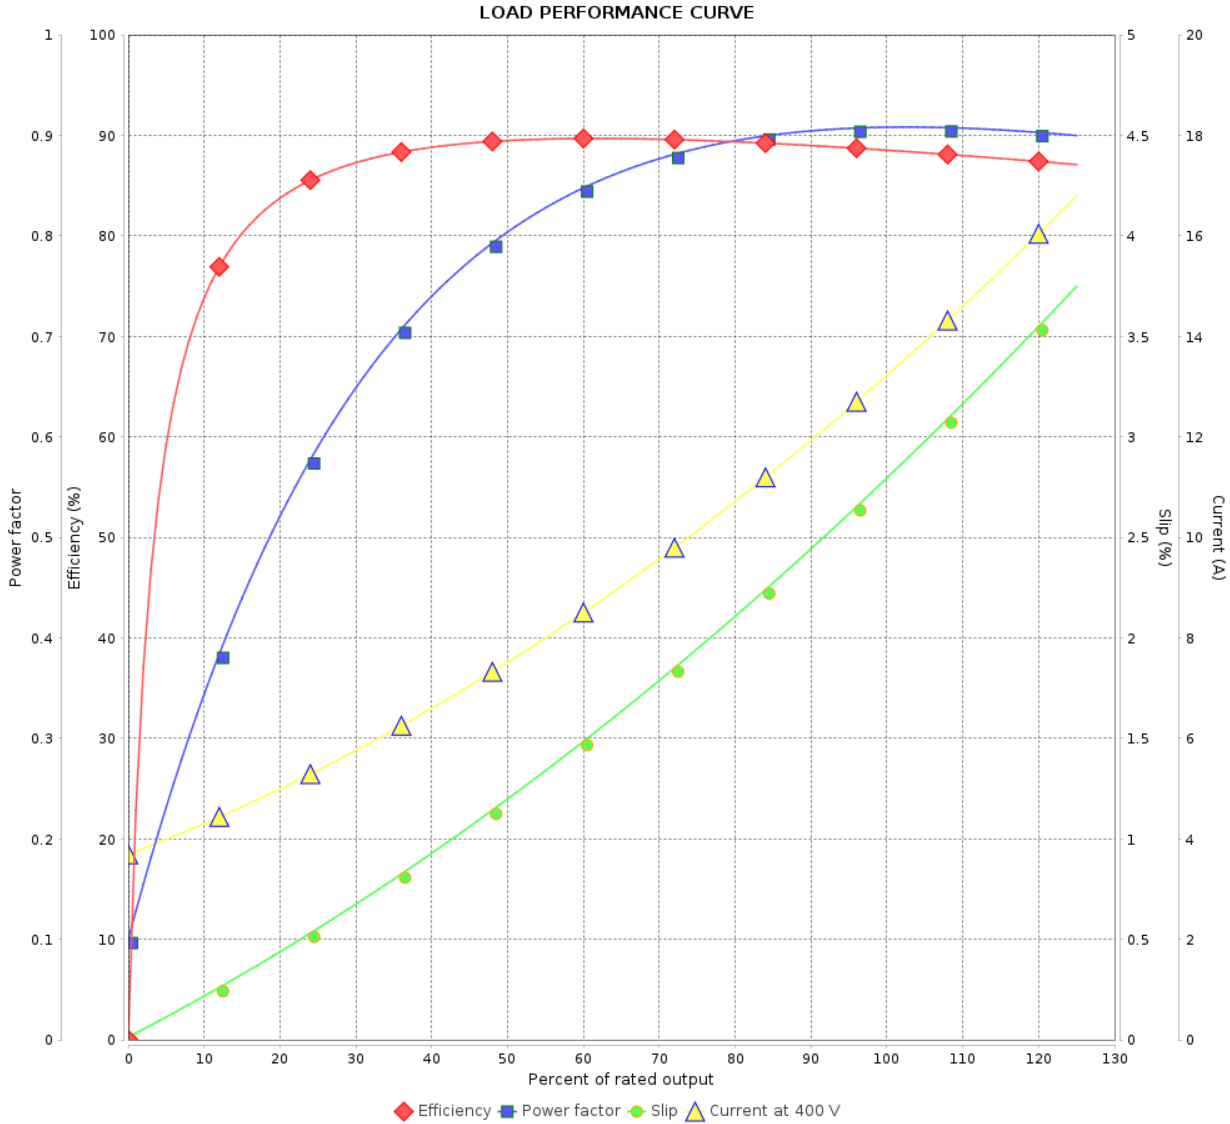

Performance : 400 V 50 Hz 2P IE2

Rated current	: 13.4 A	Moment of inertia (J)	: 0.0268 kgm <sup>2</sup>
LRC	: 6.4	Duty cycle	: Cont.(S1)
Rated torque	: 2.49 kgfm	Insulation class	: F
Locked rotor torque	: 200 %	Service factor	: 1.00
Breakdown torque	: 250 %	Temperature rise	: 105 K
Rated speed	: 2915 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 8 / 9	Revision
Checked by				
Date	01/02/2024			



# LOAD PERFORMANCE CURVE


## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11441768

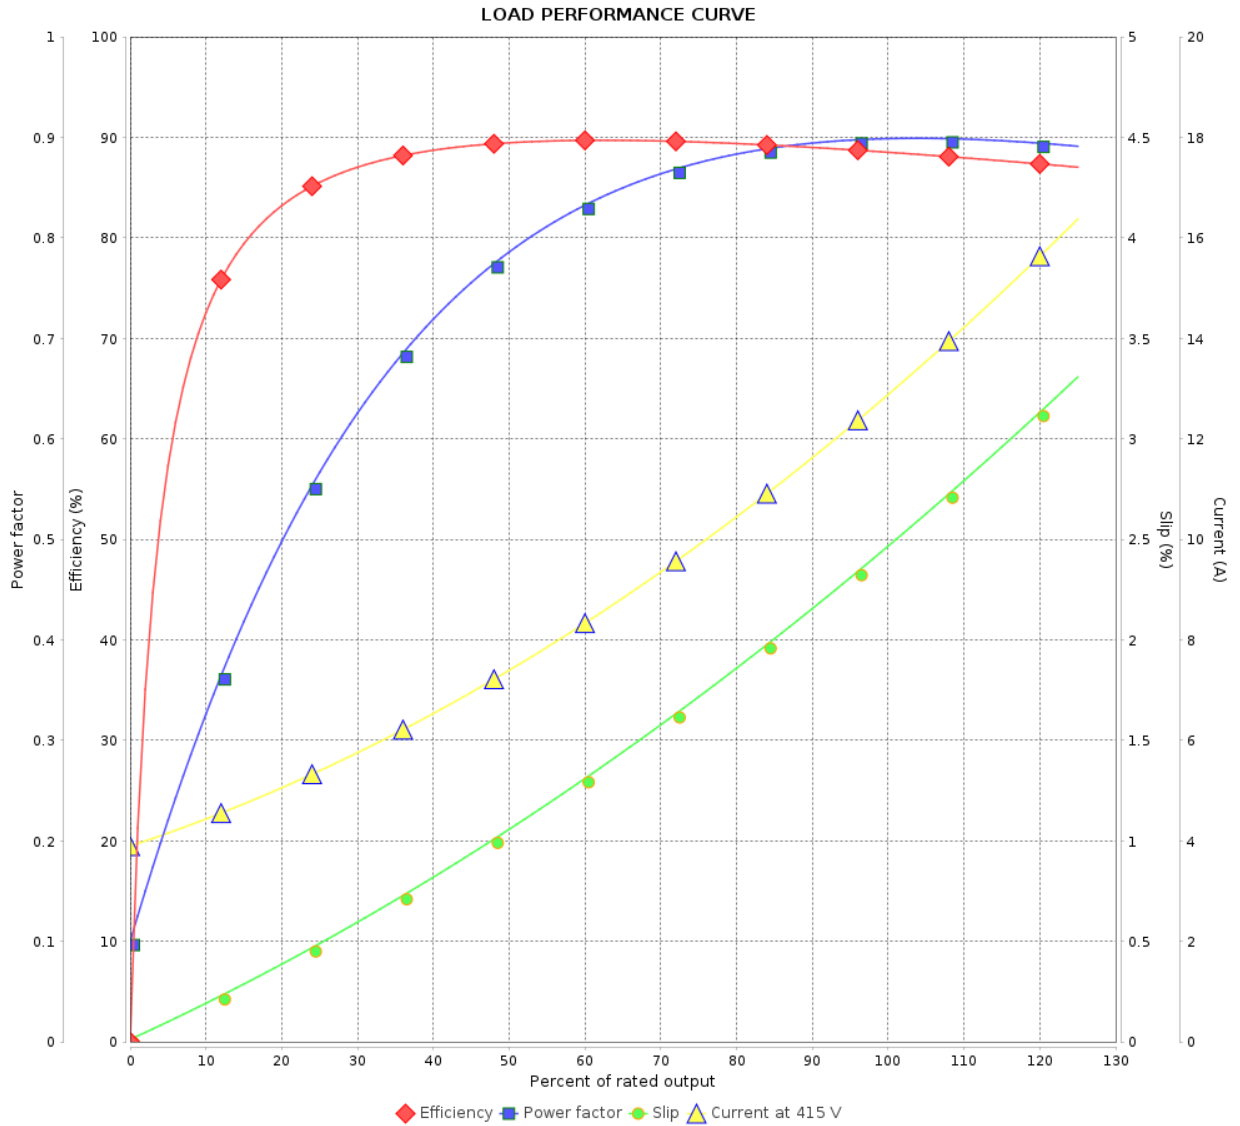

Performance : 415 V 50 Hz 2P IE2

Rated current : 13.1 A  
 LRC : 6.9  
 Rated torque : 2.48 kgfm  
 Locked rotor torque : 220 %  
 Breakdown torque : 270 %  
 Rated speed : 2925 rpm

Moment of inertia (J) : 0.0268 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.00  
 Temperature rise : 105 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				