

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :							
Product line	: W22 NEMA Premium Efficiency Three-Phase	Product code :	11457085				
Frame	: 284/6TC	Cooling method	: IC411 - TEFC				
Insulation class	: F	Mounting	: F-1				
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)				
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line				
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 202 kg				
Protection degree	: IP55	Moment of inertia (J)	: 0.2467 kgm ²				
Design	: B						
Output [HP]	30	25	25	25	30	30	30
Poles	4	4	4	4	4	4	4
Frequency [Hz]	60	50	50	50	50	50	50
Rated voltage [V]	230/460	380	400	415	380	400	415
Rated current [A]	70.2/35.1	35.7	34.3	33.9	43.1	41.1	39.7
L. R. Amperes [A]	428/214	214	230	247	228	247	238
LRC [A]	6.1x(Code G)	6.0x(Code G)	6.7x(Code H)	7.3x(Code J)	5.3x(Code F)	6.0x(Code G)	6.0x(Code G)
No load current [A]	24.6/12.3	12.2	13.1	13.8	12.2	13.1	13.8
Rated speed [RPM]	1770	1465	1470	1475	1455	1460	1465
Slip [%]	1.67	2.33	2.00	1.67	3.00	2.67	2.33
Rated torque [kgfm]	12.3	12.4	12.3	12.3	15.0	14.9	14.9
Locked rotor torque [%]	240	200	229	260	170	190	220
Breakdown torque [%]	240	229	260	280	200	220	240
Service factor	1.25	1.00	1.00	1.00	1.00	1.00	1.00
Temperature rise	80 K	80 K	80 K	80 K	105 K	105 K	105 K
Locked rotor time	36s (cold) 20s (hot)	27s (cold) 15s (hot)	27s (cold) 15s (hot)	27s (cold) 15s (hot)	23s (cold) 13s (hot)	23s (cold) 13s (hot)	21s (cold) 12s (hot)
Noise level ²	63.0 dB(A)	61.0 dB(A)	61.0 dB(A)	61.0 dB(A)	61.0 dB(A)	61.0 dB(A)	61.0 dB(A)
Efficiency (%)	25%	0.000			0.000		
	50%	93.0	92.1	92.1	91.6	90.0	91.2
	75%	93.0	92.5	92.8	92.5	90.2	91.7
	100%	93.6	92.6	92.7	92.6	90.2	91.7
Power Factor	25%	0.00			0.00		
	50%	0.70	0.70	0.67	0.64	0.76	0.70
	75%	0.80	0.81	0.79	0.76	0.83	0.80
	100%	0.84	0.85	0.84	0.82	0.86	0.84
Losses at normative operating points (speed;torque), in percentage of rated output power							
Losses (%)	P1 (0,9;1,0)	6.8	6.8	6.8	6.8	6.8	6.8
	P2 (0,5;1,0)	5.8	5.8	5.8	5.8	5.8	5.8
	P3 (0,25;1,0)	5.2	5.2	5.2	5.2	5.2	5.2
	P4 (0,9;0,5)	3.1	3.1	3.1	3.1	3.1	3.1
	P5 (0,5;0,5)	2.2	2.2	2.2	2.2	2.2	2.2
	P6 (0,5;0,25)	1.4	1.4	1.4	1.4	1.4	1.4
	P7 (0,25;0,25)	0.9	0.9	0.9	0.9	0.9	0.9
Bearing type	: Drive end 6311 C3	Non drive end 6211 C3	Foundation loads				
Sealing	: V'Ring	V'Ring	Max. traction	: 409 kgf			
Lubrication interval	: 20000 h	20000 h	Max. compression	: 611 kgf			
Lubricant amount	: 18 g	11 g					
Lubricant type	: Mobil Polyrex EM						
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end.				These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.			
Rev.	Changes Summary			Performed	Checked	Date	
Performed by							
Checked by					Page	Revision	
Date	18/03/2024				1 / 9		

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Notes
USABLE @208V 77.6A SF 1.15 SFA 89.3A

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	18/03/2024		2 / 9	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11457085

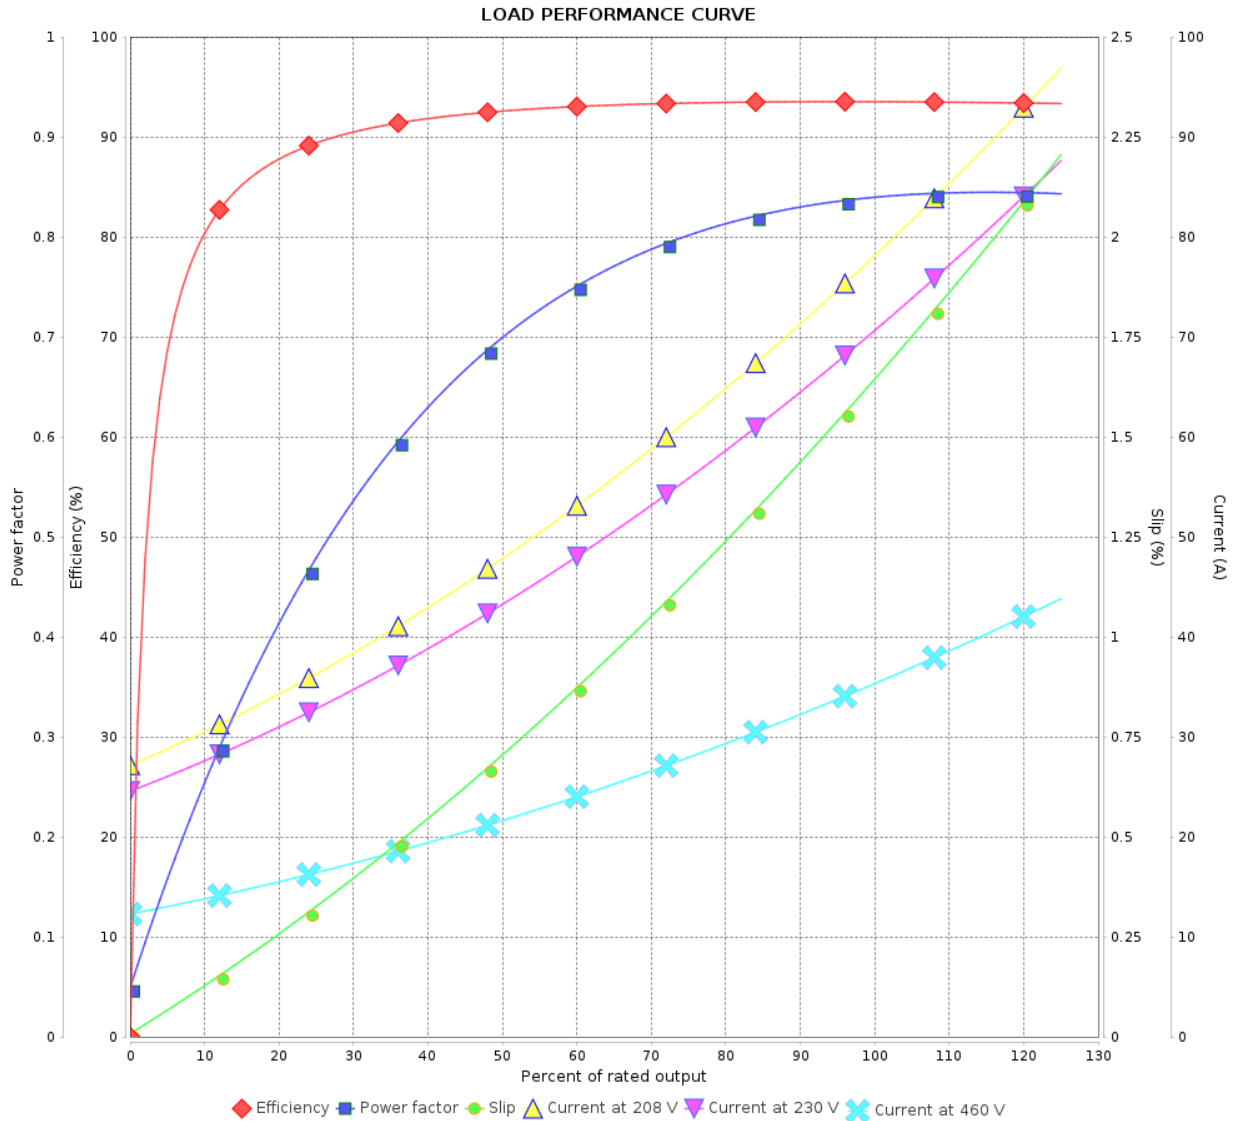

Performance : 230/460 V 60 Hz 4P

Rated current : 70.2/35.1 A
 LRC : 6.1
 Rated torque : 12.3 kgfm
 Locked rotor torque : 240 %
 Breakdown torque : 240 %
 Rated speed : 1770 rpm

Moment of inertia (J) : 0.2467 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.25
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		3 / 9		
Date		18/03/2024		

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11457085

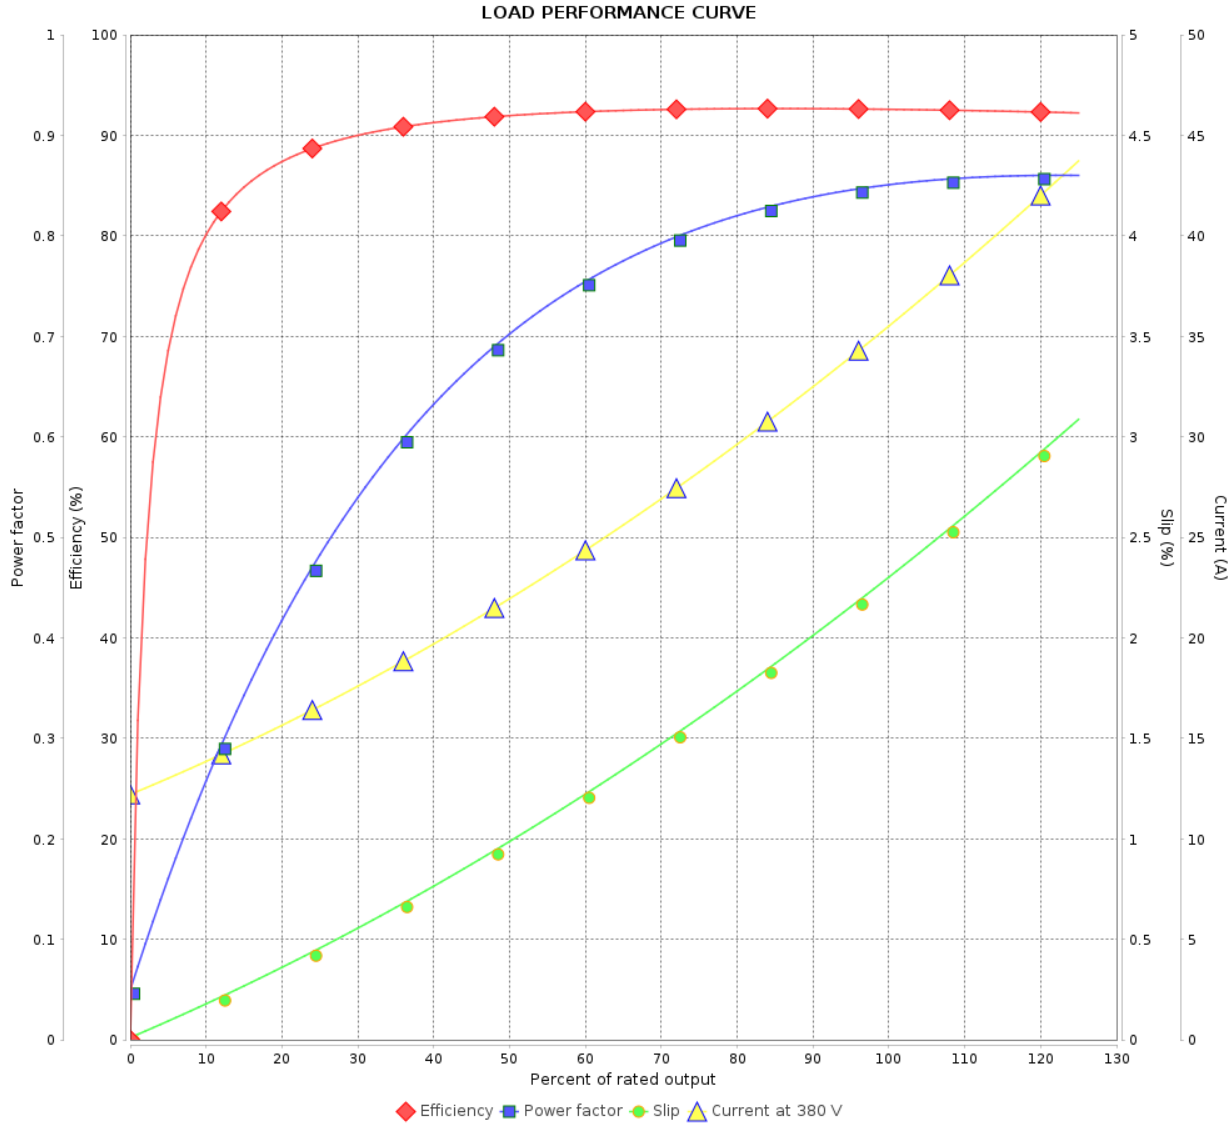

Performance : 380 V 50 Hz 4P IE3

Rated current : 35.7 A
 LRC : 6.0
 Rated torque : 12.4 kgfm
 Locked rotor torque : 200 %
 Breakdown torque : 229 %
 Rated speed : 1465 rpm

Moment of inertia (J) : 0.2467 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11457085

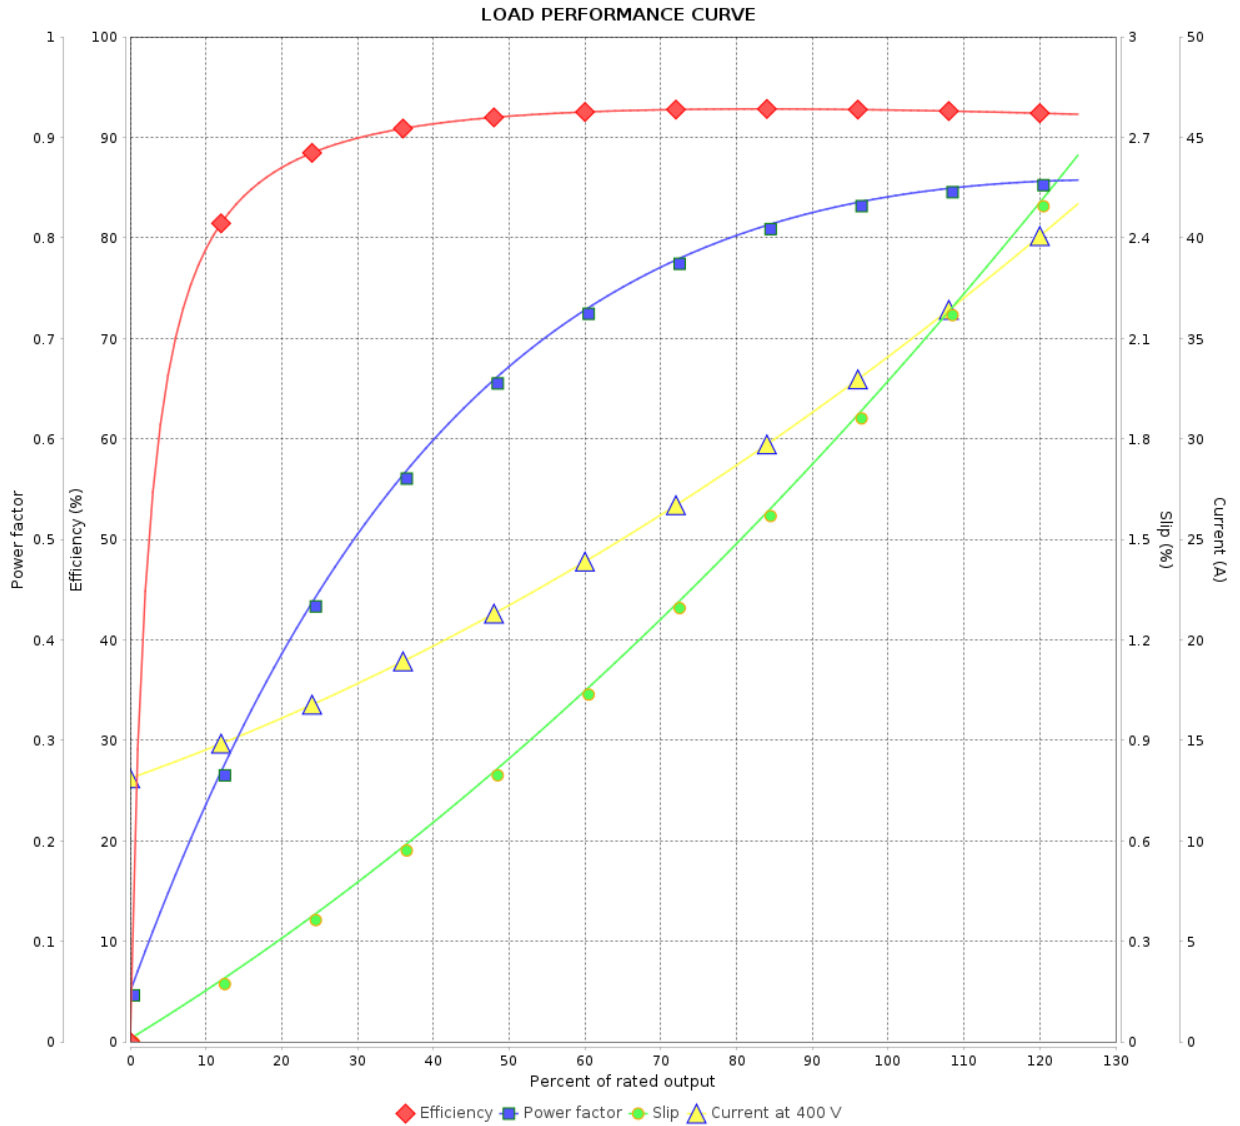

Performance : 400 V 50 Hz 4P IE3

Rated current : 34.3 A
 LRC : 6.7
 Rated torque : 12.3 kgfm
 Locked rotor torque : 229 %
 Breakdown torque : 260 %
 Rated speed : 1470 rpm

Moment of inertia (J) : 0.2467 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		5 / 9		
Date		18/03/2024		

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11457085

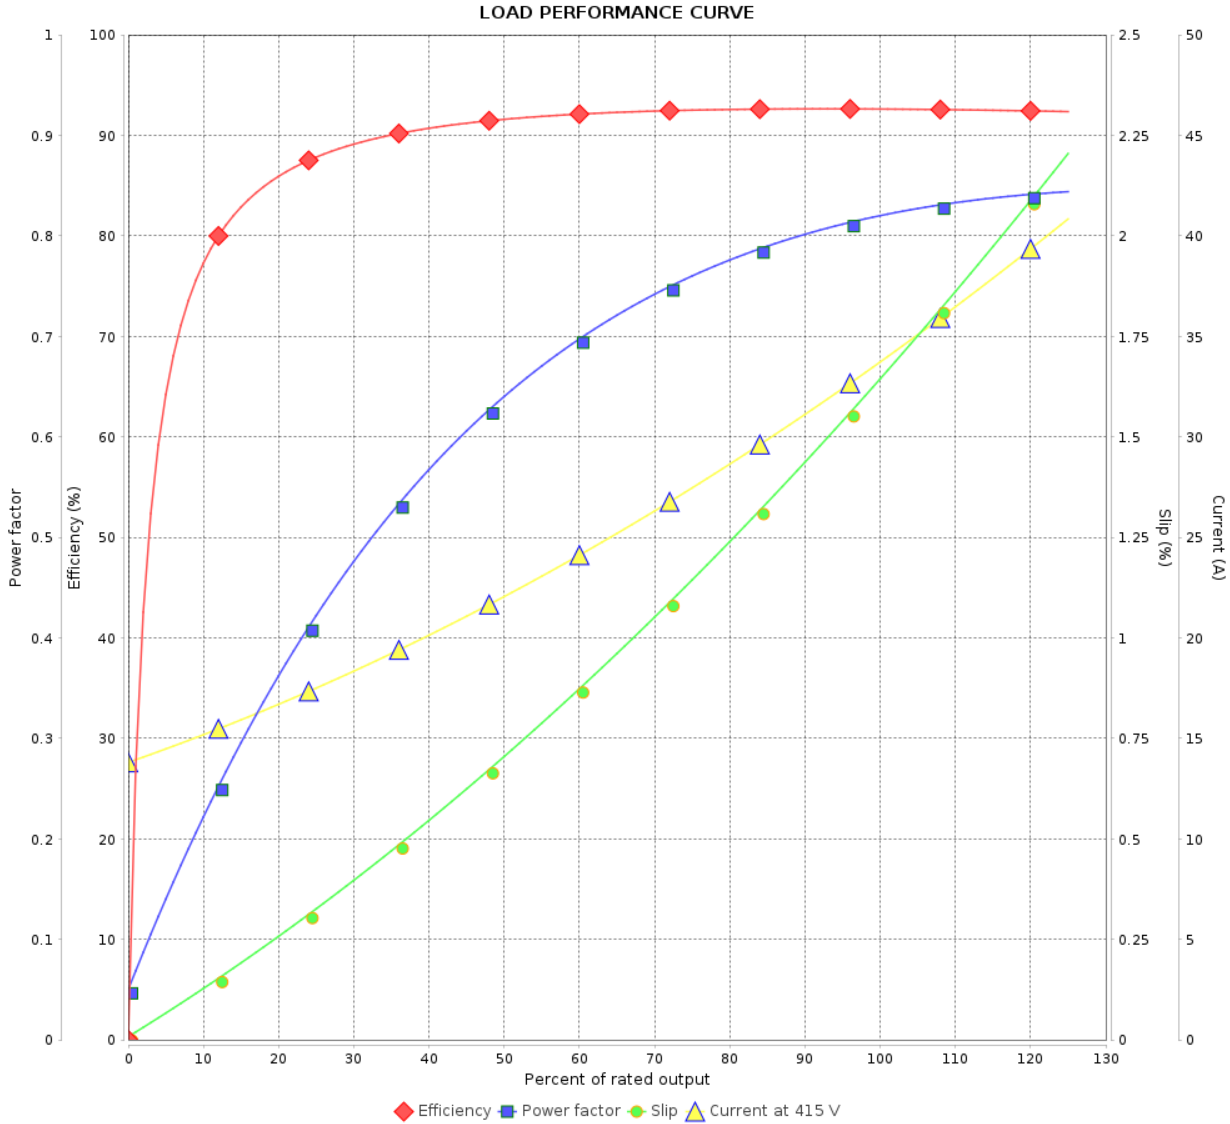

Performance : 415 V 50 Hz 4P IE3

Rated current : 33.9 A
 LRC : 7.3
 Rated torque : 12.3 kgfm
 Locked rotor torque : 260 %
 Breakdown torque : 280 %
 Rated speed : 1475 rpm

Moment of inertia (J) : 0.2467 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 6 / 9	Revision
Checked by				
Date	18/03/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11457085

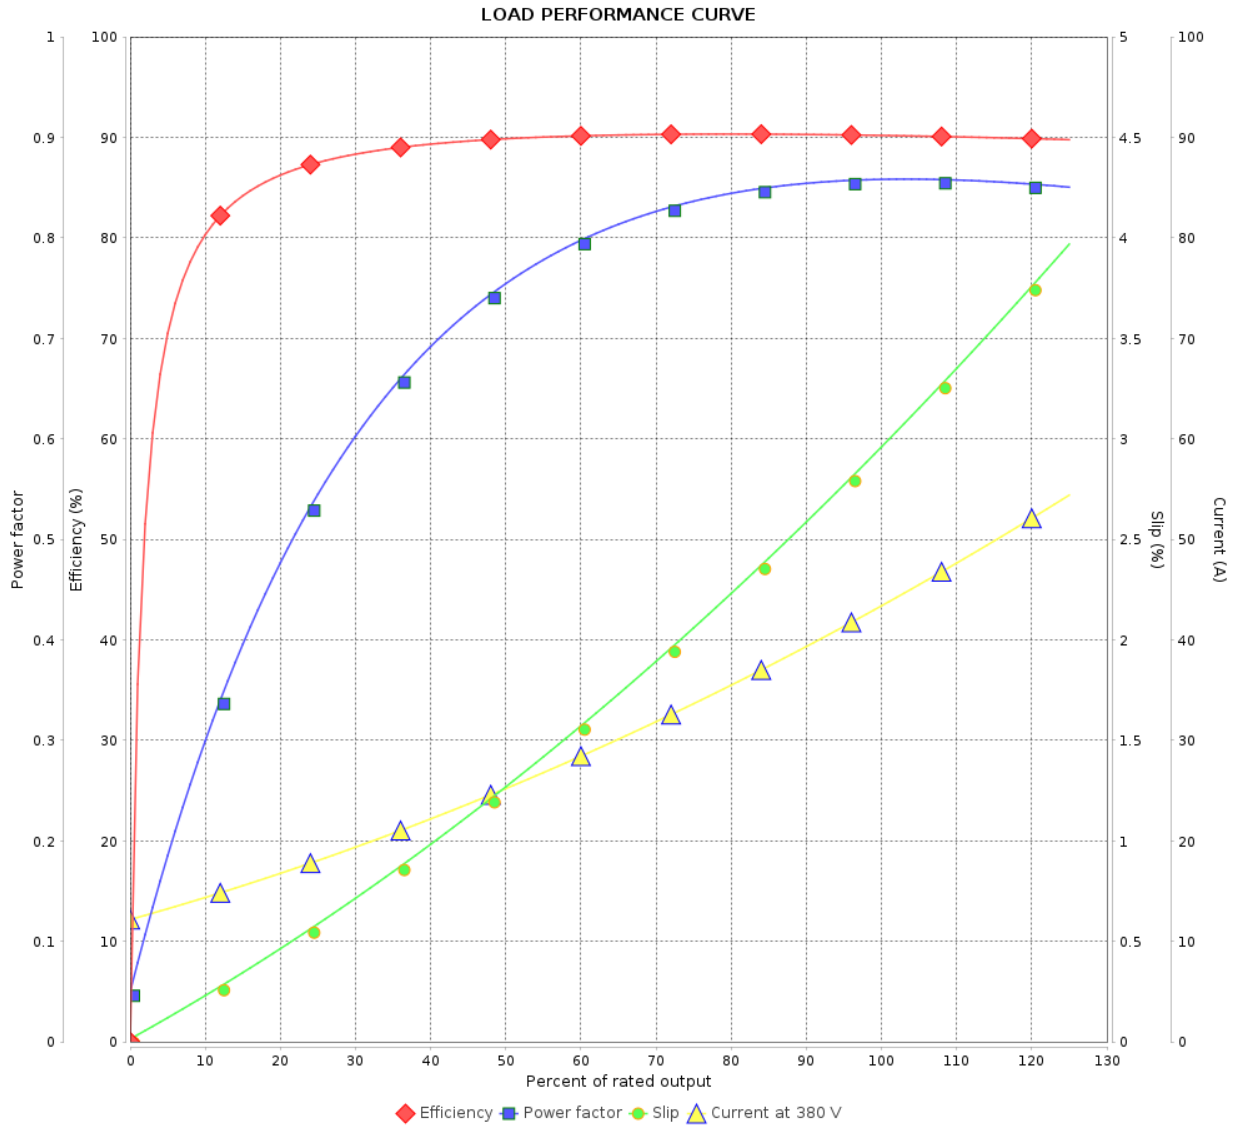

Performance : 380 V 50 Hz 4P IE1

Rated current : 43.1 A
 LRC : 5.3
 Rated torque : 15.0 kgfm
 Locked rotor torque : 170 %
 Breakdown torque : 200 %
 Rated speed : 1455 rpm

Moment of inertia (J) : 0.2467 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 105 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 7 / 9	Revision
Checked by				
Date	18/03/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11457085

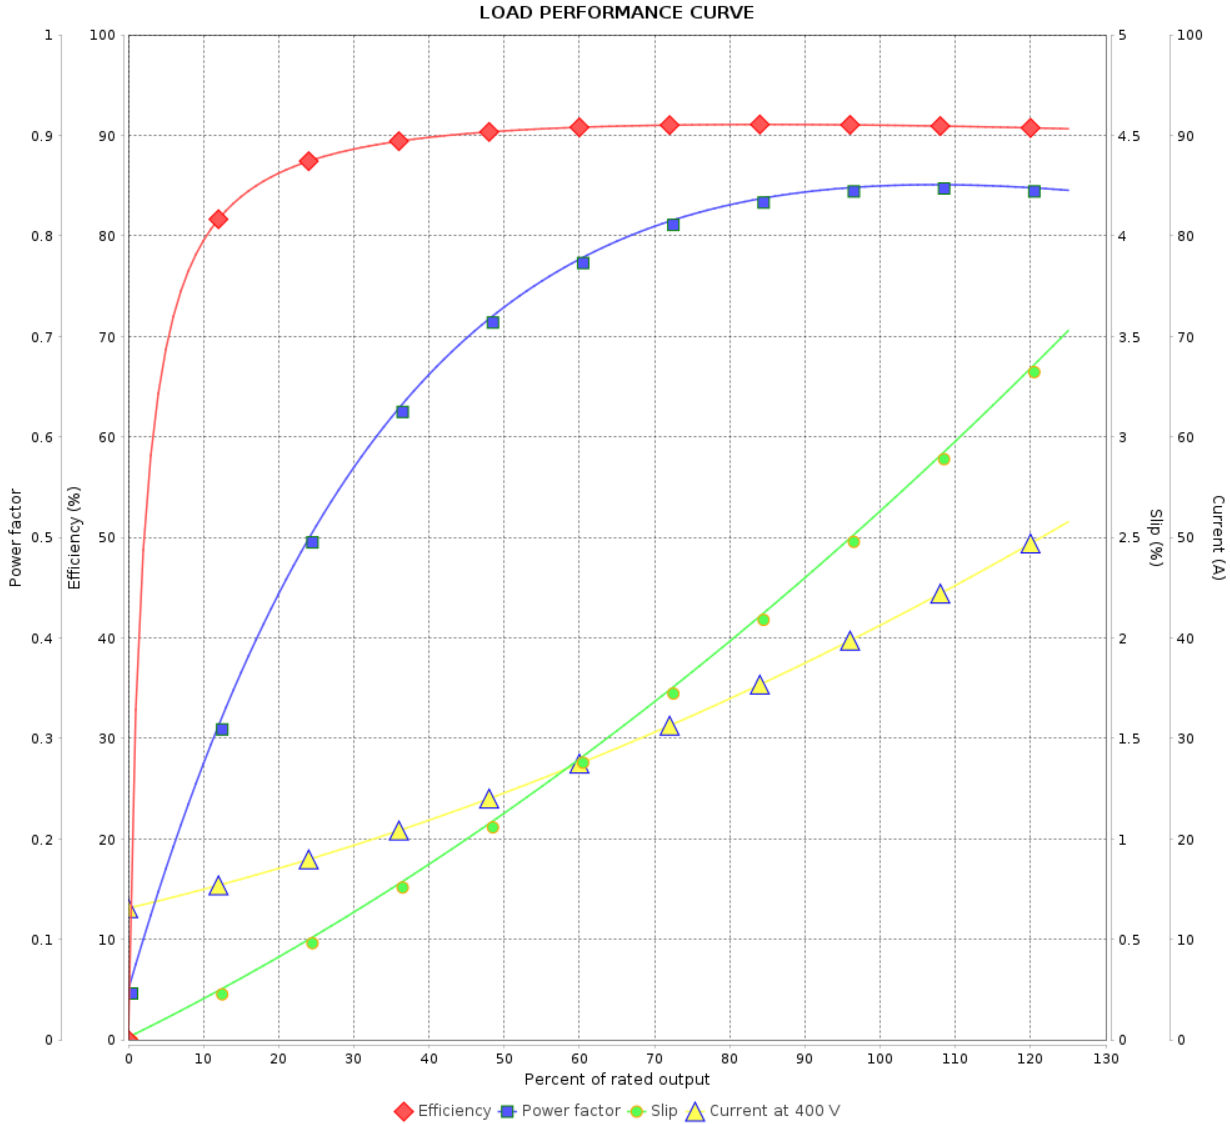

Performance : 400 V 50 Hz 4P IE1

Rated current : 41.1 A
 LRC : 6.0
 Rated torque : 14.9 kgfm
 Locked rotor torque : 190 %
 Breakdown torque : 220 %
 Rated speed : 1460 rpm

Moment of inertia (J) : 0.2467 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 105 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11457085

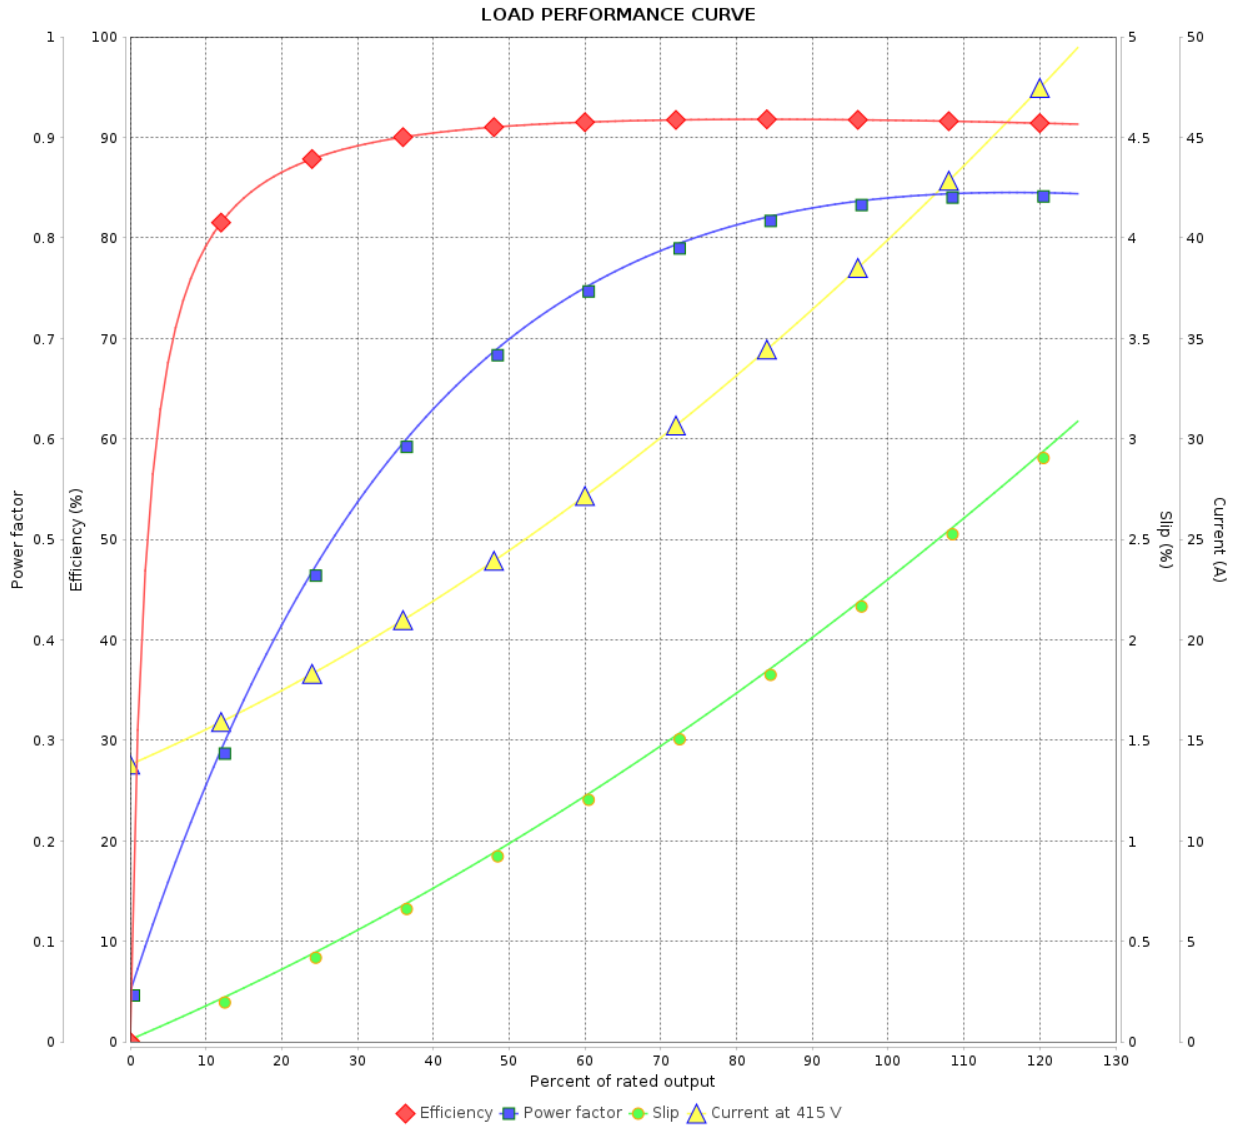

Performance : 415 V 50 Hz 4P IE2

Rated current : 39.7 A
 LRC : 6.0
 Rated torque : 14.9 kgfm
 Locked rotor torque : 220 %
 Breakdown torque : 240 %
 Rated speed : 1465 rpm

Moment of inertia (J) : 0.2467 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 105 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				