

# DATA SHEET



## Three Phase Induction Motor - Squirrel Cage

Customer :					
Product line	: W22 NEMA Premium Efficiency Three-Phase	Product code :	11611199		
Frame	: 143/5T	Cooling method	: IC411 - TEFC		
Insulation class	: F	Mounting	: F-1		
Duty cycle	: Cont.(S1)	Rotation <sup>1</sup>	: Both (CW and CCW)		
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line		
Altitude	: 1000 m.a.s.l.	Approx. weight <sup>3</sup>	: 22.6 kg		
Protection degree	: IP55	Moment of inertia (J)	: 0.0060 kgm <sup>2</sup>		
Design	: B				
Output [HP]	1.5	1.5	1.5	1.5	
Poles	4	4	4	4	
Frequency [Hz]	60	50	50	50	
Rated voltage [V]	230/460	380	400	415	
Rated current [A]	4.04/2.02	2.42	2.33	2.30	
L. R. Amperes [A]	33.9/17.0	15.5	16.3	17.0	
LRC [A]	8.4x(Code L)	6.4x(Code H)	7.0x(Code J)	7.4x(Code K)	
No load current [A]	2.20/1.10	1.10	1.20	1.30	
Rated speed [RPM]	1755	1440	1445	1450	
Slip [%]	2.50	4.00	3.67	3.33	
Rated torque [kgfm]	0.620	0.756	0.753	0.751	
Locked rotor torque [%]	290	220	250	280	
Breakdown torque [%]	350	250	290	320	
Service factor	1.25	1.25	1.25	1.25	
Temperature rise	80 K	80 K	80 K	80 K	
Locked rotor time	25s (cold) 14s (hot)	25s (cold) 14s (hot)	25s (cold) 14s (hot)	25s (cold) 14s (hot)	
Noise level <sup>2</sup>	51.0 dB(A)	49.0 dB(A)	49.0 dB(A)	49.0 dB(A)	
Efficiency (%)	25%				
	50%	82.5	82.5	82.5	
	75%	85.5	84.0	84.0	
	100%	86.5	84.1	84.1	
Power Factor	25%				
	50%	0.60	0.67	0.63	
	75%	0.70	0.76	0.74	
	100%	0.79	0.82	0.81	
Losses at normative operating points (speed;torque), in percentage of rated output power					
Losses (%)	P1 (0,9;1,0)	14.6	14.6	14.6	14.6
	P2 (0,5;1,0)	12.1	12.1	12.1	12.1
	P3 (0,25;1,0)	12.2	12.2	12.2	12.2
	P4 (0,9;0,5)	8.2	8.2	8.2	8.2
	P5 (0,5;0,5)	5.7	5.7	5.7	5.7
	P6 (0,5;0,25)	4.3	4.3	4.3	4.3
	P7 (0,25;0,25)	3.2	3.2	3.2	3.2
Bearing type	: Drive end : 6205 ZZ Non drive end : 6204 ZZ	Foundation loads			
Sealing	: V'Ring V'Ring	Max. traction	: 57 kgf		
Lubrication interval	: - -	Max. compression	: 80 kgf		
Lubricant amount	: - -				
Lubricant type	: Mobil Polyrex EM				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process.		These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.			
Rev.	Changes Summary	Performed	Checked	Date	
Performed by					
Checked by			Page	Revision	
Date	31/01/2024		1 / 6		

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Notes  
USABLE @208V 4.36A SF 1.15 SFA 5.01A

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	31/01/2024		2 / 6	

# LOAD PERFORMANCE CURVE


## Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11611199

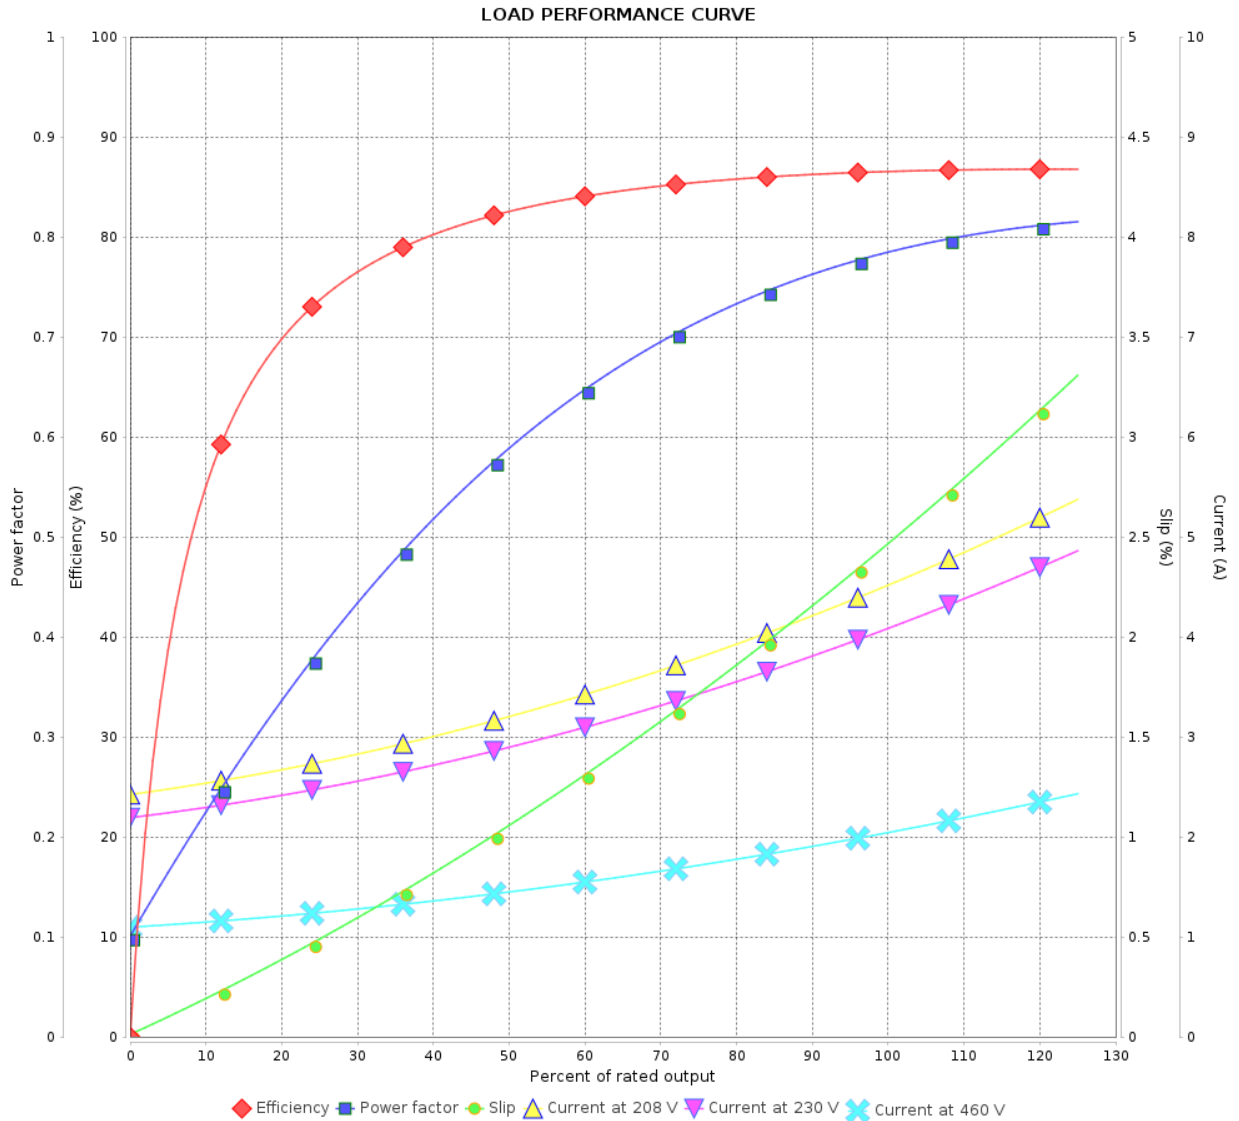

Performance : 230/460 V 60 Hz 4P

Rated current : 4.04/2.02 A  
 LRC : 8.4  
 Rated torque : 0.620 kgfm  
 Locked rotor torque : 290 %  
 Breakdown torque : 350 %  
 Rated speed : 1755 rpm

Moment of inertia (J) : 0.0060 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.25  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		3 / 6		
Date		31/01/2024		

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11611199

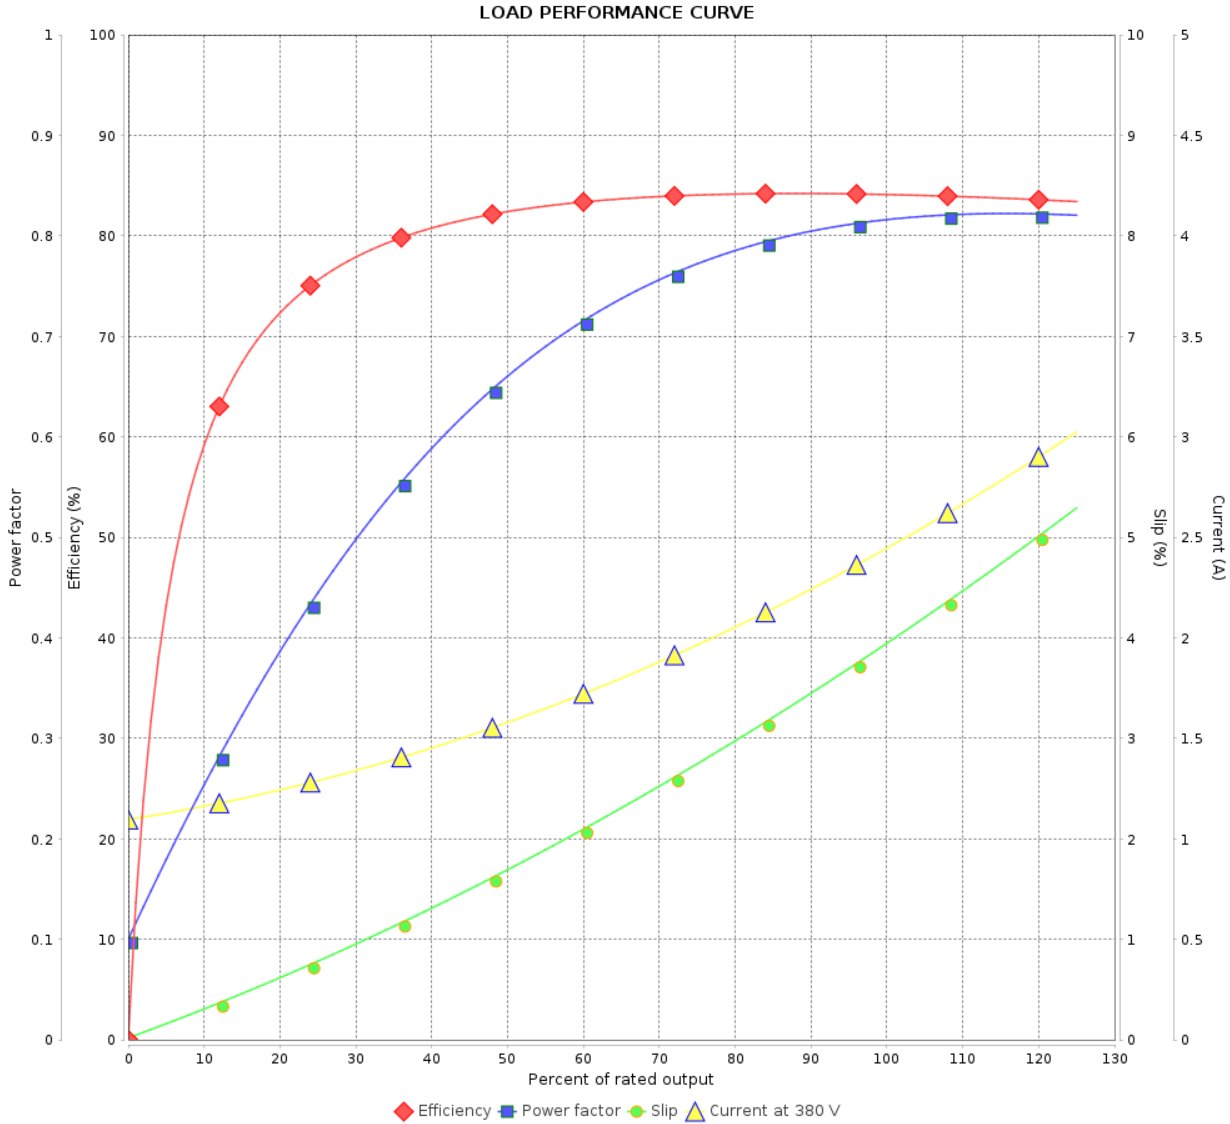

Performance : 380 V 50 Hz 4P IE3

Rated current : 2.42 A  
 LRC : 6.4  
 Rated torque : 0.756 kgfm  
 Locked rotor torque : 220 %  
 Breakdown torque : 250 %  
 Rated speed : 1440 rpm

Moment of inertia (J) : 0.0060 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.25  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 4 / 6	Revision
Checked by				
Date	31/01/2024			

# LOAD PERFORMANCE CURVE


## Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11611199

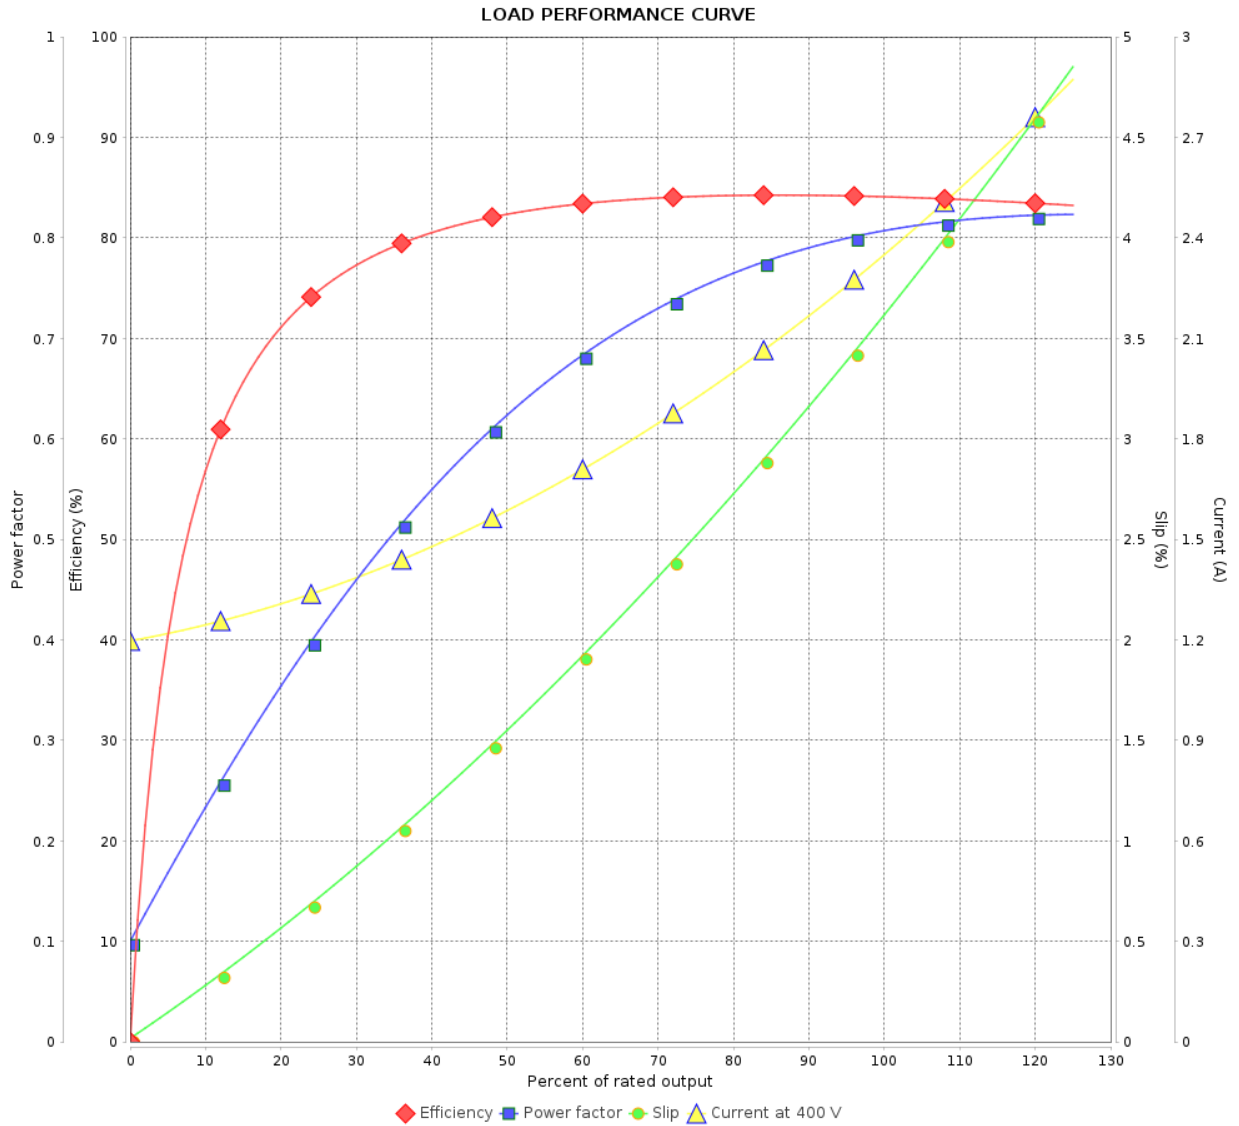

Performance : 400 V 50 Hz 4P IE3

Rated current : 2.33 A  
 LRC : 7.0  
 Rated torque : 0.753 kgfm  
 Locked rotor torque : 250 %  
 Breakdown torque : 290 %  
 Rated speed : 1445 rpm

Moment of inertia (J) : 0.0060 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.25  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 5 / 6	Revision
Checked by				
Date	31/01/2024			

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11611199

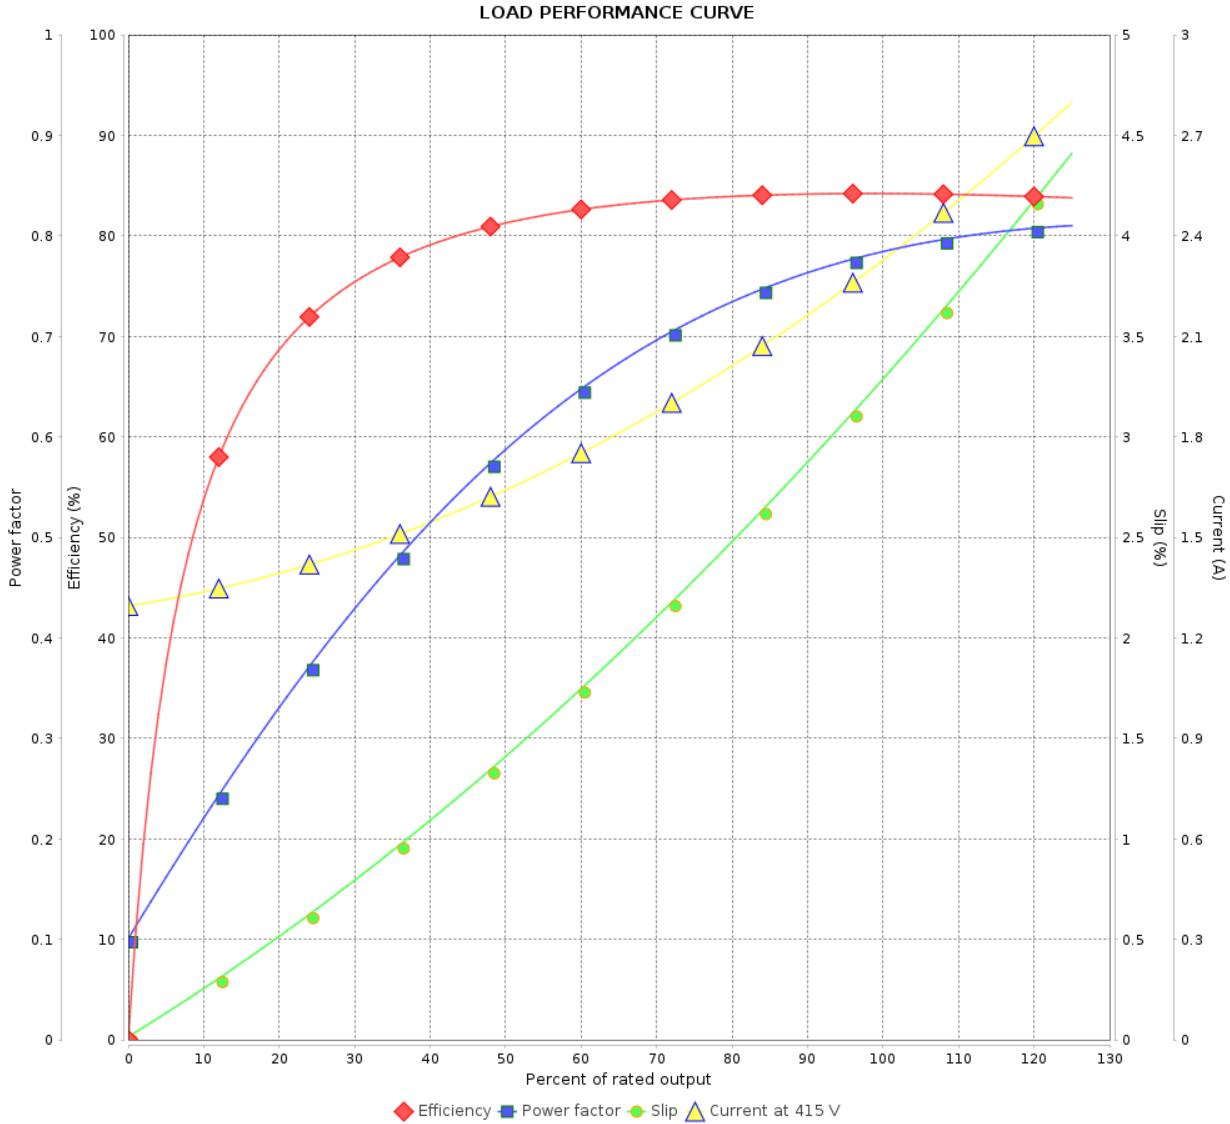

Performance : 415 V 50 Hz 4P IE3

Rated current : 2.30 A  
 LRC : 7.4  
 Rated torque : 0.751 kgfm  
 Locked rotor torque : 280 %  
 Breakdown torque : 320 %  
 Rated speed : 1450 rpm

Moment of inertia (J) : 0.0060 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.25  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 6 / 6	Revision
Checked by				
Date	31/01/2024			