

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :							
Product line	: W22 NEMA Premium Efficiency Three-Phase	Product code :	11611502				
Frame	: 404/5T	Cooling method	: IC411 - TEFC				
Insulation class	: F	Mounting	: F-1				
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)				
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line				
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 535 kg				
Protection degree	: IP55	Moment of inertia (J)	: 1.26 kgm ²				
Design	: B						
Output [HP]	100	75	75	75	100	100	100
Poles	4	4	4	4	4	4	4
Frequency [Hz]	60	50	50	50	50	50	50
Rated voltage [V]	230/460	380	400	415	380	400	415
Rated current [A]	226/113	102	98.3	95.9	138	131	127
L. R. Amperes [A]	1650/825	785	826	854	814	852	902
LRC [A]	7.3x(Code H)	7.7x(Code H)	8.4x(Code J)	8.9x(Code K)	5.9x(Code F)	6.5x(Code G)	7.1x(Code H)
No load current [A]	76.0/38.0	37.6	40.1	42.0	37.6	40.1	42.0
Rated speed [RPM]	1780	1485	1485	1485	1470	1475	1475
Slip [%]	1.11	1.00	1.00	1.00	2.00	1.67	1.67
Rated torque [kgfm]	40.8	36.7	36.7	36.7	49.4	49.2	49.2
Locked rotor torque [%]	240	260	280	290	190	210	220
Breakdown torque [%]	260	280	310	330	210	229	250
Service factor	1.25	1.00	1.00	1.00	1.00	1.00	1.00
Temperature rise	80 K	80 K	80 K	80 K	105 K	105 K	105 K
Locked rotor time	23s (cold) 13s (hot)	16s (cold) 9s (hot)	16s (cold) 9s (hot)	16s (cold) 9s (hot)	16s (cold) 9s (hot)	16s (cold) 9s (hot)	16s (cold) 9s (hot)
Noise level ²	68.0 dB(A)	64.0 dB(A)	64.0 dB(A)	64.0 dB(A)	64.0 dB(A)	64.0 dB(A)	64.0 dB(A)
Efficiency (%)	25%	0.000			0.000		
	50%	95.0	94.0	93.9	93.6	94.5	94.5
	75%	95.0	94.4	94.5	94.5	94.1	94.5
	100%	95.4	95.0	95.0	95.0	93.6	94.1
Power Factor	25%	0.00			0.00		
	50%	0.77	0.72	0.69	0.66	0.82	0.79
	75%	0.84	0.83	0.81	0.79	0.86	0.85
	100%	0.87	0.86	0.85	0.84	0.88	0.88
Losses at normative operating points (speed;torque), in percentage of rated output power							
Losses (%)	P1 (0,9;1,0)	4.7	4.7	4.7	4.7	4.7	4.7
	P2 (0,5;1,0)	3.8	3.8	3.8	3.8	3.8	3.8
	P3 (0,25;1,0)	3.7	3.7	3.7	3.7	3.7	3.7
	P4 (0,9;0,5)	2.2	2.2	2.2	2.2	2.2	2.2
	P5 (0,5;0,5)	1.5	1.5	1.5	1.5	1.5	1.5
	P6 (0,5;0,25)	0.9	0.9	0.9	0.9	0.9	0.9
	P7 (0,25;0,25)	0.6	0.6	0.6	0.6	0.6	0.6
Bearing type	: Drive end : NU-316 C3	Non drive end : 6314 C3	Foundation loads				
Sealing	: WSeal	WSeal	Max. traction : 944 kgf				
Lubrication interval	: 7000 h	12000 h	Max. compression : 1479 kgf				
Lubricant amount	: 34 g	27 g					
Lubricant type	: Mobil Polyrex EM						
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end.				These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.			
Rev.	Changes Summary			Performed	Checked	Date	
Performed by							
Checked by					Page	Revision	
Date	20/08/2023				1 / 9		

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Notes
USABLE @208V 245A SF 1.10 SFA 270A

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	20/08/2023		2 / 9	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11611502

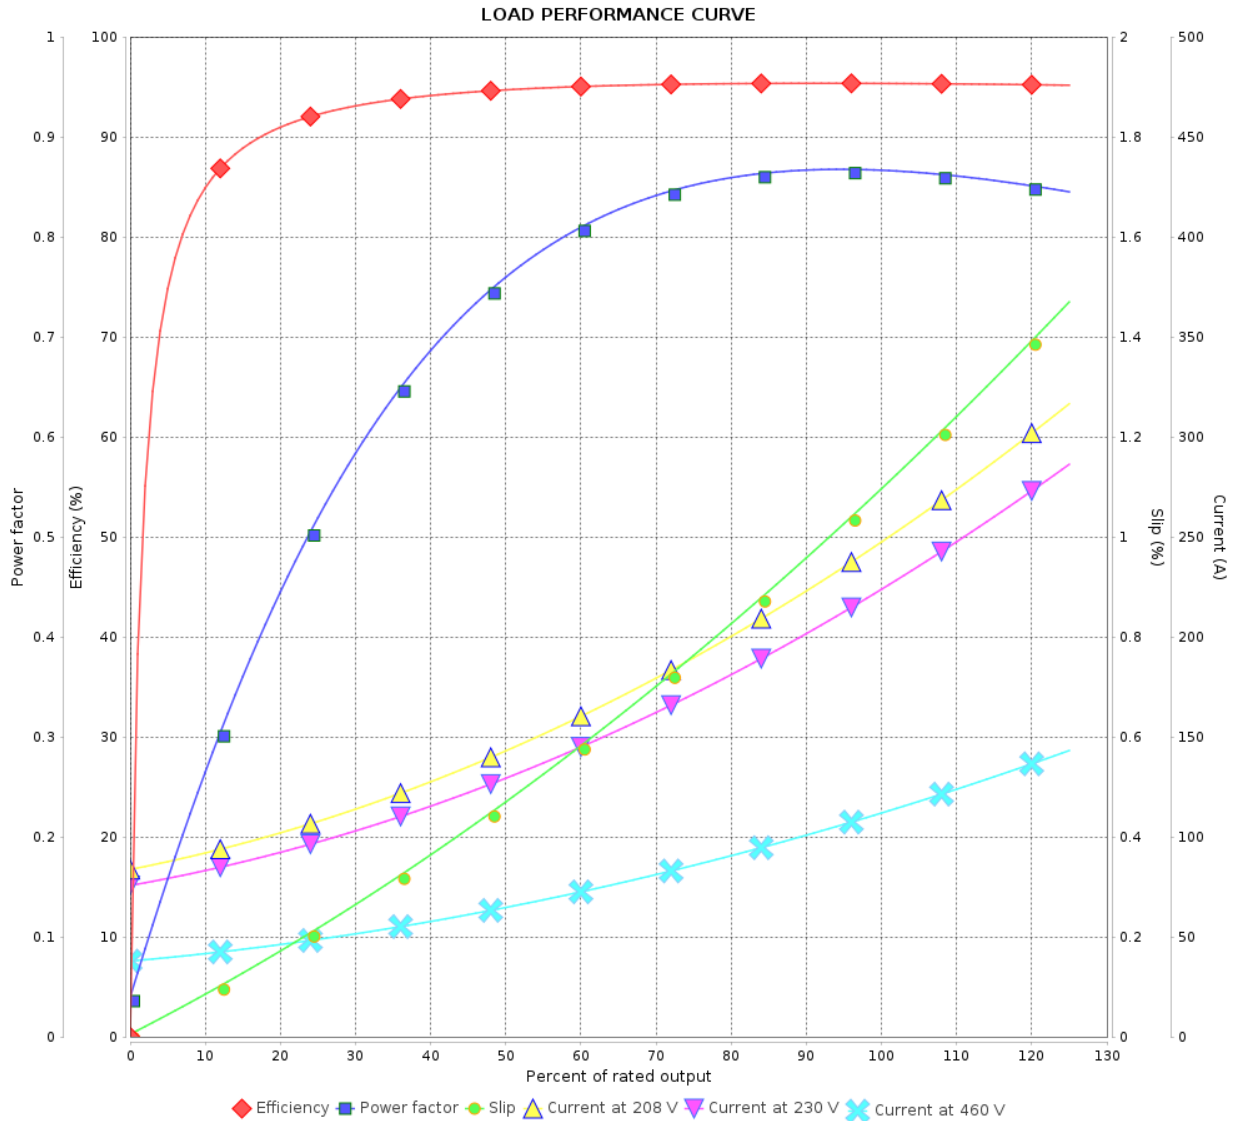

Performance : 230/460 V 60 Hz 4P

Rated current : 226/113 A
 LRC : 7.3
 Rated torque : 40.8 kgfm
 Locked rotor torque : 240 %
 Breakdown torque : 260 %
 Rated speed : 1780 rpm

Moment of inertia (J) : 1.26 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.25
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11611502

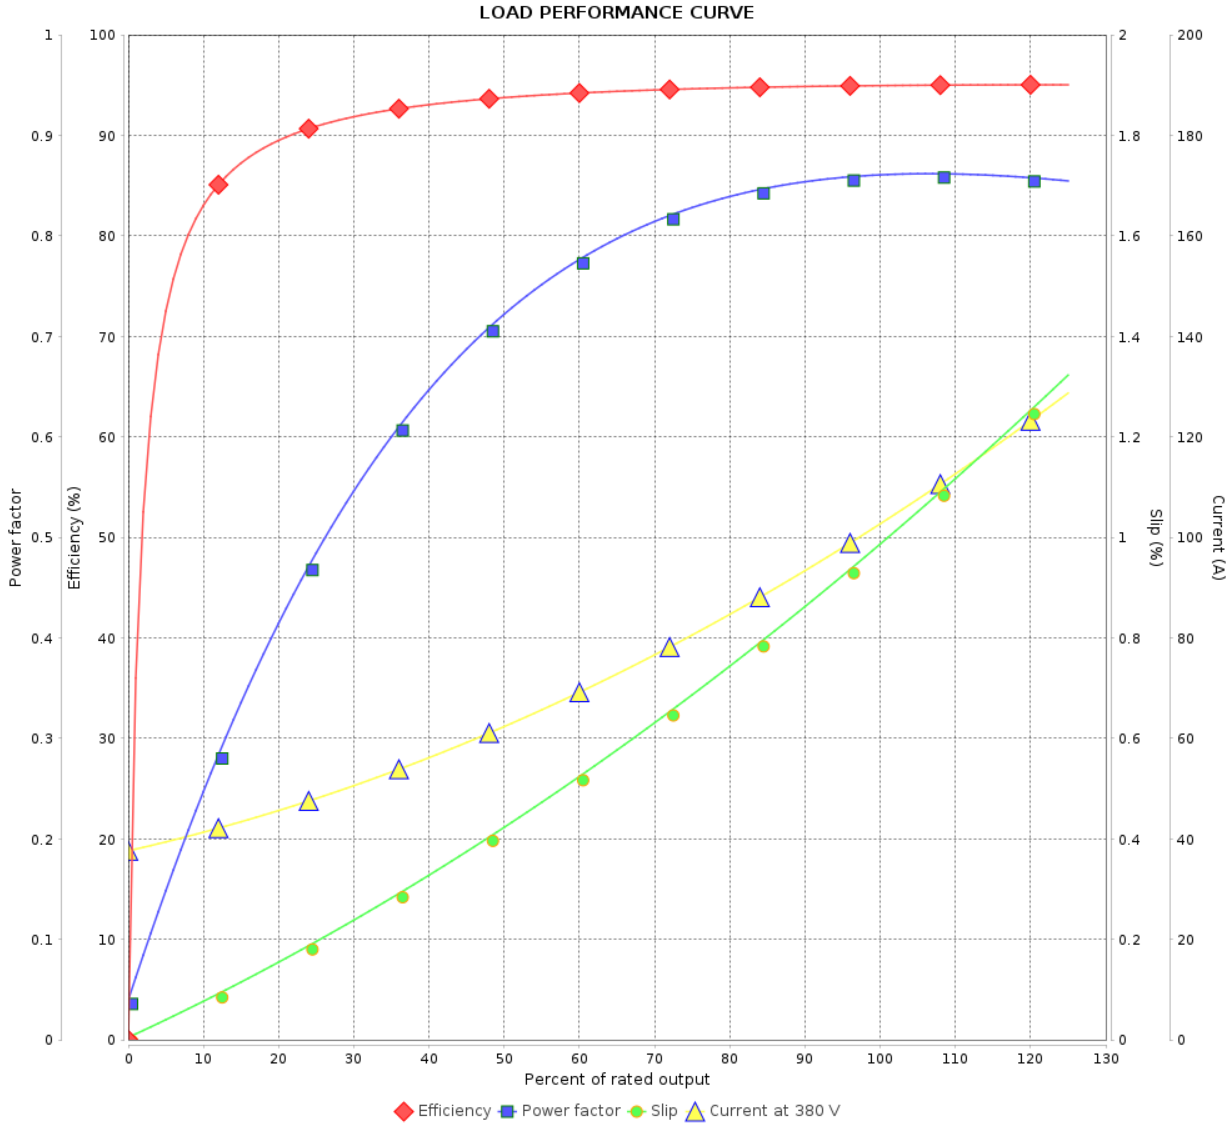

Performance : 380 V 50 Hz 4P IE3

Rated current	: 102 A	Moment of inertia (J)	: 1.26 kgm ²
LRC	: 7.7	Duty cycle	: Cont.(S1)
Rated torque	: 36.7 kgfm	Insulation class	: F
Locked rotor torque	: 260 %	Service factor	: 1.00
Breakdown torque	: 280 %	Temperature rise	: 80 K
Rated speed	: 1485 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 4 / 9	Revision
Checked by				
Date	20/08/2023			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11611502

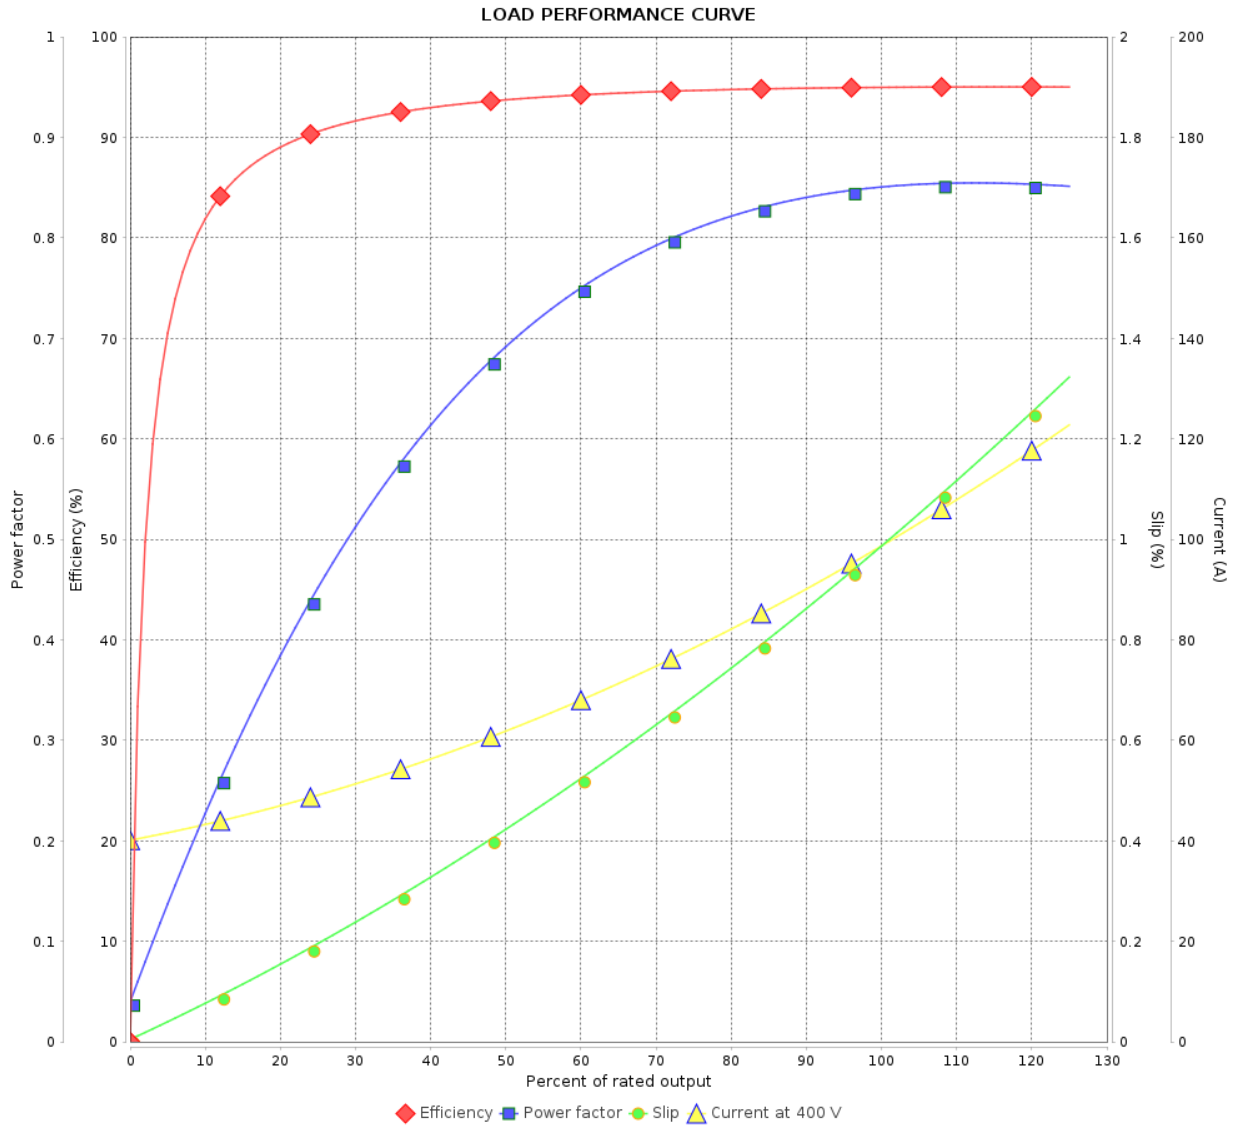

Performance : 400 V 50 Hz 4P IE3

Rated current : 98.3 A
 LRC : 8.4
 Rated torque : 36.7 kgfm
 Locked rotor torque : 280 %
 Breakdown torque : 310 %
 Rated speed : 1485 rpm

Moment of inertia (J) : 1.26 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date				
		Page	Revision	
		5 / 9		

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11611502

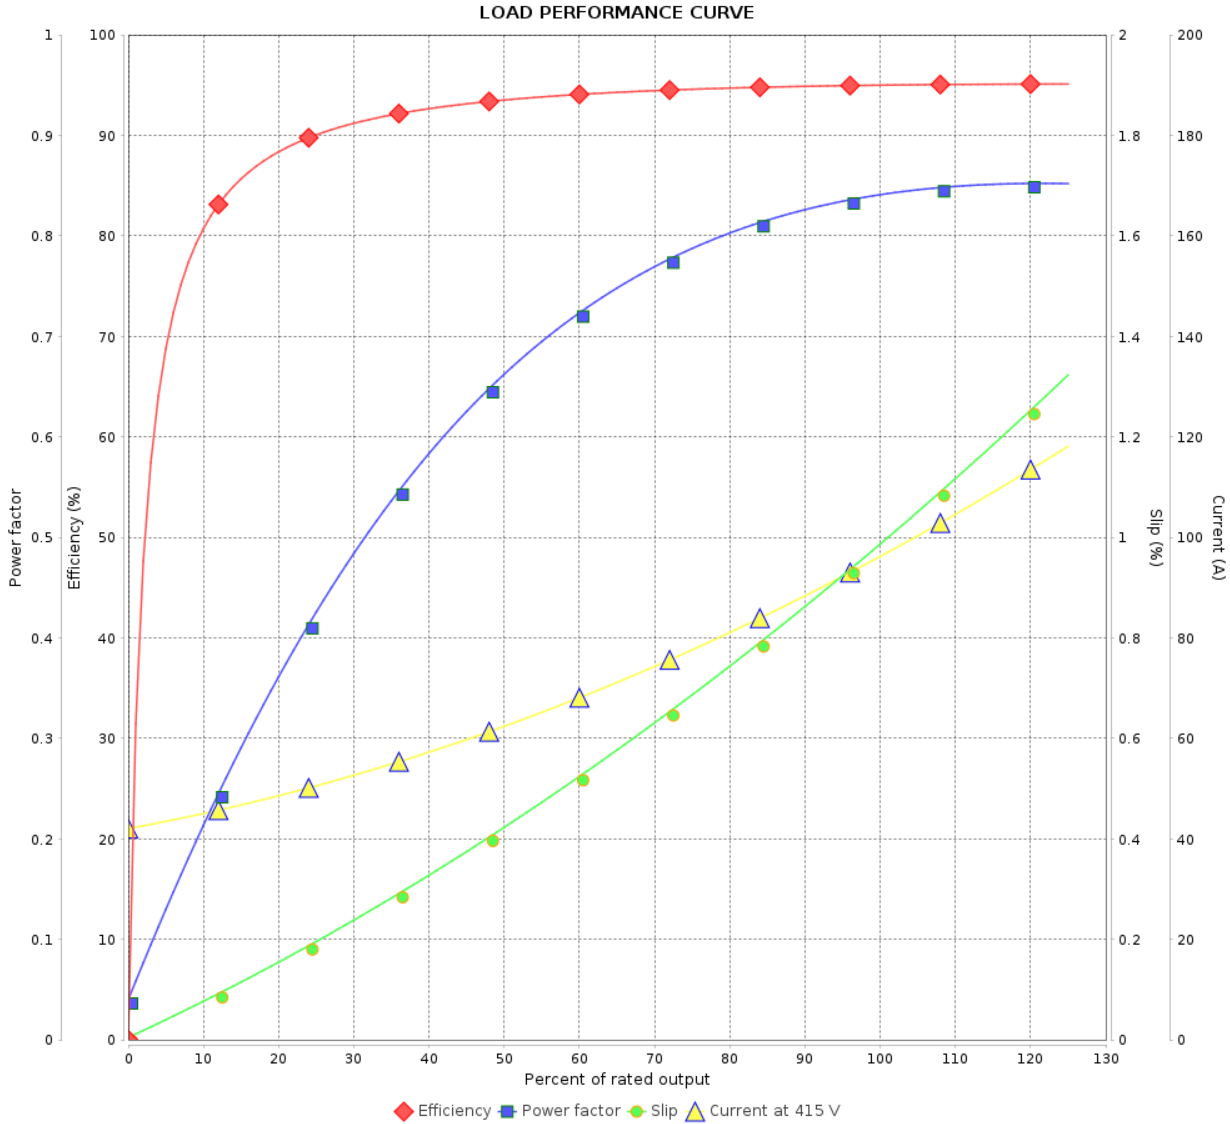

Performance : 415 V 50 Hz 4P IE3

Rated current	: 95.9 A	Moment of inertia (J)	: 1.26 kgm ²
LRC	: 8.9	Duty cycle	: Cont.(S1)
Rated torque	: 36.7 kgfm	Insulation class	: F
Locked rotor torque	: 290 %	Service factor	: 1.00
Breakdown torque	: 330 %	Temperature rise	: 80 K
Rated speed	: 1485 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 6 / 9	Revision
Checked by				
Date	20/08/2023			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11611502

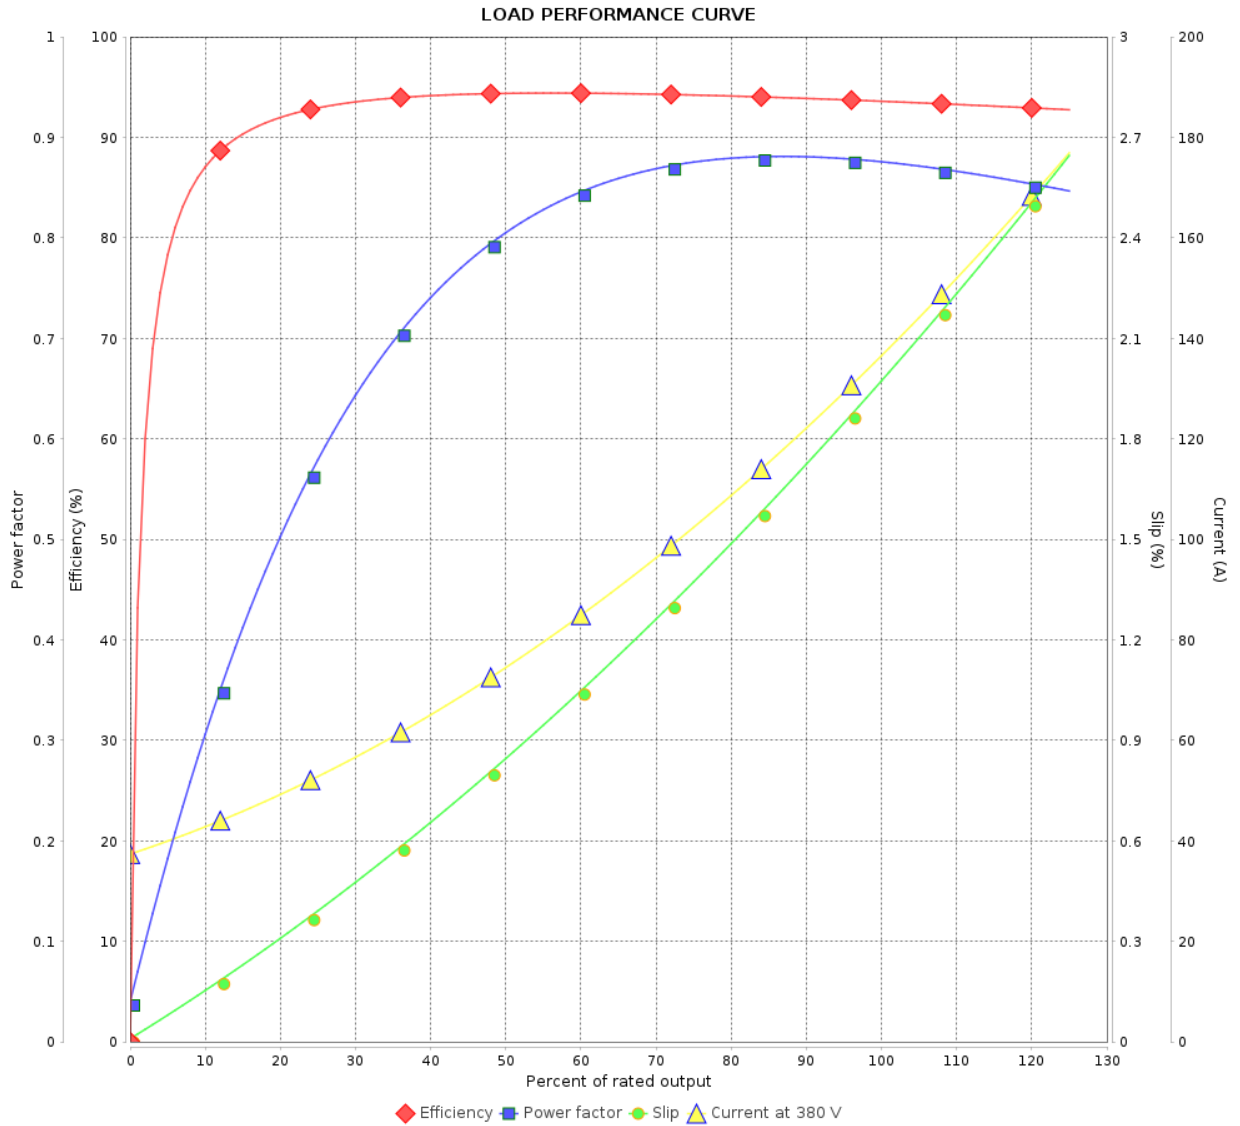

Performance : 380 V 50 Hz 4P IE1

Rated current : 138 A
 LRC : 5.9
 Rated torque : 49.4 kgfm
 Locked rotor torque : 190 %
 Breakdown torque : 210 %
 Rated speed : 1470 rpm

Moment of inertia (J) : 1.26 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 105 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date				
		Page	Revision	
		7 / 9		

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11611502

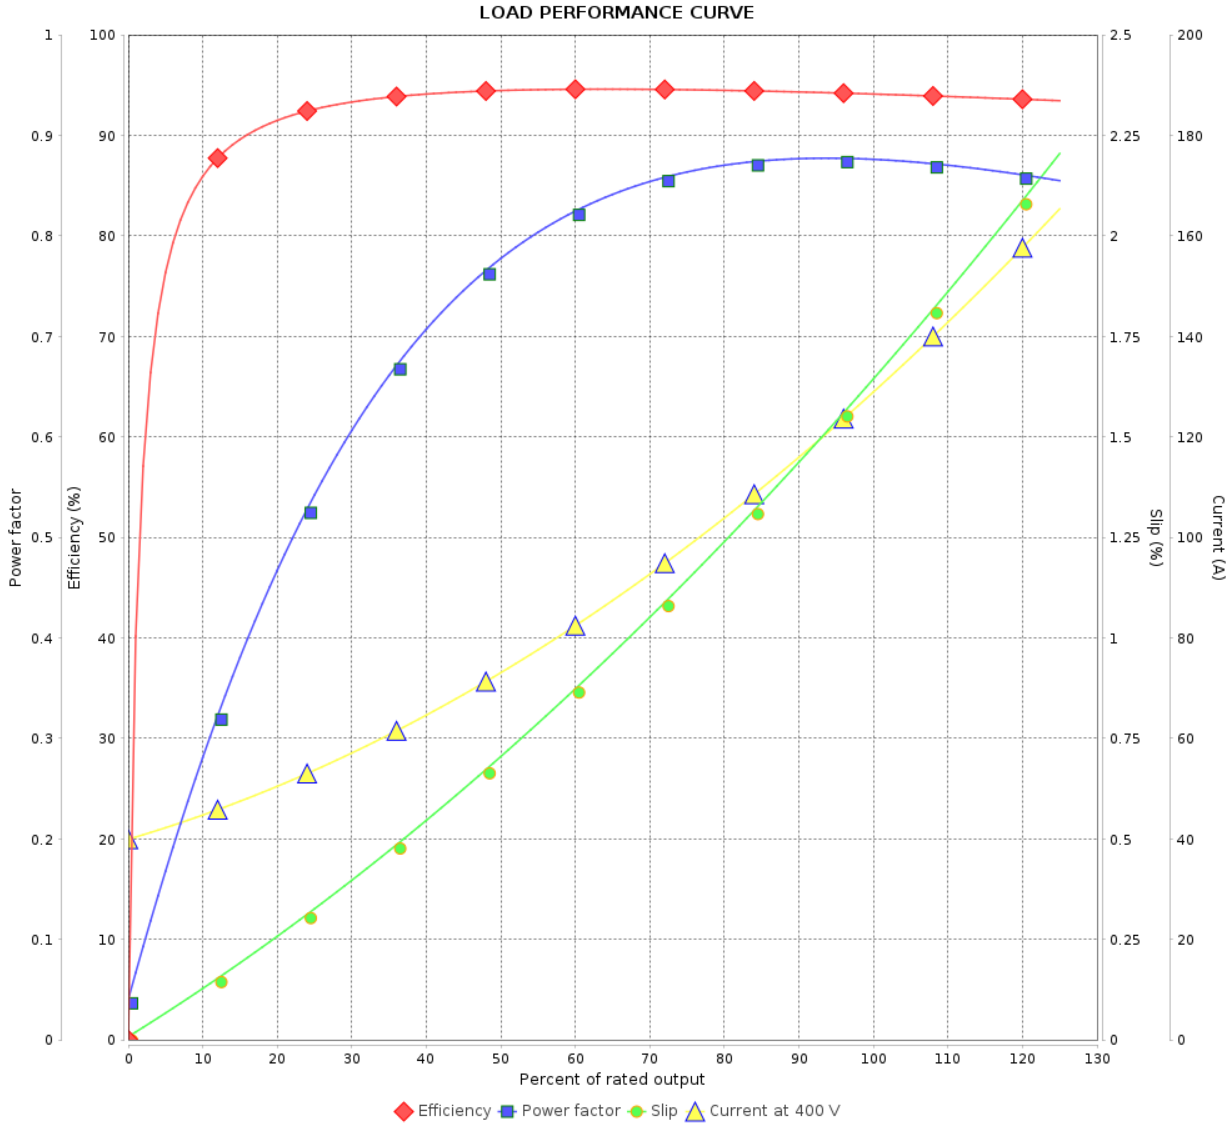

Performance : 400 V 50 Hz 4P IE2

Rated current	: 131 A	Moment of inertia (J)	: 1.26 kgm ²
LRC	: 6.5	Duty cycle	: Cont.(S1)
Rated torque	: 49.2 kgfm	Insulation class	: F
Locked rotor torque	: 210 %	Service factor	: 1.00
Breakdown torque	: 229 %	Temperature rise	: 105 K
Rated speed	: 1475 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 8 / 9	Revision
Checked by				
Date	20/08/2023			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11611502

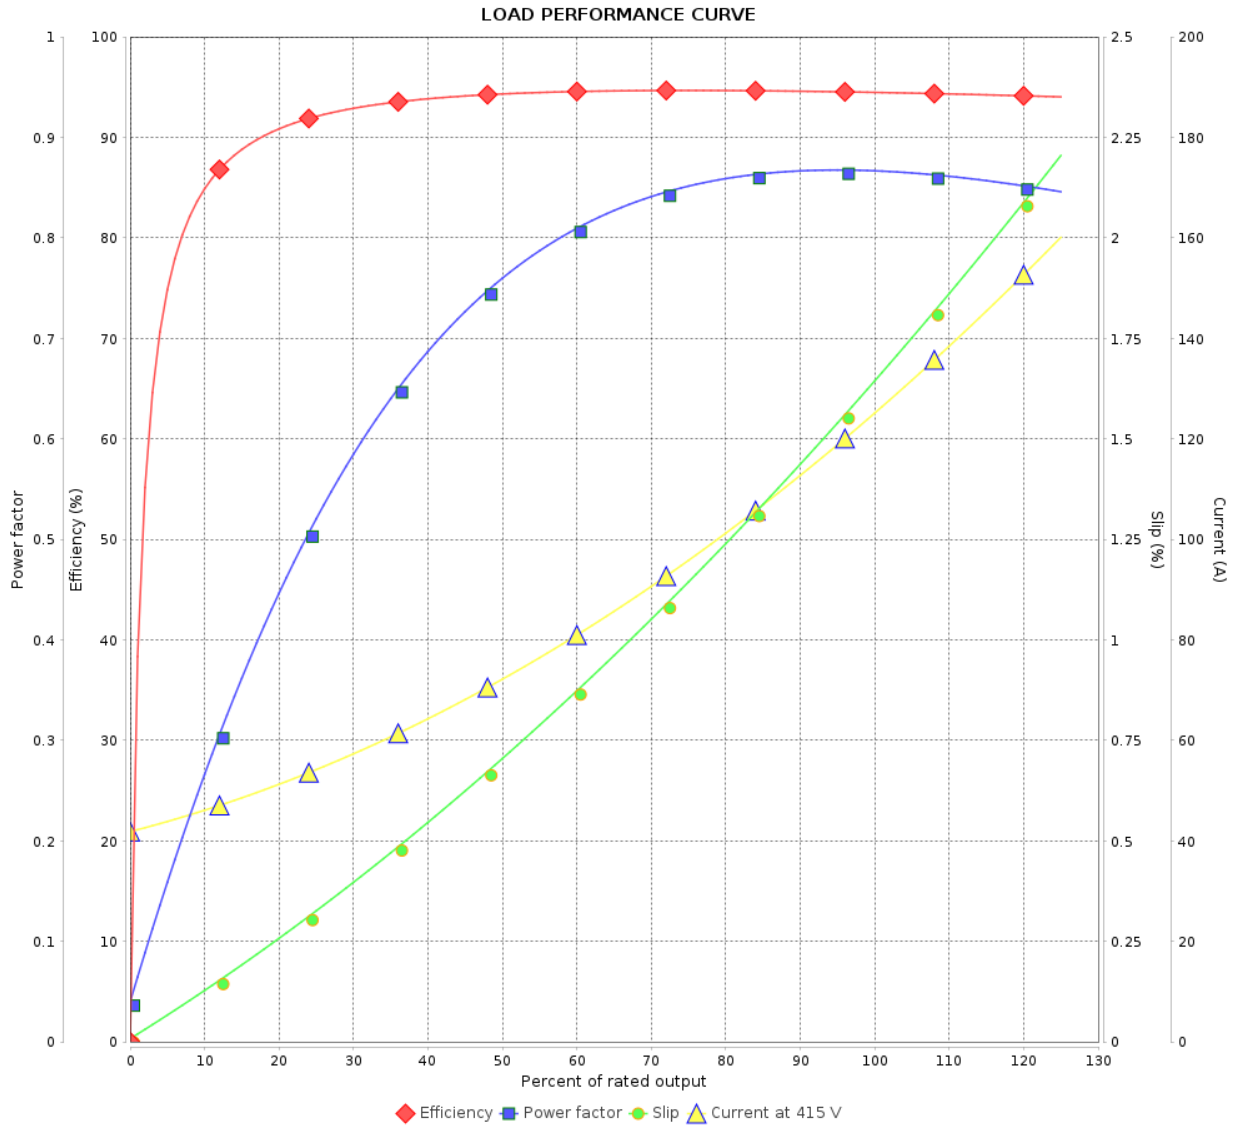

Performance : 415 V 50 Hz 4P IE2

Rated current : 127 A
 LRC : 7.1
 Rated torque : 49.2 kgfm
 Locked rotor torque : 220 %
 Breakdown torque : 250 %
 Rated speed : 1475 rpm

Moment of inertia (J) : 1.26 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 105 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				