

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : ODP NEMA Premium Efficiency Three-Phase Product code : 11830676

Frame	: 444/5T	Locked rotor time	: 28s (cold) 16s (hot)
Output	: 200 HP (150 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 183 A	Protection degree	: IP23
L. R. Amperes	: 1118 A	Cooling method	: IC01 - ODP
LRC	: 6.1x(Code F)	Mounting	: F-1
No load current	: 60.0 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 1780 rpm	Noise level ²	: 78.0 dB(A)
Slip	: 1.11 %	Starting method	: Direct On Line
Rated torque	: 81.5 kgfm	Approx. weight ³	: 656 kg
Locked rotor torque	: 200 %		
Breakdown torque	: 229 %		
Insulation class	: F		
Service factor	: 1.15		
Moment of inertia (J)	: 2.09 kgm ²		
Design	: B		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	95.4	95.8	95.8	Max. traction	: 1312 kgf
Power Factor	0.76	0.83	0.86	Max. compression	: 1969 kgf

		<u>Drive end</u>	<u>Non drive end</u>
Bearing type	:	6319 C3	6316 C3
Sealing	:	Without Bearing Seal	Without Bearing Seal
Lubrication interval	:	20000 h	20000 h
Lubricant amount	:	45 g	34 g
Lubricant type	:	Mobil Polyrex EM	

Notes:

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		1 / 2		
Date	22/01/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : ODP NEMA Premium Efficiency Three-Phase

Product code : 11830676

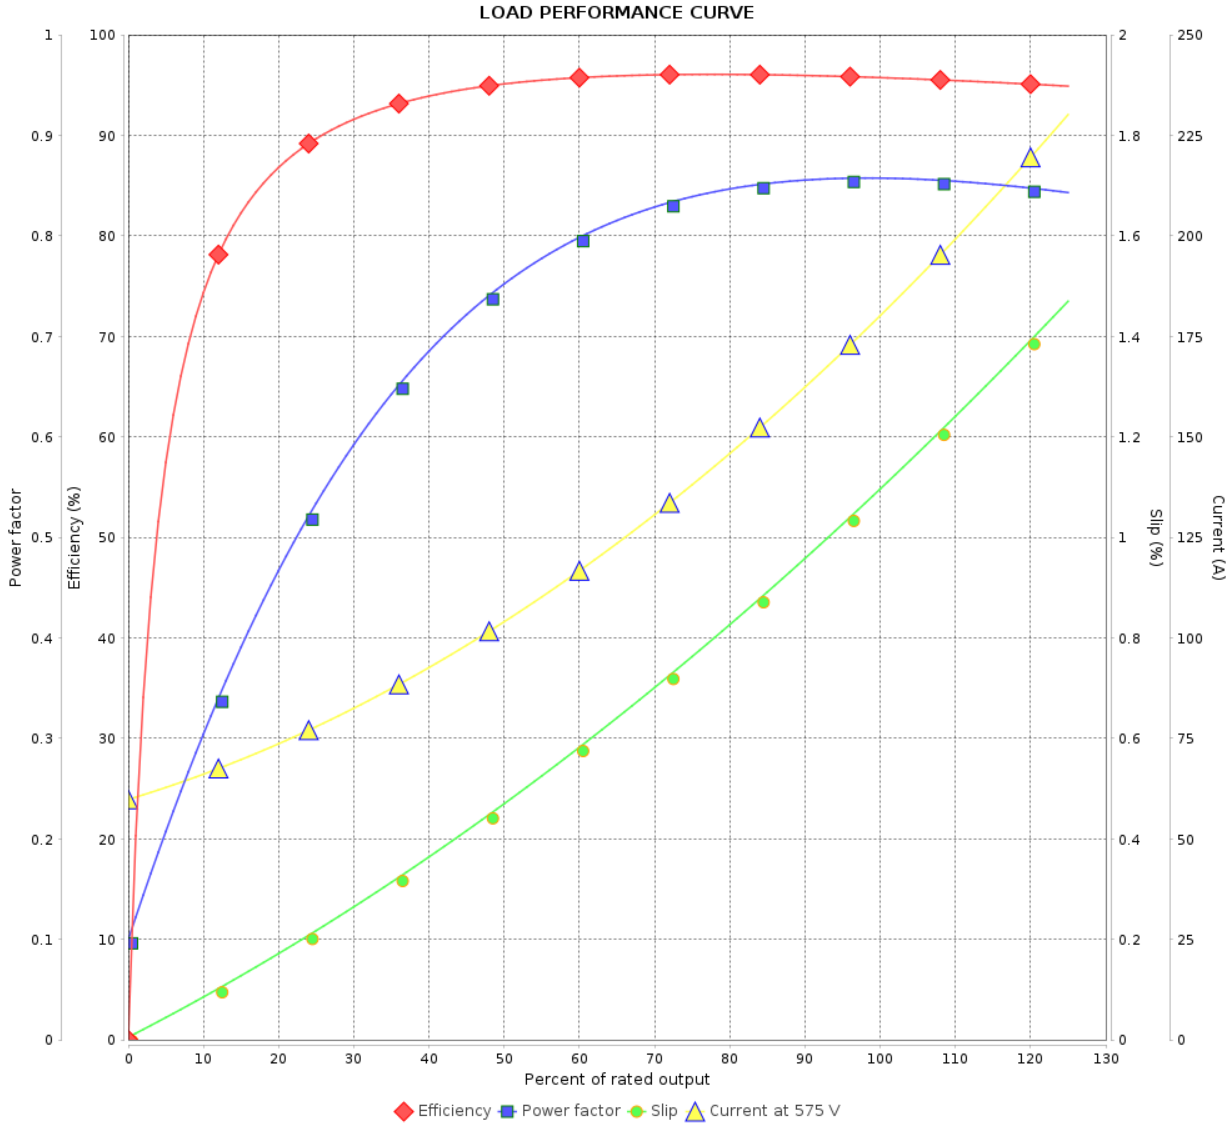

Performance : 575 V 60 Hz 4P

Rated current	: 183 A	Moment of inertia (J)	: 2.09 kgm ²
LRC	: 6.1	Duty cycle	: Cont.(S1)
Rated torque	: 81.5 kgfm	Insulation class	: F
Locked rotor torque	: 200 %	Service factor	: 1.15
Breakdown torque	: 229 %	Temperature rise	: 80 K
Rated speed	: 1780 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	22/01/2024			