

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : ODP NEMA Premium Efficiency Three-Phase Product code : 11914799

|                       |                           |                             |                       |
|-----------------------|---------------------------|-----------------------------|-----------------------|
| Frame                 | : 256TC                   | Locked rotor time           | : 16s (cold) 9s (hot) |
| Output                | : 25 HP (18.5 kW)         | Temperature rise            | : 80 K                |
| Poles                 | : 2                       | Duty cycle                  | : Cont.(S1)           |
| Frequency             | : 60 Hz                   | Ambient temperature         | : -20°C to +40°C      |
| Rated voltage         | : 575 V                   | Altitude                    | : 1000 m.a.s.l.       |
| Rated current         | : 23.8 A                  | Protection degree           | : IP23                |
| L. R. Amperes         | : 155 A                   | Cooling method              | : IC01 - ODP          |
| LRC                   | : 6.5x(Code G)            | Mounting                    | : F-1                 |
| No load current       | : 8.80 A                  | Rotation <sup>1</sup>       | : Both (CW and CCW)   |
| Rated speed           | : 3530 rpm                | Noise level <sup>2</sup>    | : 67.0 dB(A)          |
| Slip                  | : 1.94 %                  | Starting method             | : Direct On Line      |
| Rated torque          | : 5.14 kgfm               | Approx. weight <sup>3</sup> | : 110 kg              |
| Locked rotor torque   | : 200 %                   |                             |                       |
| Breakdown torque      | : 260 %                   |                             |                       |
| Insulation class      | : F                       |                             |                       |
| Service factor        | : 1.15                    |                             |                       |
| Moment of inertia (J) | : 0.0456 kgm <sup>2</sup> |                             |                       |
| Design                | : B                       |                             |                       |

|                |      |      |      |                  |           |
|----------------|------|------|------|------------------|-----------|
| Output         | 50%  | 75%  | 100% | Foundation loads |           |
| Efficiency (%) | 91.0 | 91.7 | 91.7 | Max. traction    | : 155 kgf |
| Power Factor   | 0.73 | 0.82 | 0.85 | Max. compression | : 265 kgf |

|                      |   |                      |                      |
|----------------------|---|----------------------|----------------------|
|                      |   | <u>Drive end</u>     | <u>Non drive end</u> |
| Bearing type         | : | 6309 Z C3            | 6209 Z C3            |
| Sealing              | : | Without Bearing Seal | Without Bearing Seal |
| Lubrication interval | : | 20000 h              | 20000 h              |
| Lubricant amount     | : | 13 g                 | 9 g                  |
| Lubricant type       | : | Mobil Polyrex EM     |                      |

### Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

| Rev.         | Changes Summary | Performed                 | Checked | Date |
|--------------|-----------------|---------------------------|---------|------|
|              |                 |                           |         |      |
| Performed by |                 | Page<br>1 / 2<br>Revision |         |      |
| Checked by   |                 |                           |         |      |
| Date         | 27/10/2025      |                           |         |      |

# LOAD PERFORMANCE CURVE


## Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : ODP NEMA Premium Efficiency  
Three-Phase

Product code : 11914799

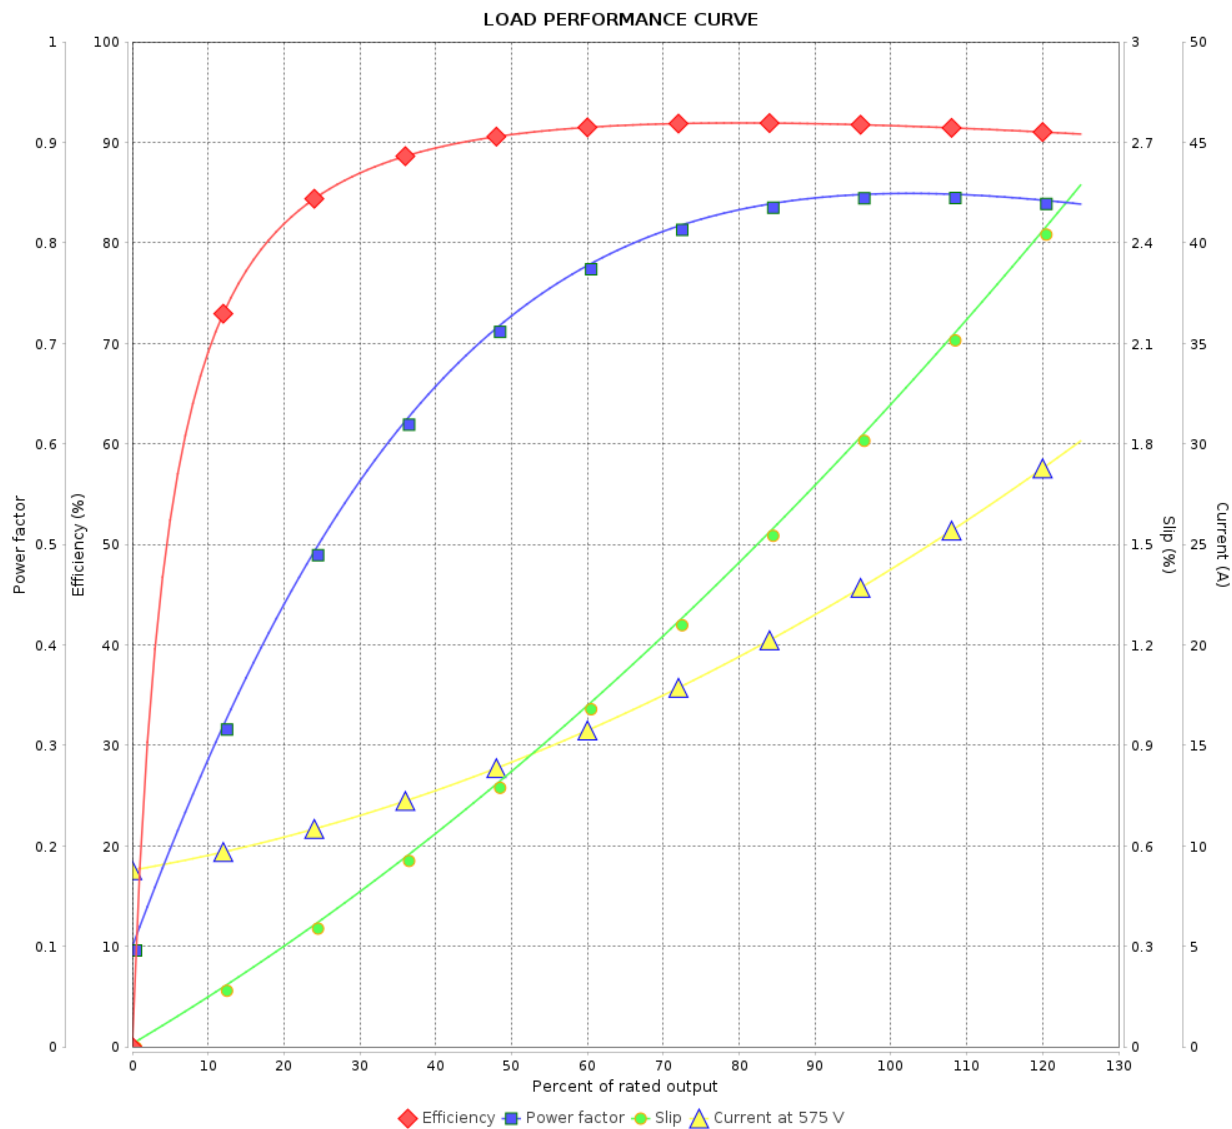

Performance : 575 V 60 Hz 2P

Rated current : 23.8 A  
LRC : 6.5  
Rated torque : 5.14 kgfm  
Locked rotor torque : 200 %  
Breakdown torque : 260 %  
Rated speed : 3530 rpm

Moment of inertia (J) : 0.0456 kgm<sup>2</sup>  
Duty cycle : Cont.(S1)  
Insulation class : F  
Service factor : 1.15  
Temperature rise : 80 K  
Design : B

| Rev.         | Changes Summary |  | Performed | Checked       | Date     |
|--------------|-----------------|--|-----------|---------------|----------|
|              |                 |  |           |               |          |
| Performed by |                 |  |           | Page<br>2 / 2 | Revision |
| Checked by   |                 |  |           |               |          |
| Date         | 27/10/2025      |  |           |               |          |