

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer : _____

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase Product code : 11919900

Frame	: 182/4T	Cooling method	: IC411 - TEFC
Insulation class	: F	Mounting	: F-1
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line
Altitude	: 1000 m.a.s.l.	Approx. weight ²	: 50.4 kg
Protection degree	: IP55	Moment of inertia (J)	: 0.0169 kgm ²
Design	: B		

Output [HP]	5	4	4	4	5	5	5
Poles	4	4	4	4	4	4	4
Frequency [Hz]	60	50	50	50	50	50	50
Rated voltage [V]	460	380	400	415	380	400	415
Rated current [A]	6.49	6.42	6.21	6.23	7.74	7.44	7.35
L. R. Amperes [A]	50.0	44.9	47.8	51.1	44.9	47.6	50.7
LRC [A]	7.7x(Code J)	7.0x(Code J)	7.7x(Code K)	8.2x(Code L)	5.8x(Code G)	6.4x(Code H)	6.9x(Code J)
No load current [A]	2.90	2.80	3.10	3.30	2.80	3.10	3.30
Rated speed [RPM]	1750	1455	1455	1460	1430	1440	1445
Slip [%]	2.78	3.00	3.00	2.67	4.67	4.00	3.67
Rated torque [kgfm]	2.07	2.00	2.00	1.99	2.54	2.52	2.51
Locked rotor torque [%]	229	229	260	290	185	210	229
Breakdown torque [%]	290	300	300	350	225	250	270
Service factor	1.25	1.15	1.15	1.15	1.15	1.15	1.15
Temperature rise	80 K	80 K	80 K	80 K	80 K	80 K	80 K
Locked rotor time	21s (cold) 12s (hot)	54s (cold) 30s (hot)	48s (cold) 27s (hot)	43s (cold) 24s (hot)	41s (cold) 23s (hot)	39s (cold) 22s (hot)	36s (cold) 20s (hot)
Noise level ²	56.0 dB(A)	56.0 dB(A)	56.0 dB(A)	56.0 dB(A)	56.0 dB(A)	56.0 dB(A)	56.0 dB(A)
Efficiency (%)	25%						
	50%	88.5	87.5	86.7	86.5	88.5	87.5
	75%	89.5	88.2	88.2	88.2	87.5	88.5
	100%	89.5	87.7	88.2	88.2	86.5	87.5
Power Factor	25%						
	50%	0.62	0.61	0.57	0.53	0.69	0.65
	75%	0.74	0.75	0.71	0.67	0.80	0.77
	100%	0.80	0.81	0.79	0.76	0.84	0.82

Losses at normative operating points (speed;torque), in percentage of rated output power

Losses (%)	P1 (0,9;1,0)	11.3	13.6	12.9	12.9	15.1	13.8	13.8
	P2 (0,5;1,0)	9.5	11.4	10.9	10.9	12.7	11.6	11.6
	P3 (0,25;1,0)	8.7	10.4	10.0	10.0	11.6	10.6	10.6
	P4 (0,9;0,5)	5.5	6.5	6.2	6.2	7.3	6.7	6.7
	P5 (0,5;0,5)	3.8	4.5	4.3	4.3	5.0	4.6	4.6
	P6 (0,5;0,25)	2.5	3.0	2.9	2.9	3.4	3.1	3.1
	P7 (0,25;0,25)	1.8	2.2	2.1	2.1	2.4	2.2	2.2

Bearing type	: Drive end 6207 C3 Non drive end 6206 C3	Foundation loads Max. traction : 117 kgf Max. compression : 167 kgf
Sealing	: Taconite Labyrinth Taconite Labyrinth	
Lubrication interval	: 20000 h 20000 h	
Lubricant amount	: 7 g 5 g	
Lubricant type	: Mobil Polyrex EM	

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	13/01/2024		1 / 9	

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Notes

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	13/01/2024		2 / 9	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase

Product code : 11919900

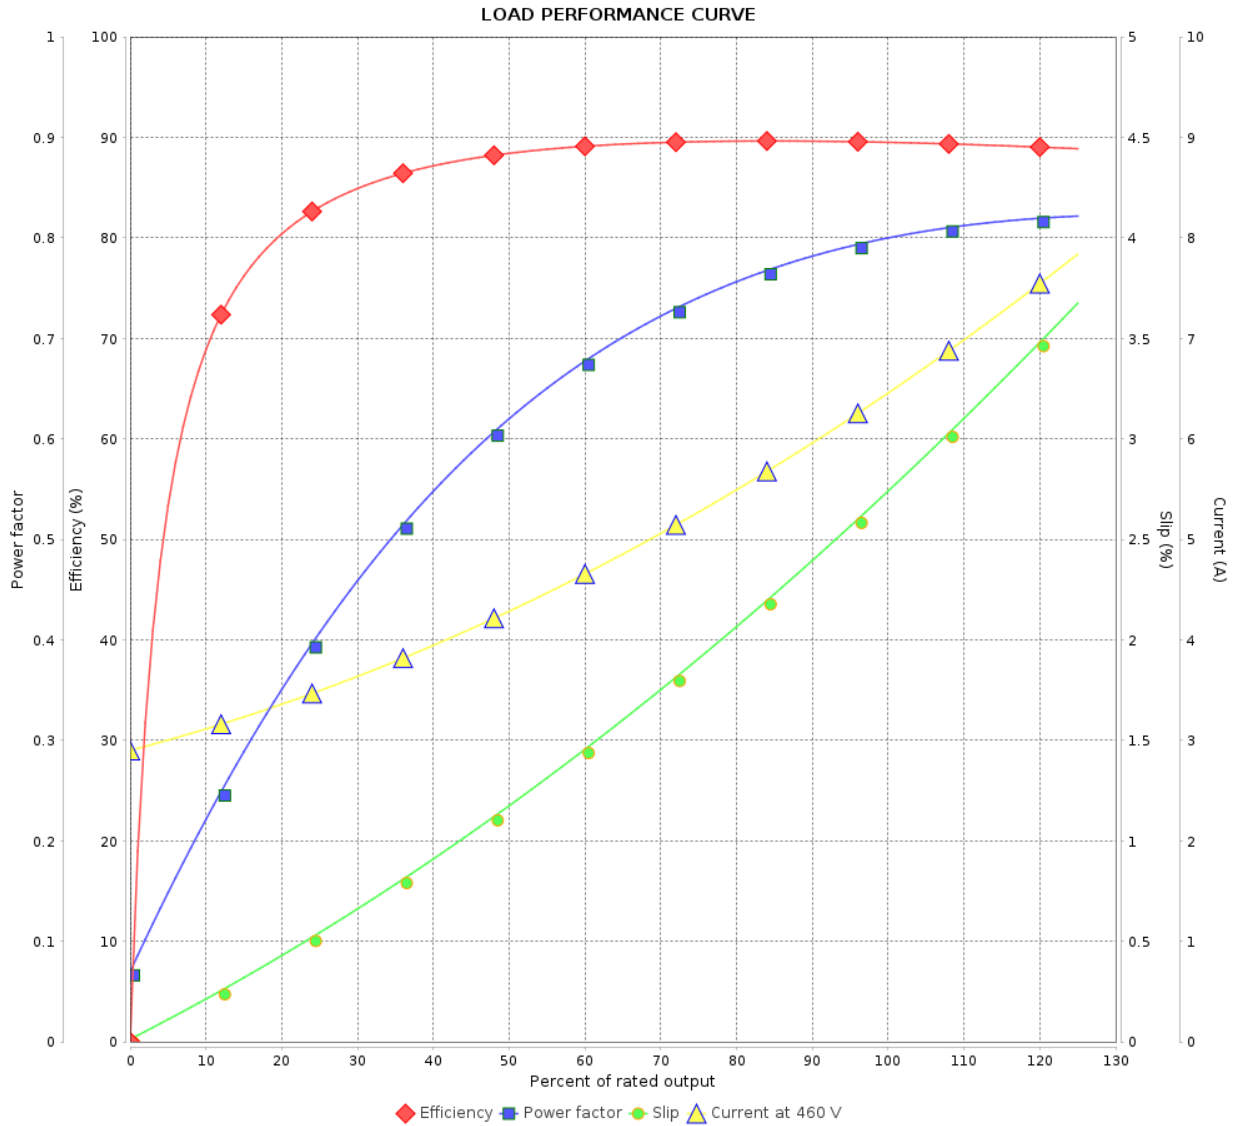

Performance : 460 V 60 Hz 4P

Rated current : 6.49 A
 LRC : 7.7
 Rated torque : 2.07 kgfm
 Locked rotor torque : 229 %
 Breakdown torque : 290 %
 Rated speed : 1750 rpm

Moment of inertia (J) : 0.0169 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.25
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase Product code : 11919900

LOAD PERFORMANCE CURVE

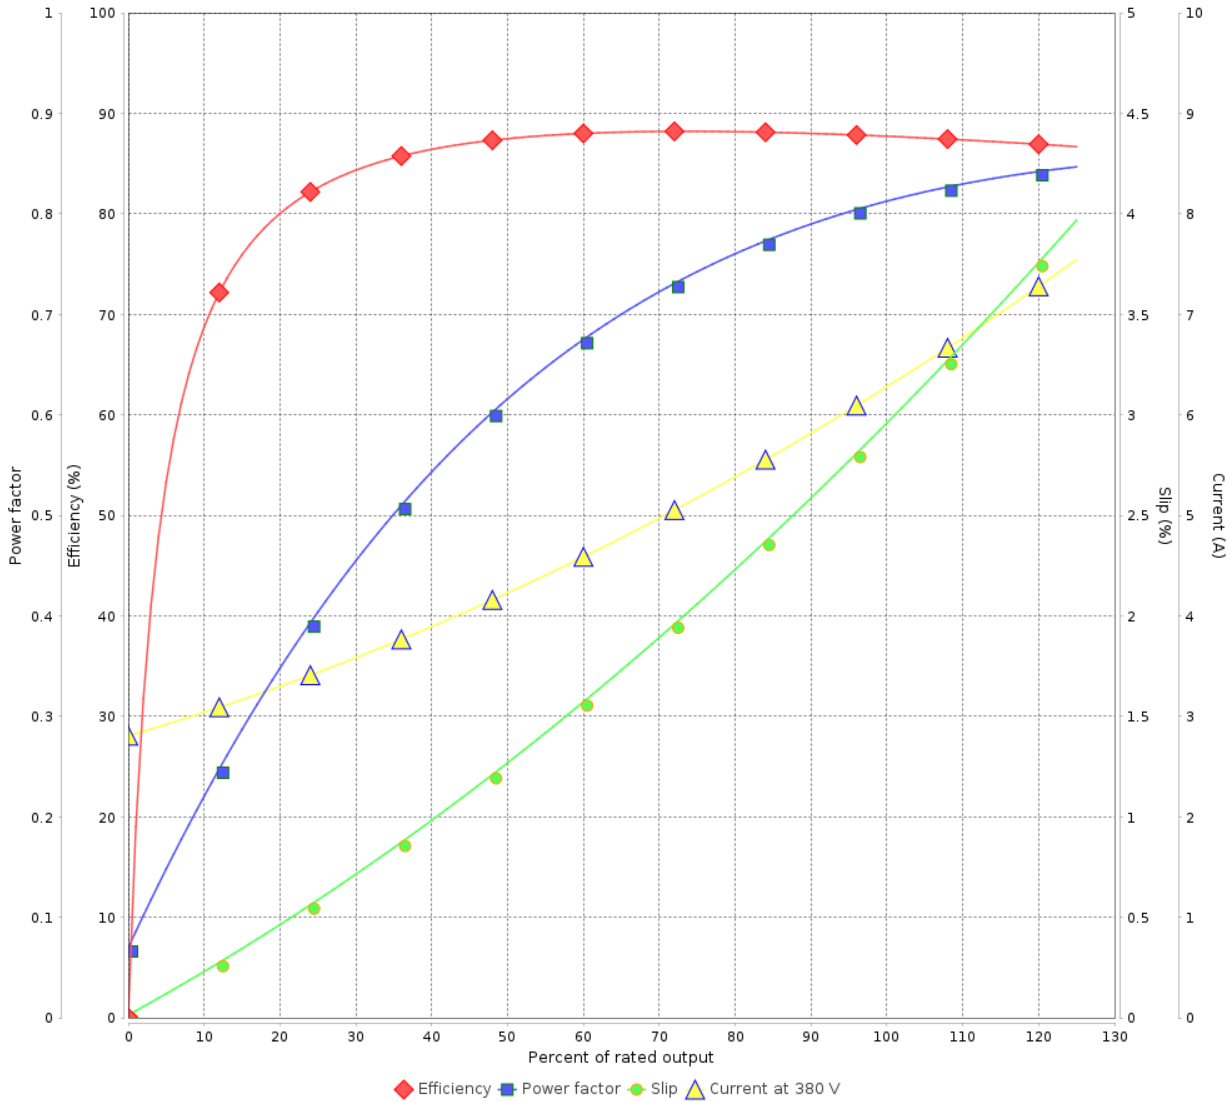

Performance : 380 V 50 Hz 4P IE3

Rated current	: 6.42 A	Moment of inertia (J)	: 0.0169 kgm ²
LRC	: 7.0	Duty cycle	: Cont.(S1)
Rated torque	: 2.00 kgfm	Insulation class	: F
Locked rotor torque	: 229 %	Service factor	: 1.15
Breakdown torque	: 300 %	Temperature rise	: 80 K
Rated speed	: 1455 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by			4 / 9	
Date	13/01/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase

Product code : 11919900

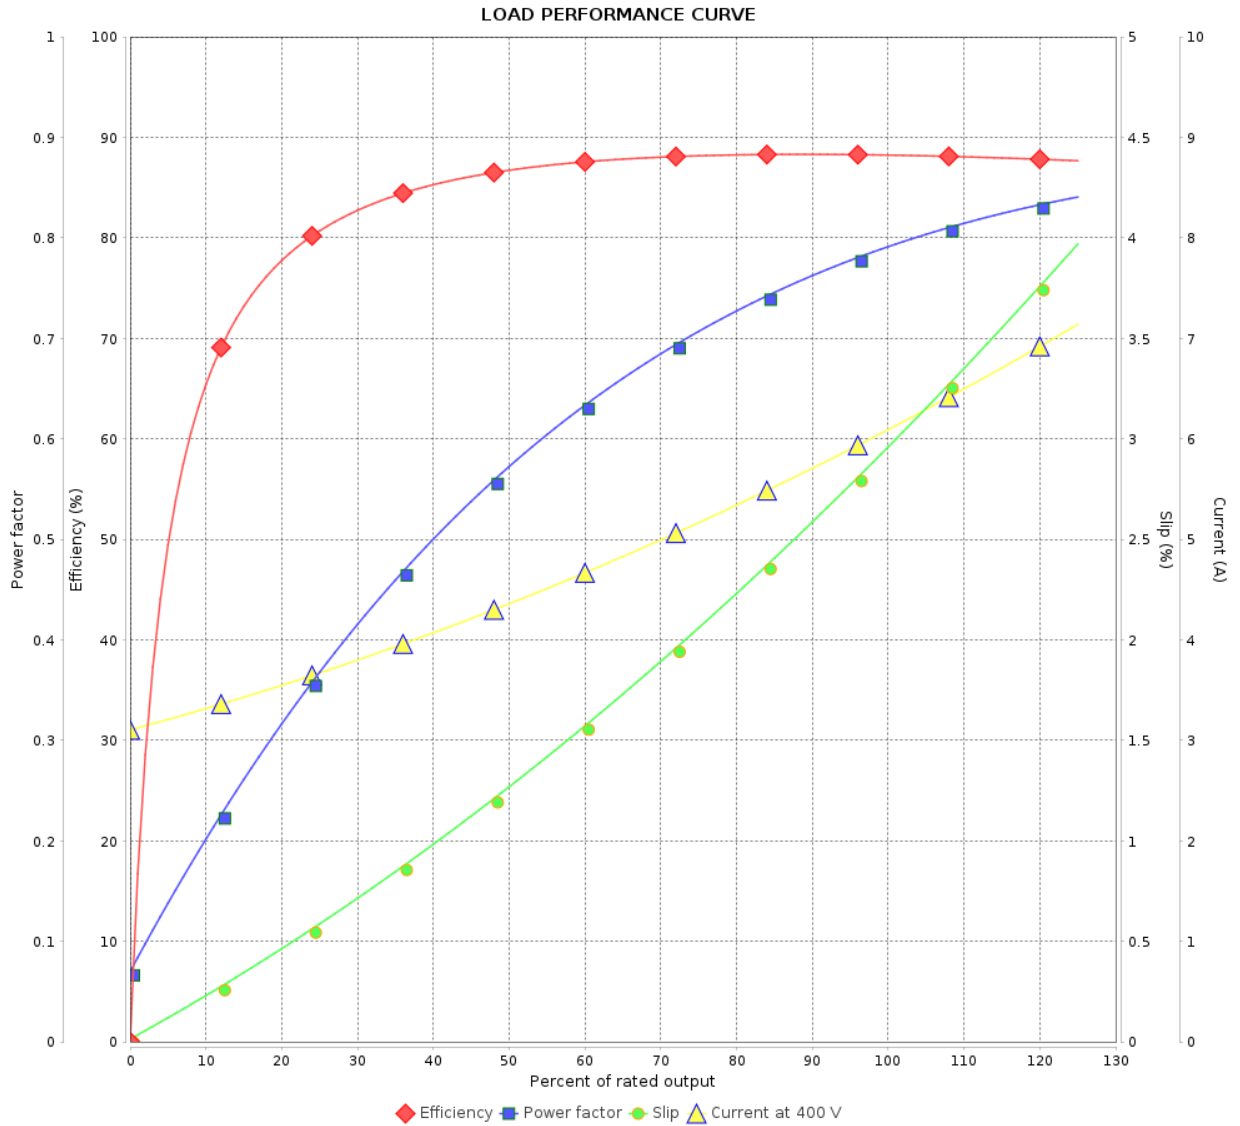

Performance : 400 V 50 Hz 4P IE3

Rated current : 6.21 A
 LRC : 7.7
 Rated torque : 2.00 kgfm
 Locked rotor torque : 260 %
 Breakdown torque : 300 %
 Rated speed : 1455 rpm

Moment of inertia (J) : 0.0169 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase Product code : 11919900

LOAD PERFORMANCE CURVE

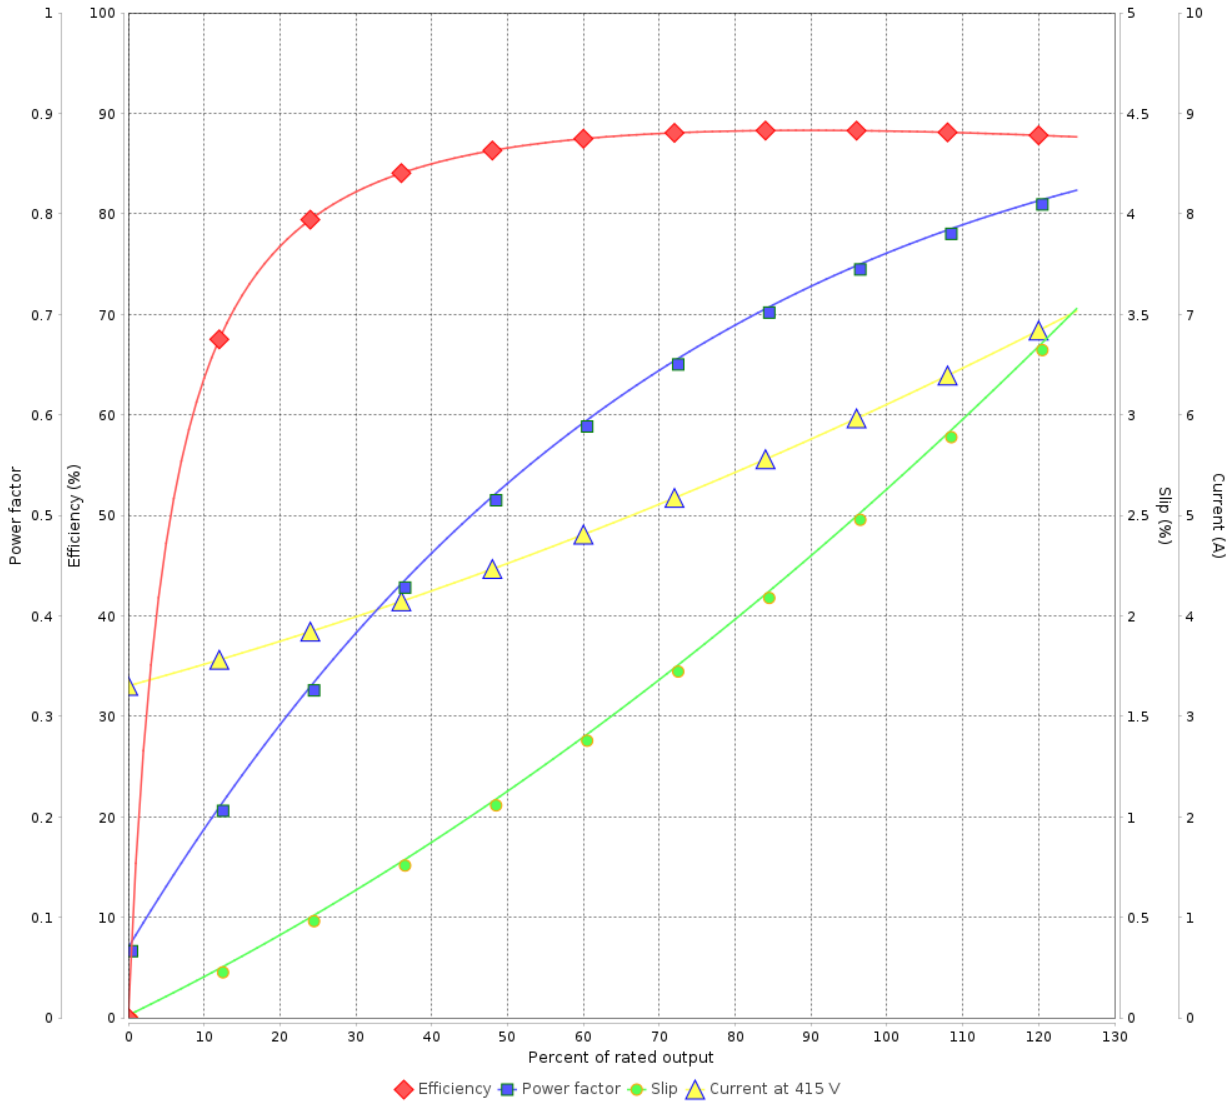

Performance : 415 V 50 Hz 4P IE3

Rated current	: 6.23 A	Moment of inertia (J)	: 0.0169 kgm ²
LRC	: 8.2	Duty cycle	: Cont.(S1)
Rated torque	: 1.99 kgfm	Insulation class	: F
Locked rotor torque	: 290 %	Service factor	: 1.15
Breakdown torque	: 350 %	Temperature rise	: 80 K
Rated speed	: 1460 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		6 / 9		
Date	13/01/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase

Product code : 11919900

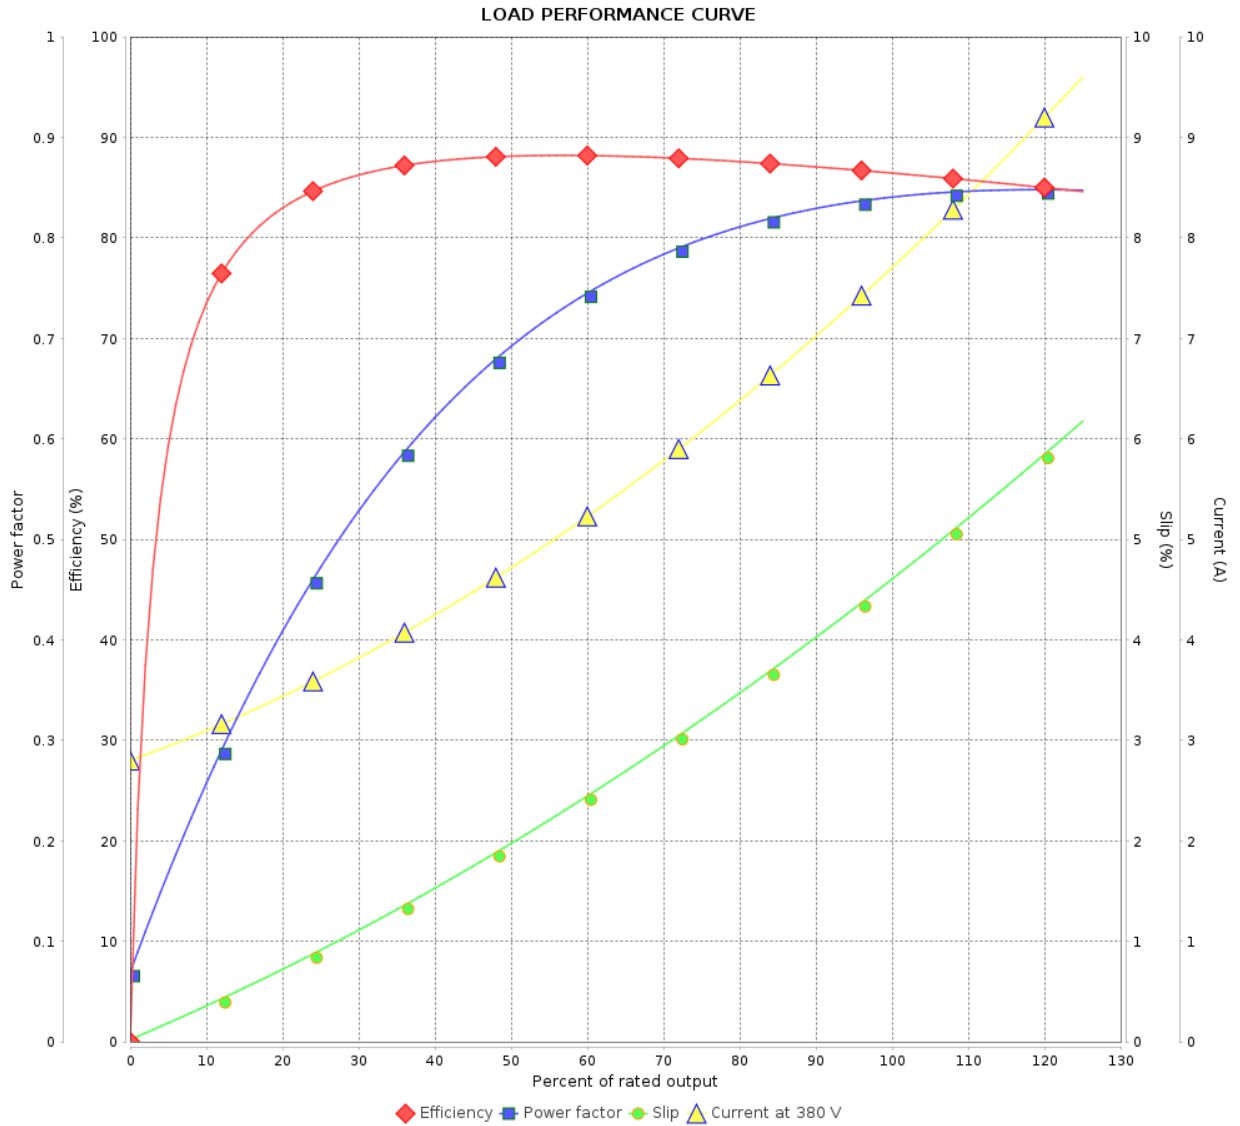

Performance : 380 V 50 Hz 4P IE2

Rated current : 7.74 A
 LRC : 5.8
 Rated torque : 2.54 kgfm
 Locked rotor torque : 185 %
 Breakdown torque : 225 %
 Rated speed : 1430 rpm

Moment of inertia (J) : 0.0169 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date				
		Page	Revision	
		7 / 9		

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase Product code : 11919900

LOAD PERFORMANCE CURVE

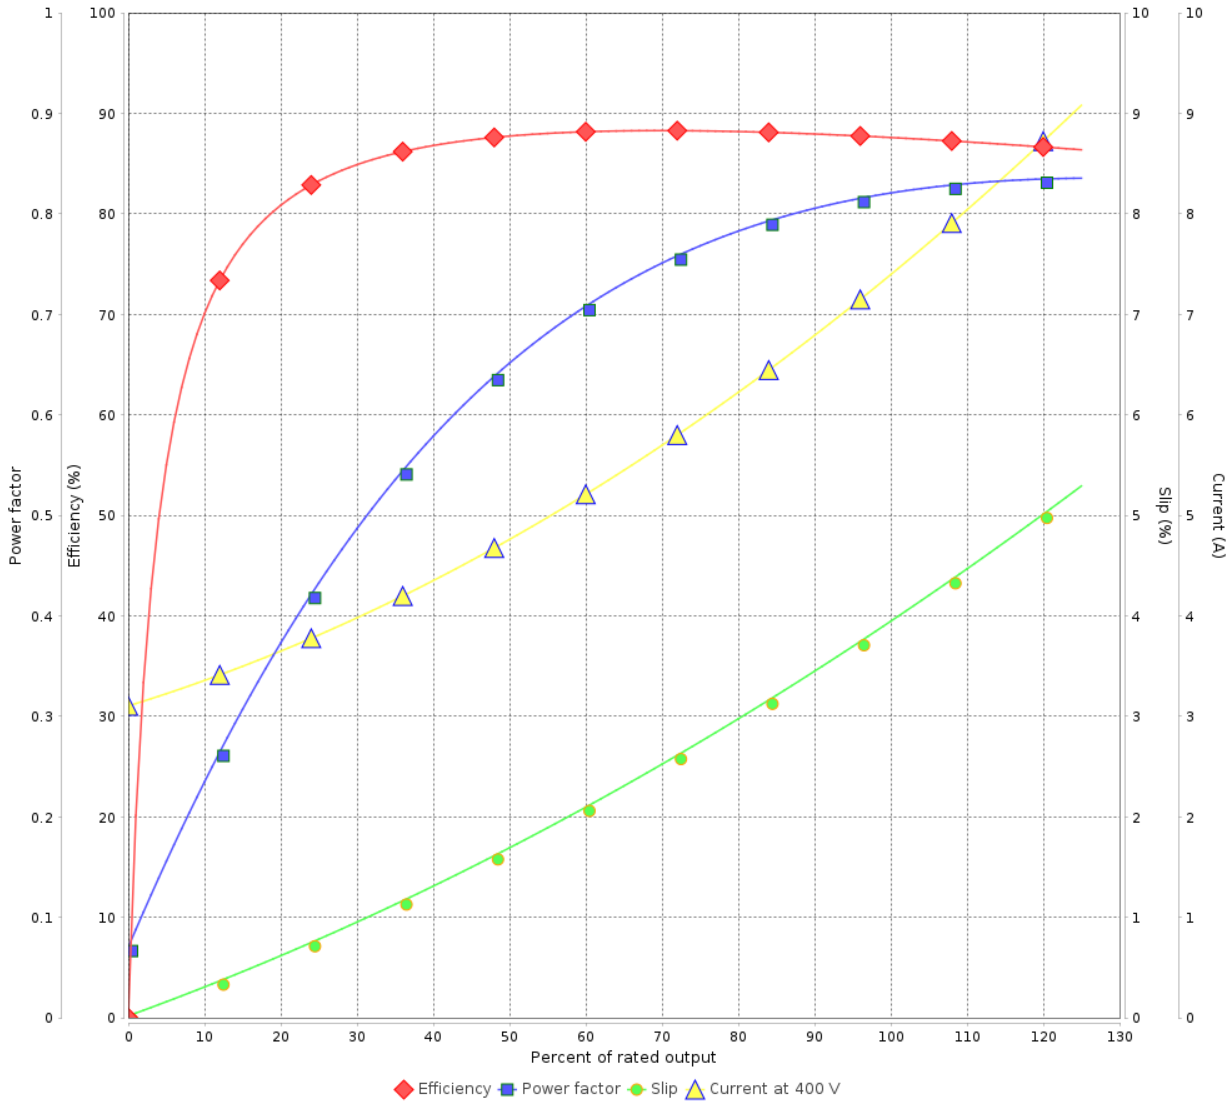

Performance : 400 V 50 Hz 4P IE2

Rated current	: 7.44 A	Moment of inertia (J)	: 0.0169 kgm ²
LRC	: 6.4	Duty cycle	: Cont.(S1)
Rated torque	: 2.52 kgfm	Insulation class	: F
Locked rotor torque	: 210 %	Service factor	: 1.15
Breakdown torque	: 250 %	Temperature rise	: 80 K
Rated speed	: 1440 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		8 / 9		
Date	13/01/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase

Product code : 11919900

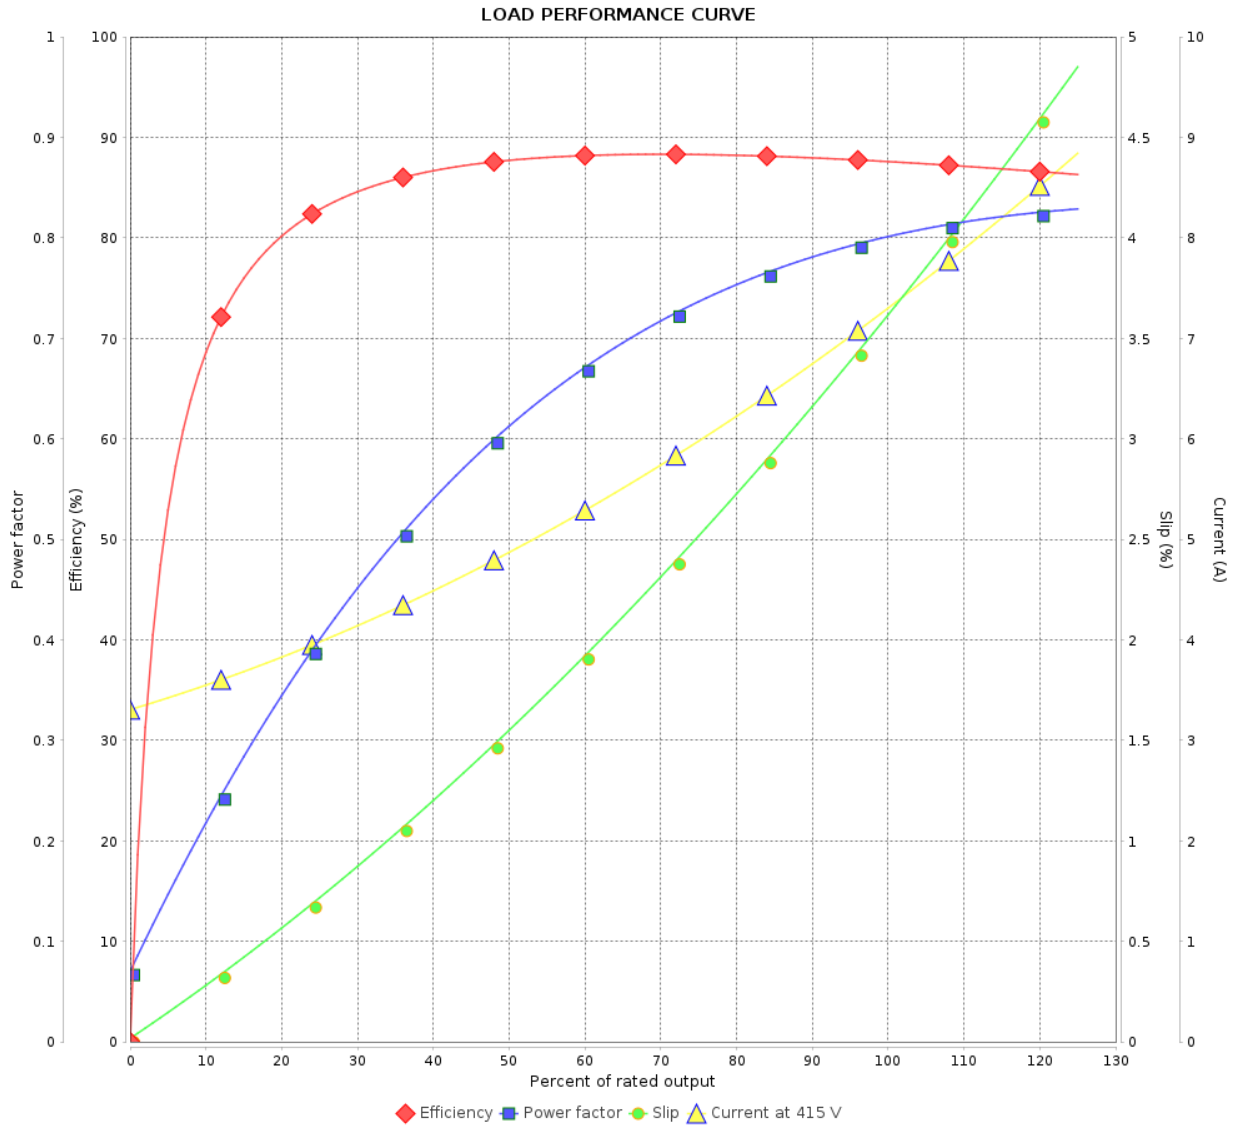

Performance : 415 V 50 Hz 4P IE2

Rated current : 7.35 A
 LRC : 6.9
 Rated torque : 2.51 kgfm
 Locked rotor torque : 229 %
 Breakdown torque : 270 %
 Rated speed : 1445 rpm

Moment of inertia (J) : 0.0169 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				