

# DATA SHEET



## Single Phase Induction Motor - Squirrel Cage

Customer :

Product line : Farm Duty Single-Phase

Product code : 11950656

Frame : B56C  
 Output : 0.33 HP (0.25 kW)  
 Poles : 4  
 Frequency : 60 Hz  
 Rated voltage : 115/230 V  
 Rated current : 5.60/2.80 A  
 L. R. Amperes : 32.5/16.2 A  
 LRC : 5.8x(Code N)  
 No load current : 4.60/2.30 A  
 Rated speed : 1750 rpm  
 Slip : 2.78 %  
 Rated torque : 0.137 kgfm  
 Locked rotor torque : 340 %  
 Breakdown torque : 280 %  
 Insulation class : B  
 Service factor : 1.15  
 Moment of inertia (J) : 0.0026 kgm<sup>2</sup>

Locked rotor time : 10s (cold) 6s (hot)  
 Temperature rise : 80 K  
 Duty cycle : Cont.(S1)  
 Ambient temperature : -20°C to +40°C  
 Altitude : 1000 m.a.s.l.  
 Protection degree : IP55  
 Cooling method : IC411 - TEFC  
 Mounting : F-1  
 Rotation<sup>1</sup> : Both (CW and CCW)  
 Noise level<sup>2</sup> : 55.0 dB(A)  
 Starting method : Direct On Line  
 Approx. weight<sup>3</sup> : 10.7 kg

Output	50%	75%	100%
Efficiency (%)	49.0	58.0	61.0
Power Factor	0.44	0.53	0.62

Foundation loads  
 Max. traction : 7 kgf  
 Max. compression : 17 kgf

	Drive end	Non drive end
Bearing type	6203 ZZ	6202 ZZ
Sealing	V'Ring	V'Ring
Lubrication interval	-	-
Lubricant amount	-	-
Lubricant type	Mobil Polyrex EM	

Notes:

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		1 / 2		
Date	31/01/2024			

# LOAD PERFORMANCE CURVE

Single Phase Induction Motor - Squirrel Cage




Customer : \_\_\_\_\_

Product line : Farm Duty Single-Phase

Product code : 11950656

LOAD PERFORMANCE CURVE

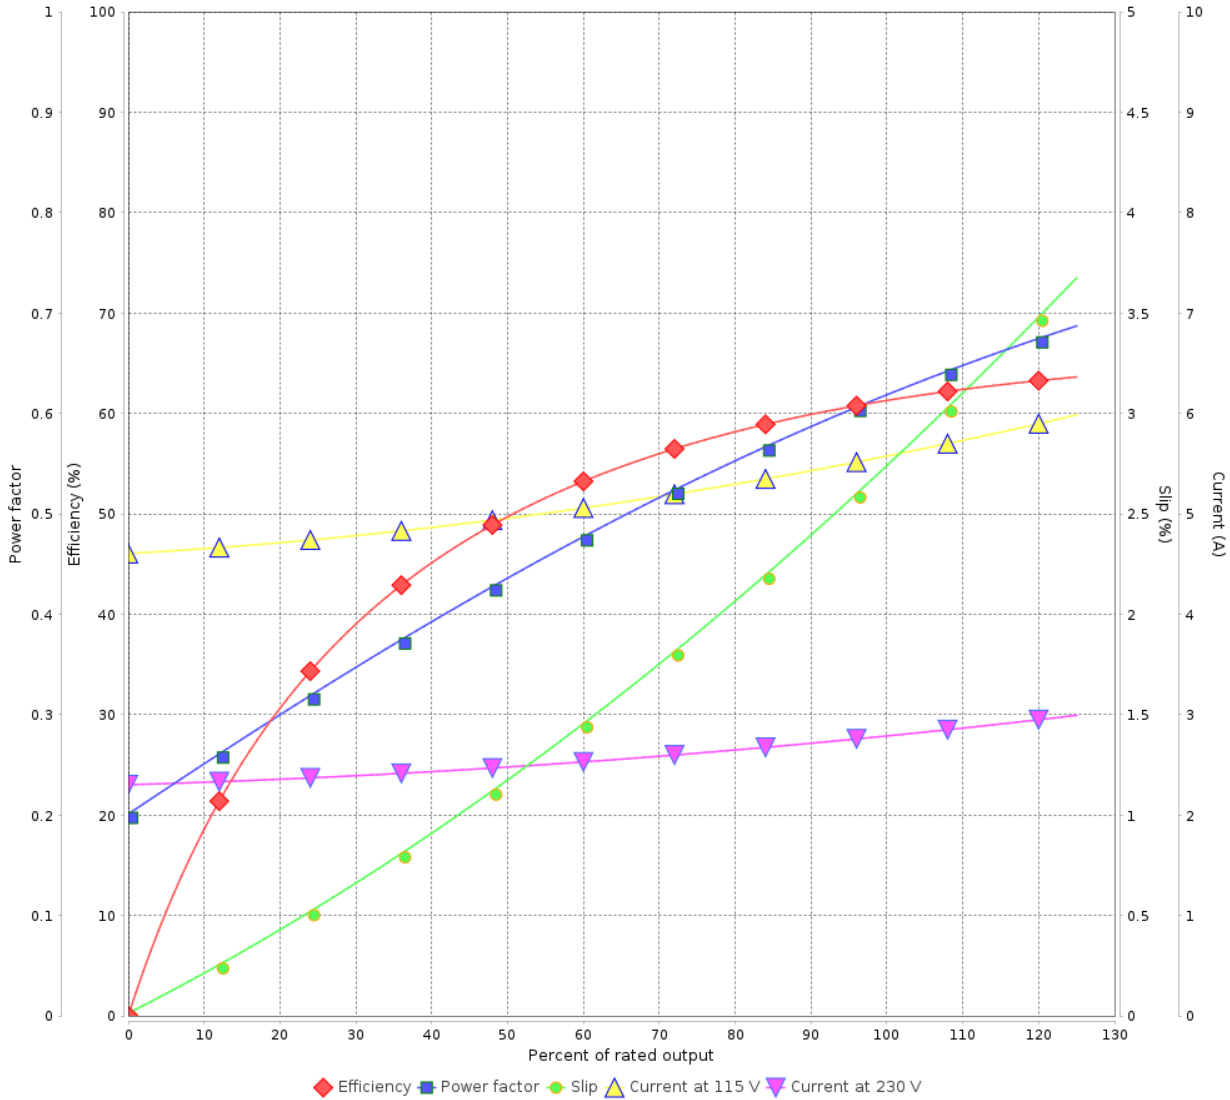

Performance : 115/230 V 60 Hz 4P

Rated current : 5.60/2.80 A  
 LRC : 5.8  
 Rated torque : 0.137 kgfm  
 Locked rotor torque : 340 %  
 Breakdown torque : 280 %  
 Rated speed : 1750 rpm

Moment of inertia (J) : 0.0026 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : B  
 Service factor : 1.15  
 Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	31/01/2024			