

DATA SHEET

Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : Wjet Pump Single-Phase Start Capacitor Product code : 11953261

Frame	: E56J	Locked rotor time	: 10s (cold) 6s (hot)
Output	: 2 HP (1.5 kW)	Temperature rise	: 80 K
Poles	: 2	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 115/208-230 V	Altitude	: 1000 m.a.s.l.
Rated current	: 23.0/11.6-11.5 A	Protection degree	: IP21
L. R. Amperes	: 136/68.4-67.9 A	Cooling method	: IC01 - ODP
LRC	: 5.9x(Code J)	Mounting	: F-1
No load current	: 15.0/6.47-7.50 A	Rotation ¹	: CCW
Rated speed	: 3450 rpm	Vibration	: Not Applicable
Slip	: 4.17 %	Starting method	: Direct On Line
Rated torque	: 0 kgfm	Approx. weight ³	: 17.4 kg
Locked rotor torque	: 160 %	Painting plan	: 207N (ISO 12944 - C2)
Breakdown torque	: 220 %	Color	: Munsell N 1 - Matte
Insulation class	: B		
Service factor	: 1.20		
Moment of inertia (J)	: 0.0185 kgm ²		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	65.0	70.0	70.0	Max. traction	: 22 kgf
Power Factor	0.63	0.73	0.80	Max. compression	: 37 kgf

		<u>Drive end</u>	<u>Non drive end</u>
Bearing type	:	6203 2RS	6203 2RS
Sealing	:	Slinger	Without Bearing Seal
Lubrication interval	:	-	-
Lubricant amount	:	-	-
Lubricant type	:	Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 1 / 2 Revision		
Checked by				
Date	25/09/2026			

LOAD PERFORMANCE CURVE


Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : Wjet Pump Single-Phase Start Capacitor

Product code : 11953261

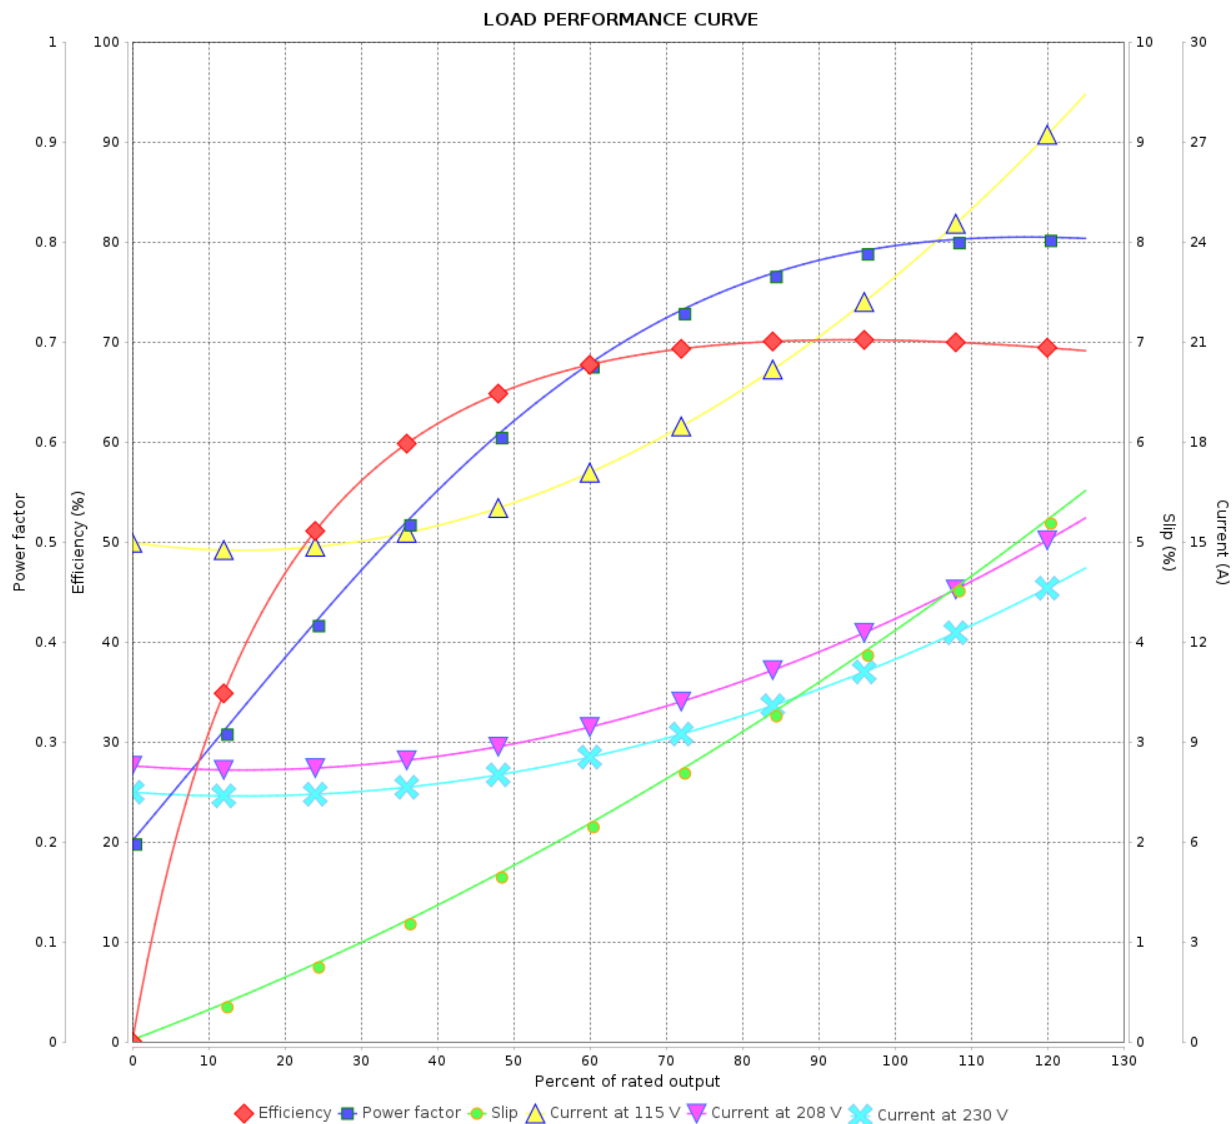

Performance : 115/208-230 V 60 Hz 2P

Rated current : 23.0/11.6-11.5 A
LRC : 5.9
Rated torque : 0 kgfm
Locked rotor torque : 160 %
Breakdown torque : 220 %
Rated speed : 3450 rpm

Moment of inertia (J) : 0.0185 kgm²
Duty cycle : Cont.(S1)
Insulation class : B
Service factor :
Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 2 / 2Revision		
Checked by				
Date	25/09/2026			