

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : W22 NEMA Premium Efficiency Three-Phase      Product code : 11953402

Frame : 143/5TC	Cooling method : IC411 - TEFC
Insulation class : F	Mounting : F-1
Duty cycle : Cont.(S1)	Rotation <sup>1</sup> : Both (CW and CCW)
Ambient temperature : -20°C to +40°C	Starting method : Direct On Line
Altitude : 1000 m.a.s.l.	Approx. weight <sup>3</sup> : 25.9 kg
Protection degree : IP55	Moment of inertia (J) : 0.0026 kgm <sup>2</sup>
Design : B	

Output [HP]	3	2	2	2	3	3	3
Poles	2	2	2	2	2	2	2
Frequency [Hz]	60	50	50	50	50	50	50
Rated voltage [V]	230/460	380	400	415	380	400	415
Rated current [A]	7.42/3.71	3.24	3.17	3.15	4.44	4.26	4.13
L. R. Amperes [A]	60.1/30.1	27.9	29.2	29.9	27.1	28.5	29.3
LRC [A]	8.1x(Code J)	8.6x(Code L)	9.2x(Code M)	9.5x(Code M)	6.1x(Code G)	6.7x(Code H)	7.1x(Code H)
No load current [A]	2.60/1.30	1.28	1.43	1.55	1.28	1.43	1.55
Rated speed [RPM]	3460	2890	2905	2910	2820	2840	2850
Slip [%]	3.89	3.67	3.17	3.00	6.00	5.33	5.00
Rated torque [kgfm]	0.629	0.502	0.500	0.499	0.772	0.767	0.764
Locked rotor torque [%]	330	400	459	490	260	300	320
Breakdown torque [%]	360	400	459	509	260	300	330
Service factor	1.25	1.25	1.00	1.00	1.25	1.00	1.00
Temperature rise	80 K	80 K	80 K	80 K	80 K	80 K	80 K
Locked rotor time	25s (cold) 14s (hot)	25s (cold) 14s (hot)	23s (cold) 13s (hot)	23s (cold) 13s (hot)	25s (cold) 14s (hot)	23s (cold) 13s (hot)	23s (cold) 13s (hot)
Noise level <sup>2</sup>	68.0 dB(A)	62.0 dB(A)	62.0 dB(A)	62.0 dB(A)	62.0 dB(A)	62.0 dB(A)	62.0 dB(A)
Efficiency (%)	25%						
	50%	85.5	81.9	82.0	82.2	84.0	84.5
	75%	86.5	84.0	84.4	84.8	85.0	85.5
	100%	86.5	84.8	85.3	85.9	84.6	85.6
Power Factor	25%						
	50%	0.70	0.63	0.58	0.55	0.76	0.72
	75%	0.81	0.76	0.72	0.69	0.85	0.82
	100%	0.86	0.83	0.80	0.77	0.89	0.87

Losses at normative operating points (speed;torque), in percentage of rated output power

Losses (%)	P1 (0,9;1,0)	14.8	14.8	14.8	14.8	14.8	14.8
	P2 (0,5;1,0)	12.3	12.3	12.3	12.3	12.3	12.3
	P3 (0,25;1,0)	11.7	11.7	11.7	11.7	11.7	11.7
	P4 (0,9;0,5)	6.8	6.8	6.8	6.8	6.8	6.8
	P5 (0,5;0,5)	4.3	4.3	4.3	4.3	4.3	4.3
	P6 (0,5;0,25)	2.6	2.6	2.6	2.6	2.6	2.6
	P7 (0,25;0,25)	1.7	1.7	1.7	1.7	1.7	1.7

Bearing type : Sealing : Lubrication interval : Lubricant amount : Lubricant type :	Drive end	6205 ZZ	Non drive end	6204 ZZ	Foundation loads Max. traction : 59 kgf Max. compression : 85 kgf
		V'Ring		V'Ring	
		-		-	
		-		-	
		Mobil Polyrex EM			

This revision replaces and cancel the previous one, which must be eliminated.

(1) Looking the motor from the shaft end.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	25/04/2024		1 / 9	

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Notes

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	25/04/2024		2 / 9	

# LOAD PERFORMANCE CURVE


## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11953402

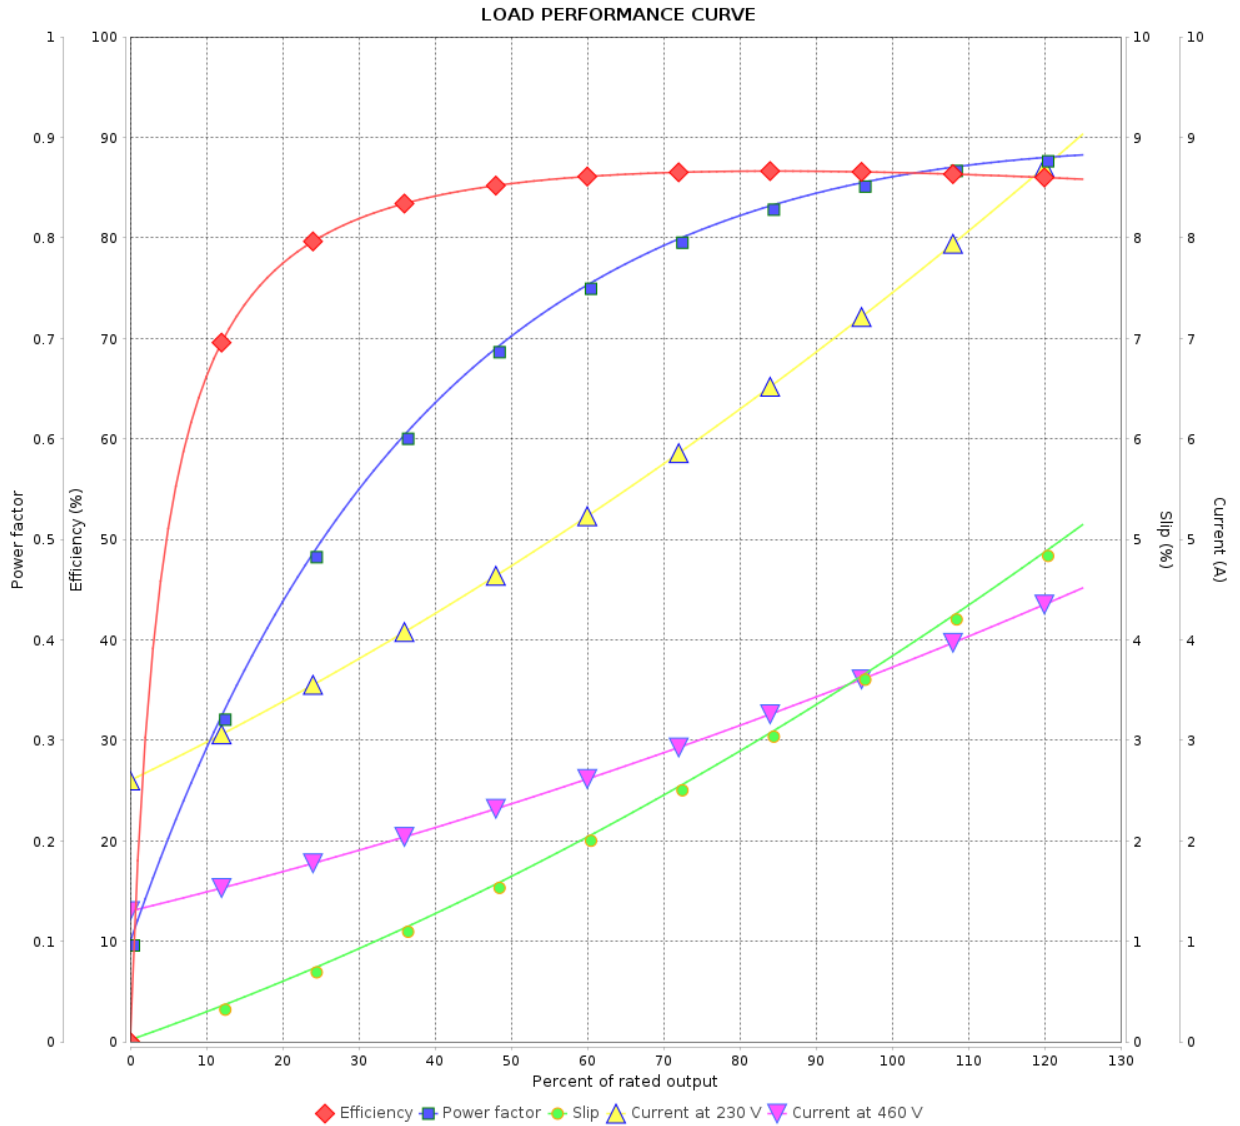

Performance : 230/460 V 60 Hz 2P

Rated current : 7.42/3.71 A  
 LRC : 8.1  
 Rated torque : 0.629 kgfm  
 Locked rotor torque : 330 %  
 Breakdown torque : 360 %  
 Rated speed : 3460 rpm

Moment of inertia (J) : 0.0026 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.25  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11953402

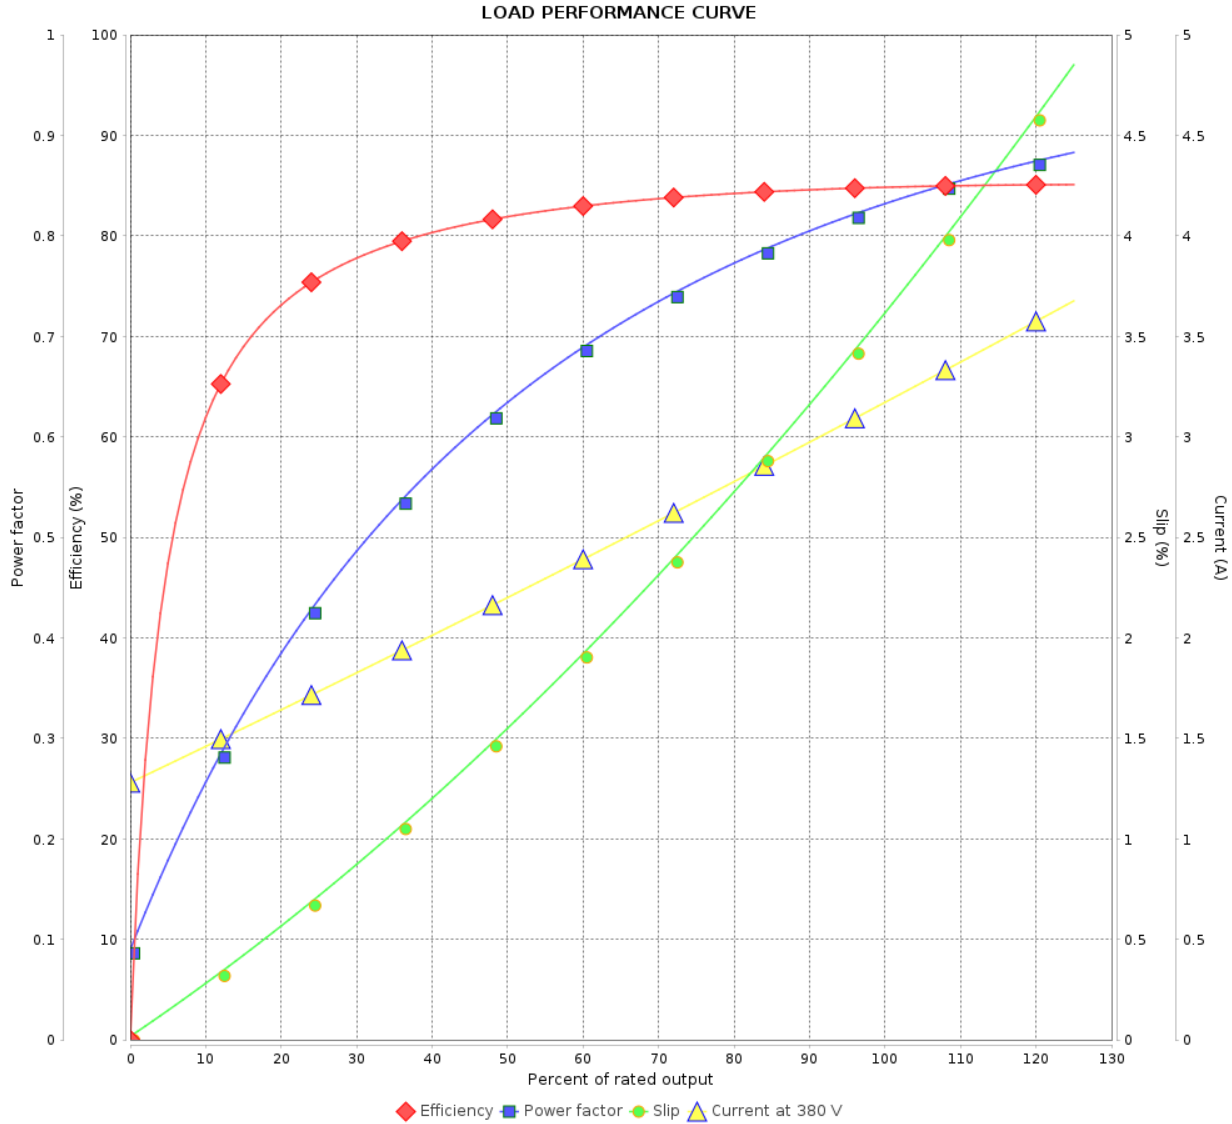

Performance : 380 V 50 Hz 2P IE3

Rated current : 3.24 A  
 LRC : 8.6  
 Rated torque : 0.502 kgfm  
 Locked rotor torque : 400 %  
 Breakdown torque : 400 %  
 Rated speed : 2890 rpm

Moment of inertia (J) : 0.0026 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.25  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 4 / 9	Revision
Checked by				
Date	25/04/2024			

# LOAD PERFORMANCE CURVE


## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11953402

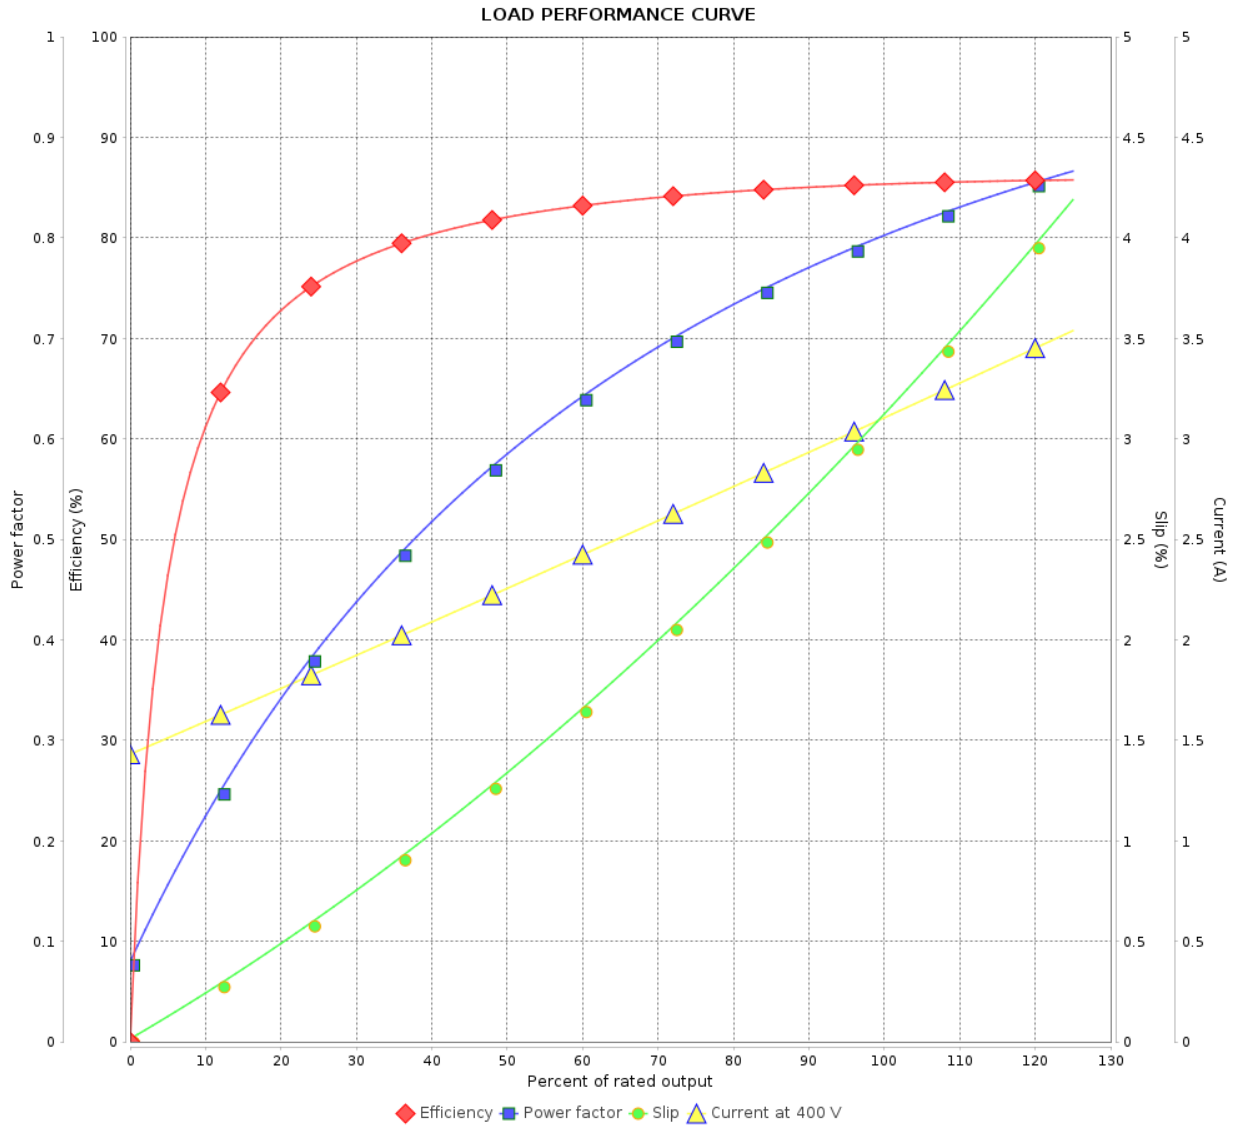

Performance : 400 V 50 Hz 2P IE3

Rated current : 3.17 A  
 LRC : 9.2  
 Rated torque : 0.500 kgfm  
 Locked rotor torque : 459 %  
 Breakdown torque : 459 %  
 Rated speed : 2905 rpm

Moment of inertia (J) : 0.0026 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.00  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11953402

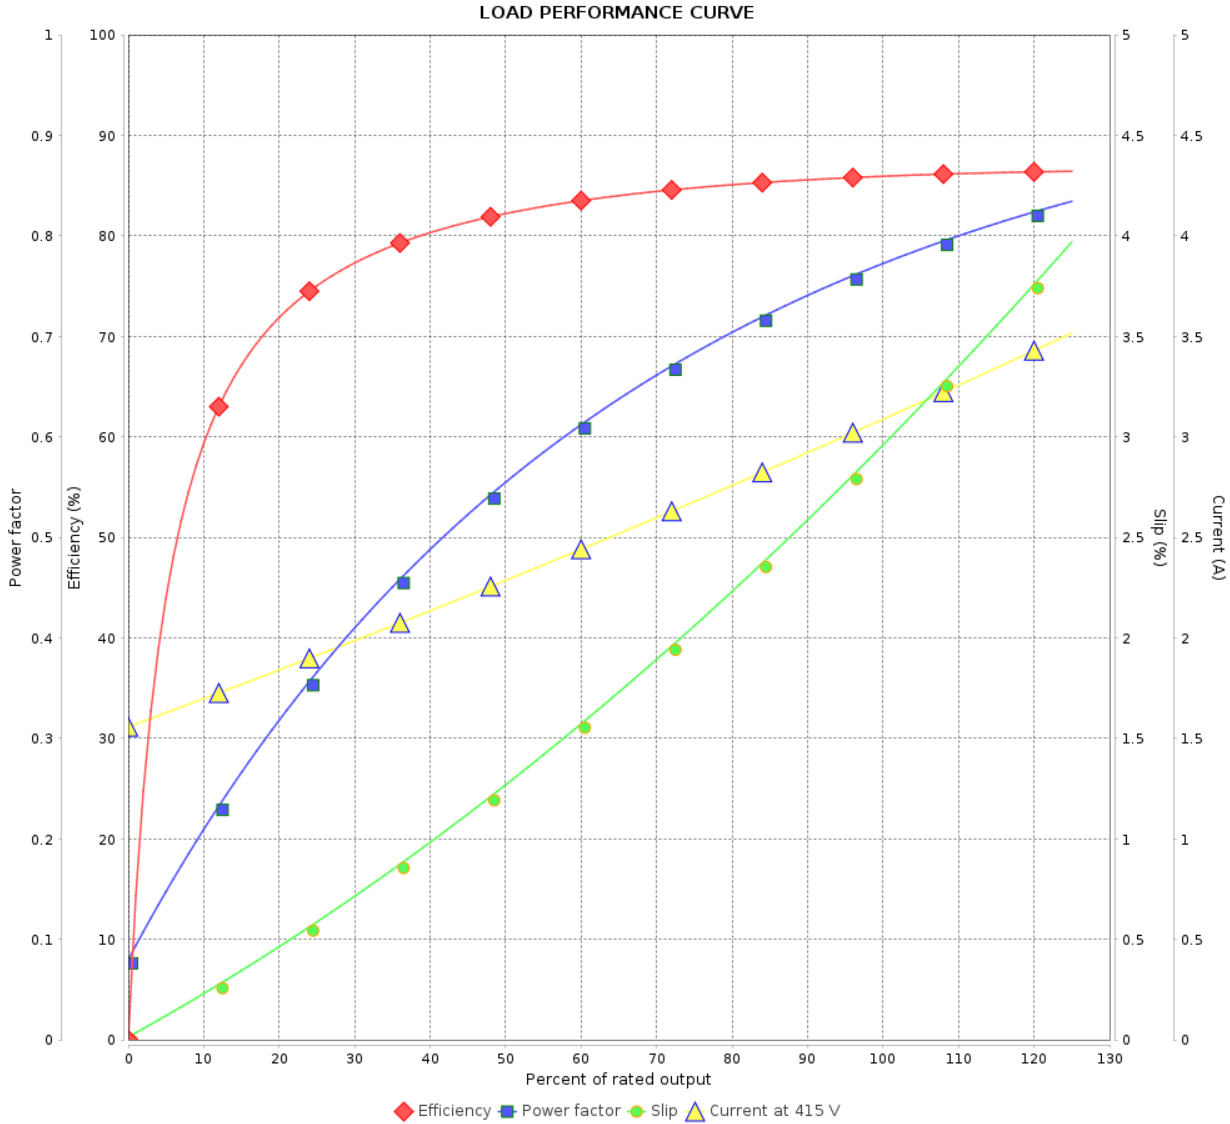

Performance : 415 V 50 Hz 2P IE3

Rated current : 3.15 A  
 LRC : 9.5  
 Rated torque : 0.499 kgfm  
 Locked rotor torque : 490 %  
 Breakdown torque : 509 %  
 Rated speed : 2910 rpm

Moment of inertia (J) : 0.0026 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.00  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

# LOAD PERFORMANCE CURVE


## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11953402

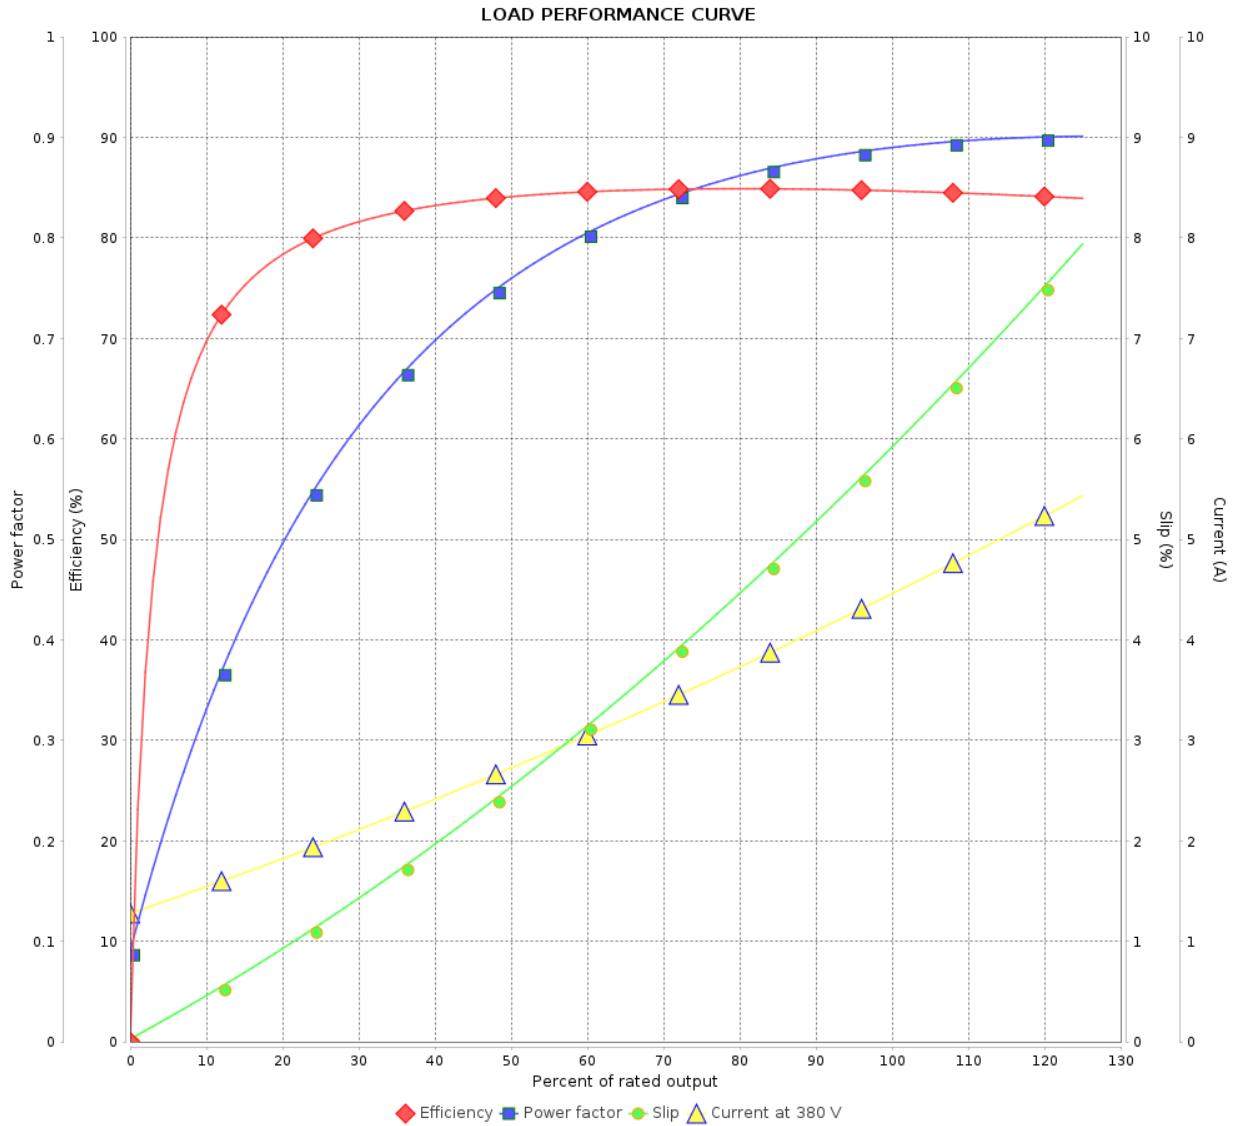

Performance : 380 V 50 Hz 2P IE2

Rated current : 4.44 A  
 LRC : 6.1  
 Rated torque : 0.772 kgfm  
 Locked rotor torque : 260 %  
 Breakdown torque : 260 %  
 Rated speed : 2820 rpm

Moment of inertia (J) : 0.0026 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.25  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11953402

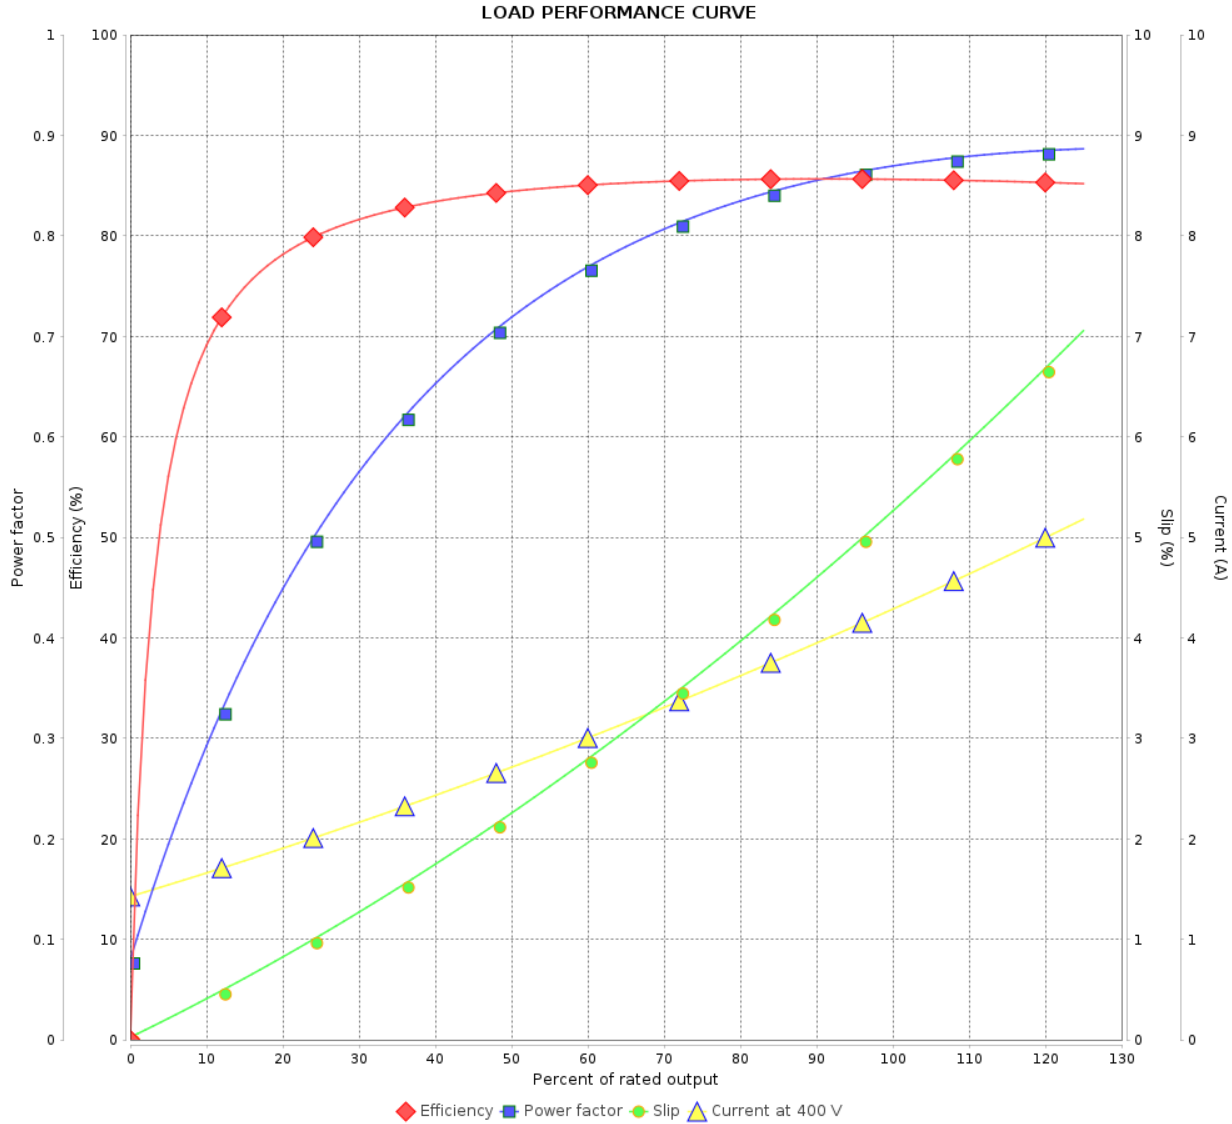

Performance : 400 V 50 Hz 2P IE2

Rated current : 4.26 A  
 LRC : 6.7  
 Rated torque : 0.767 kgfm  
 Locked rotor torque : 300 %  
 Breakdown torque : 300 %  
 Rated speed : 2840 rpm

Moment of inertia (J) : 0.0026 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.00  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				



# LOAD PERFORMANCE CURVE


## Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11953402

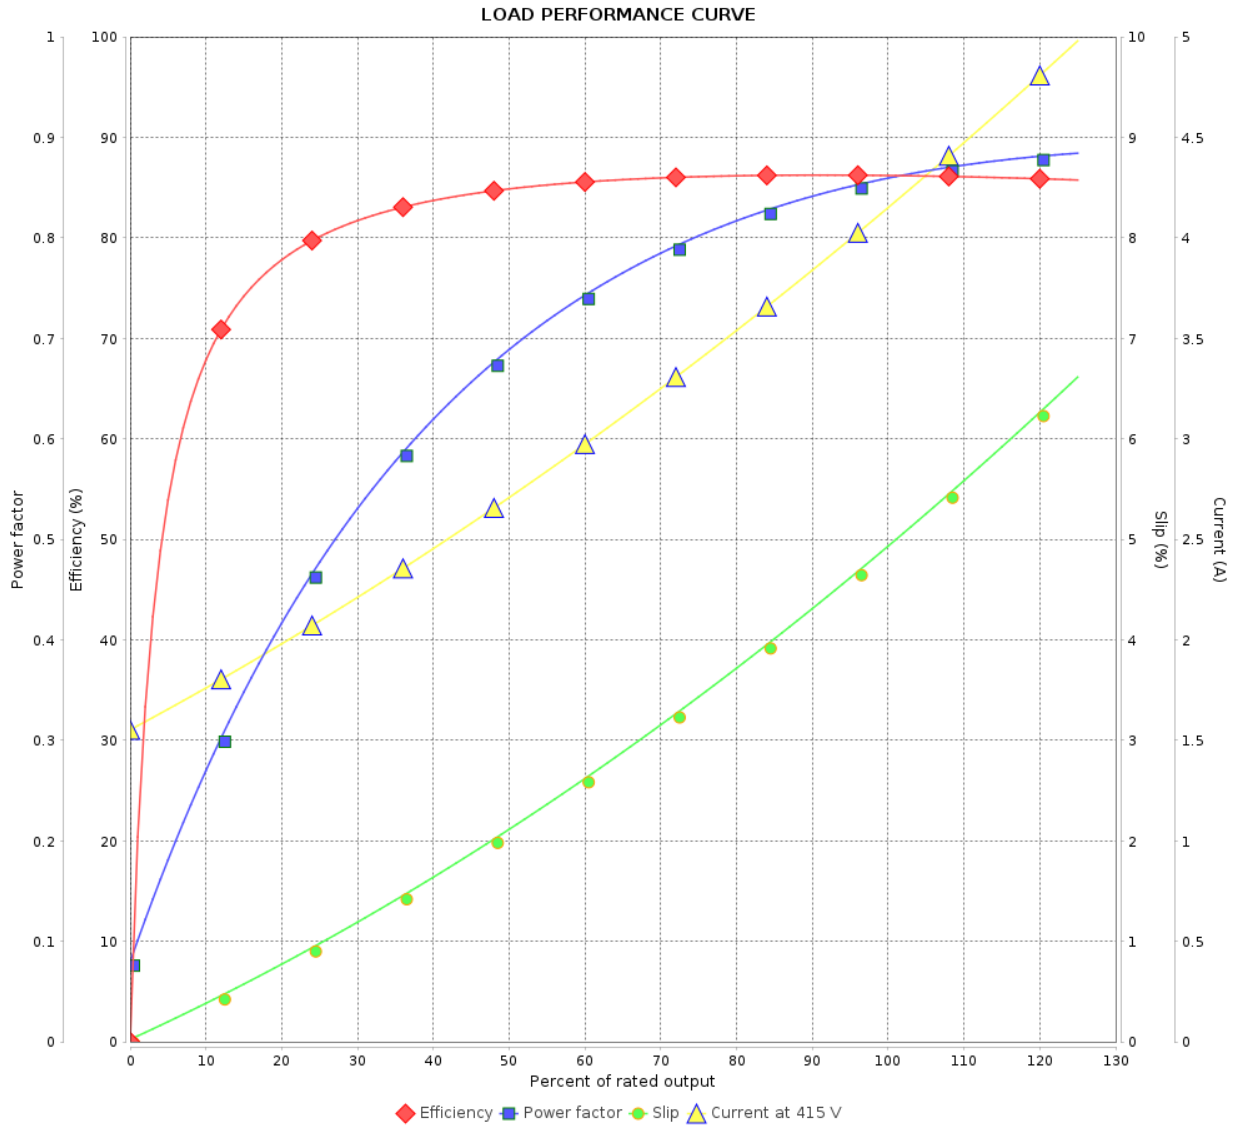

Performance : 415 V 50 Hz 2P IE3

Rated current : 4.13 A  
 LRC : 7.1  
 Rated torque : 0.764 kgfm  
 Locked rotor torque : 320 %  
 Breakdown torque : 330 %  
 Rated speed : 2850 rpm

Moment of inertia (J) : 0.0026 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.00  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date				
		Page	Revision	
		9 / 9		