

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



| | | | | | | |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-------------------------------------------|--------------|--------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------|
| Customer : | | | | | | |
| Product line | | : W22 NEMA Premium Efficiency Three-Phase | | Product code : | | 11991000 |
| Frame | : | 213/5TC | | Locked rotor time | : | 102s (cold) 57s (hot) |
| Output | : | 5 HP (3.7 kW) | | Temperature rise | : | 80 K |
| Poles | : | 6 | | Duty cycle | : | Cont.(S1) |
| Frequency | : | 60 Hz | | Ambient temperature | : | -20°C to +40°C |
| Rated voltage | : | 575 V | | Altitude | : | 1000 m.a.s.l. |
| Rated current | : | 5.46 A | | Protection degree | : | IP55 |
| L. R. Amperes | : | 37.2 A | | Cooling method | : | IC411 - TEFC |
| LRC | : | 6.8x(Code J) | | Mounting | : | F-1 |
| No load current | : | 2.76 A | | Rotation ¹ | : | Both (CW and CCW) |
| Rated speed | : | 1170 rpm | | Noise level ² | : | 55.0 dB(A) |
| Slip | : | 2.50 % | | Starting method | : | Direct On Line |
| Rated torque | : | 3.10 kgfm | | Approx. weight ³ | : | 78.7 kg |
| Locked rotor torque | : | 170 % | | | | |
| Breakdown torque | : | 260 % | | | | |
| Insulation class | : | F | | | | |
| Service factor | : | 1.25 | | | | |
| Moment of inertia (J) | : | 0.0620 kgm ² | | | | |
| Design | : | B | | | | |
| Output | 50% | 75% | 100% | Foundation loads | | |
| Efficiency (%) | 88.5 | 89.5 | 89.5 | Max. traction | : | 110 kgf |
| Power Factor | 0.58 | 0.70 | 0.76 | Max. compression | : | 188 kgf |
| Losses at normative operating points (speed;torque), in percentage of rated output power | | | | | | |
| P1 (0,9;1,0) | P2 (0,5;1,0) | P3 (0,25;1,0) | P4 (0,9;0,5) | P5 (0,5;0,5) | P6 (0,5;0,25) | P7 (0,25;0,25) |
| 11.1 | 9.1 | 8.8 | 5.8 | 4.0 | 2.9 | 2.1 |
| | | <u>Drive end</u> | | <u>Non drive end</u> | | |
| Bearing type | : | 6308 ZZ | | 6207 ZZ | | |
| Sealing | : | V'Ring | | V'Ring | | |
| Lubrication interval | : | - | | - | | |
| Lubricant amount | : | - | | - | | |
| Lubricant type | : | Mobil Polyrex EM | | | | |
| Notes | | | | | | |
| This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load. | | | | These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1. | | |
| Rev. | Changes Summary | | | Performed | Checked | Date |
| Performed by | | | | | | |
| Checked by | | | | | Page | Revision |
| Date | 26/07/2024 | | | | 1 / 2 | |

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 11991000

LOAD PERFORMANCE CURVE

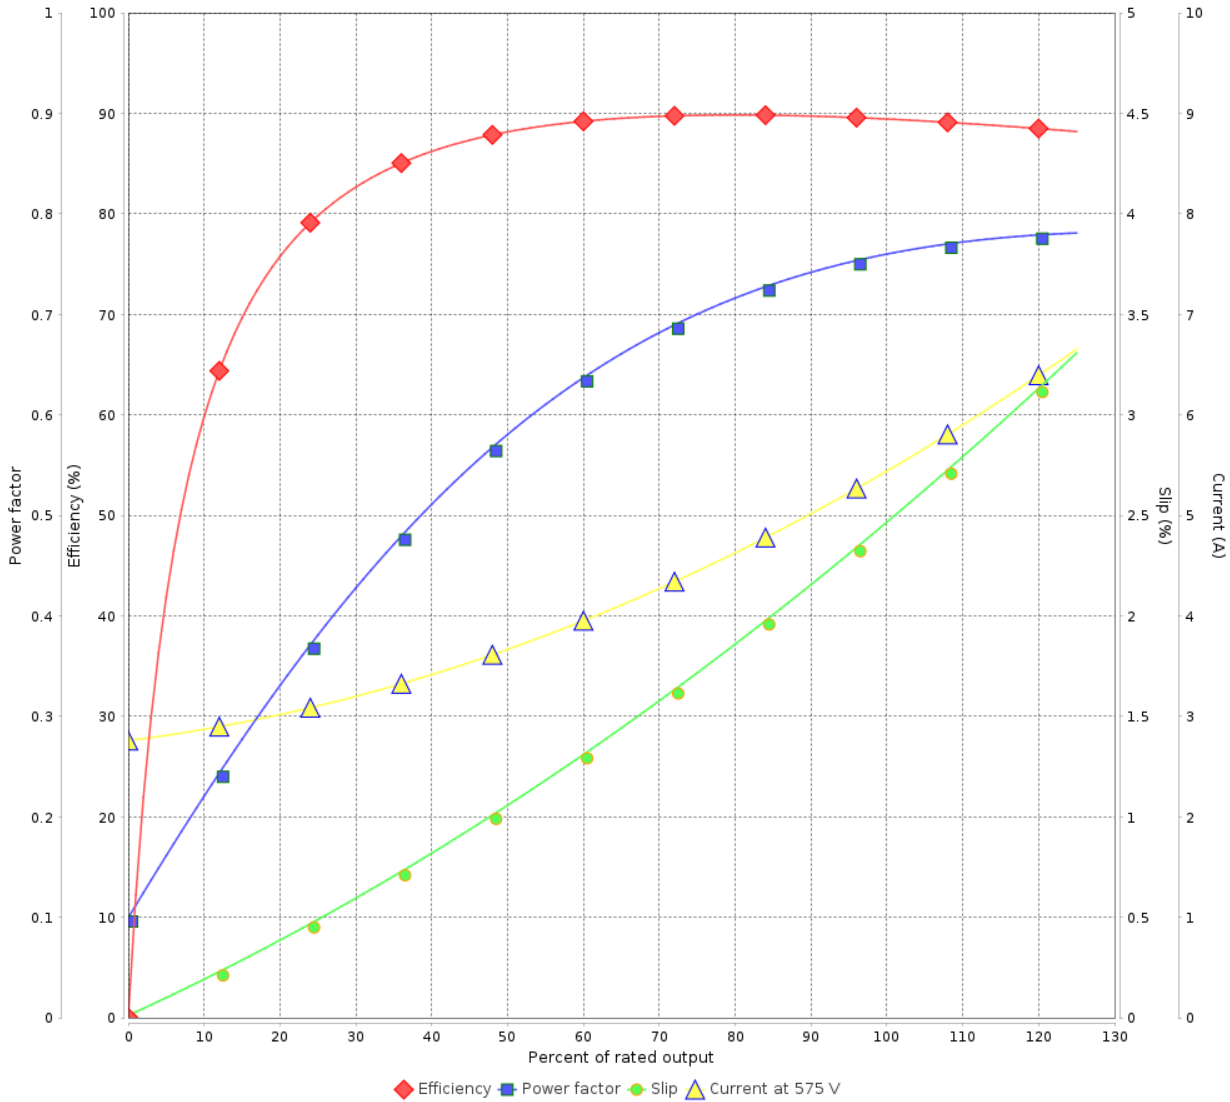

Performance : 575 V 60 Hz 6P

| | | | |
|---------------------|-------------|-----------------------|---------------------------|
| Rated current | : 5.46 A | Moment of inertia (J) | : 0.0620 kgm ² |
| LRC | : 6.8 | Duty cycle | : Cont.(S1) |
| Rated torque | : 3.10 kgfm | Insulation class | : F |
| Locked rotor torque | : 170 % | Service factor | : 1.25 |
| Breakdown torque | : 260 % | Temperature rise | : 80 K |
| Rated speed | : 1170 rpm | Design | : B |

| Rev. | Changes Summary | Performed | Checked | Date |
|--------------|-----------------|-----------|---------------|----------|
| | | | | |
| Performed by | | | Page 2 / 2 | Revision |
| Checked by | | | | |
| Date | 26/07/2024 | | | |