

DATA SHEET



Single Phase Induction Motor - Squirrel Cage

Customer :

Product line : Farm Duty Single-Phase

Product code : 11994229

Frame	: 215TC	Locked rotor time	: 10s (cold) 6s (hot)
Output	: 7.5 HP (5.5 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 230 V	Altitude	: 1000 m.a.s.l.
Rated current	: 33.0 A	Protection degree	: IP55
L. R. Amperes	: 248 A	Cooling method	: IC411 - TEFC
LRC	: 7.5x(Code J)	Mounting	: F-1
No load current	: 16.9 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 1730 rpm	Starting method	: Direct On Line
Slip	: 3.89 %	Approx. weight ³	: 74.0 kg
Rated torque	: 3.15 kgfm		
Locked rotor torque	: 400 %		
Breakdown torque	: 260 %		
Insulation class	: F		
Service factor	: 1.15		
Moment of inertia (J)	: 0.0372 kgm ²		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	77.0	81.0	83.0	Max. traction	: 114 kgf
Power Factor	0.71	0.81	0.90	Max. compression	: 188 kgf

		<u>Drive end</u>	<u>Non drive end</u>
Bearing type	:	6308 ZZ	6206 ZZ
Sealing	:	V'Ring	V'Ring
Lubrication interval	:	-	-
Lubricant amount	:	-	-
Lubricant type	:	Mobil Polyrex EM	

Notes:

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	31/01/2024		1 / 2	

LOAD PERFORMANCE CURVE

Single Phase Induction Motor - Squirrel Cage




Customer :

Product line : Farm Duty Single-Phase

Product code : 11994229

LOAD PERFORMANCE CURVE

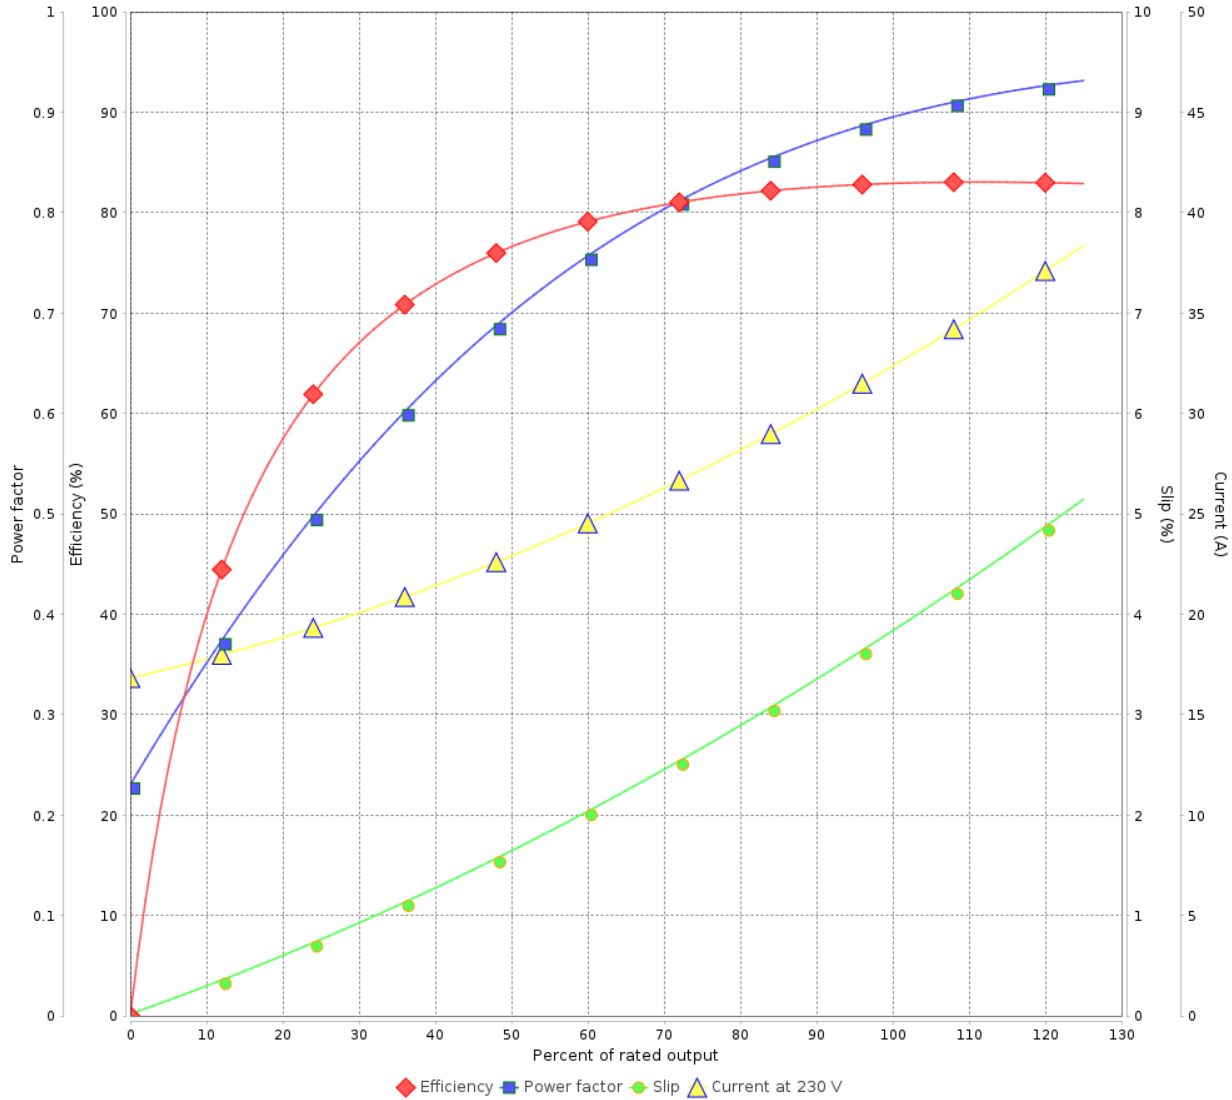

Performance : 230 V 60 Hz 4P

Rated current : 33.0 A
 LRC : 7.5
 Rated torque : 3.15 kgfm
 Locked rotor torque : 400 %
 Breakdown torque : 260 %
 Rated speed : 1730 rpm

Moment of inertia (J) : 0.0372 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	31/01/2024			