

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : General High Efficiency Three-Phase Product code : 11994480

Frame	: E143/5TC	Locked rotor time	: 27s (cold) 15s (hot)
Output	: 2 HP (1.5 kW)	Temperature rise	: 80 K
Poles	: 2	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 230/460 V	Altitude	: 1000 m.a.s.l.
Rated current	: 5.00/2.50 A	Protection degree	: IP21
L. R. Amperes	: 45.0/22.5 A	Cooling method	: IC01 - ODP
LRC	: 9.0x(Code K)	Mounting	: F-1
No load current	: 2.00/1.00 A	Rotation <sup>1</sup>	: Both (CW and CCW)
Rated speed	: 3430 rpm	Noise level <sup>2</sup>	: 60.0 dB(A)
Slip	: 4.72 %	Starting method	: Direct On Line
Rated torque	: 0.423 kgfm	Approx. weight <sup>3</sup>	: 0.0 kg
Locked rotor torque	: 450 %		
Breakdown torque	: 350 %		
Insulation class	: F		
Service factor	: 1.15		
Moment of inertia (J)	: 0.0025 kgm <sup>2</sup>		
Design	: B		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	84.0	85.5	85.5	Max. traction	: 42 kgf
Power Factor	0.73	0.83	0.88	Max. compression	: 42 kgf

	Drive end	Non drive end
Bearing type	: 6205 ZZ	: 6204 ZZ
Sealing	: Without Bearing Seal	: Without Bearing Seal
Lubrication interval	: -	: -
Lubricant amount	: -	: -
Lubricant type	: Mobil Polyrex EM	

Notes  
USABLE @208V 5.50A SF 1.00 SFA 5.50A

This revision replaces and cancel the previous one, which must be eliminated.  
(1) Looking the motor from the shaft end.  
(2) Measured at 1m and with tolerance of +3dB(A).  
(3) Approximate weight subject to changes after manufacturing process.  
(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date	14/07/2025		Page 1 / 2	Revision

# LOAD PERFORMANCE CURVE


## Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : General High Efficiency Three-Phase

Product code : 11994480

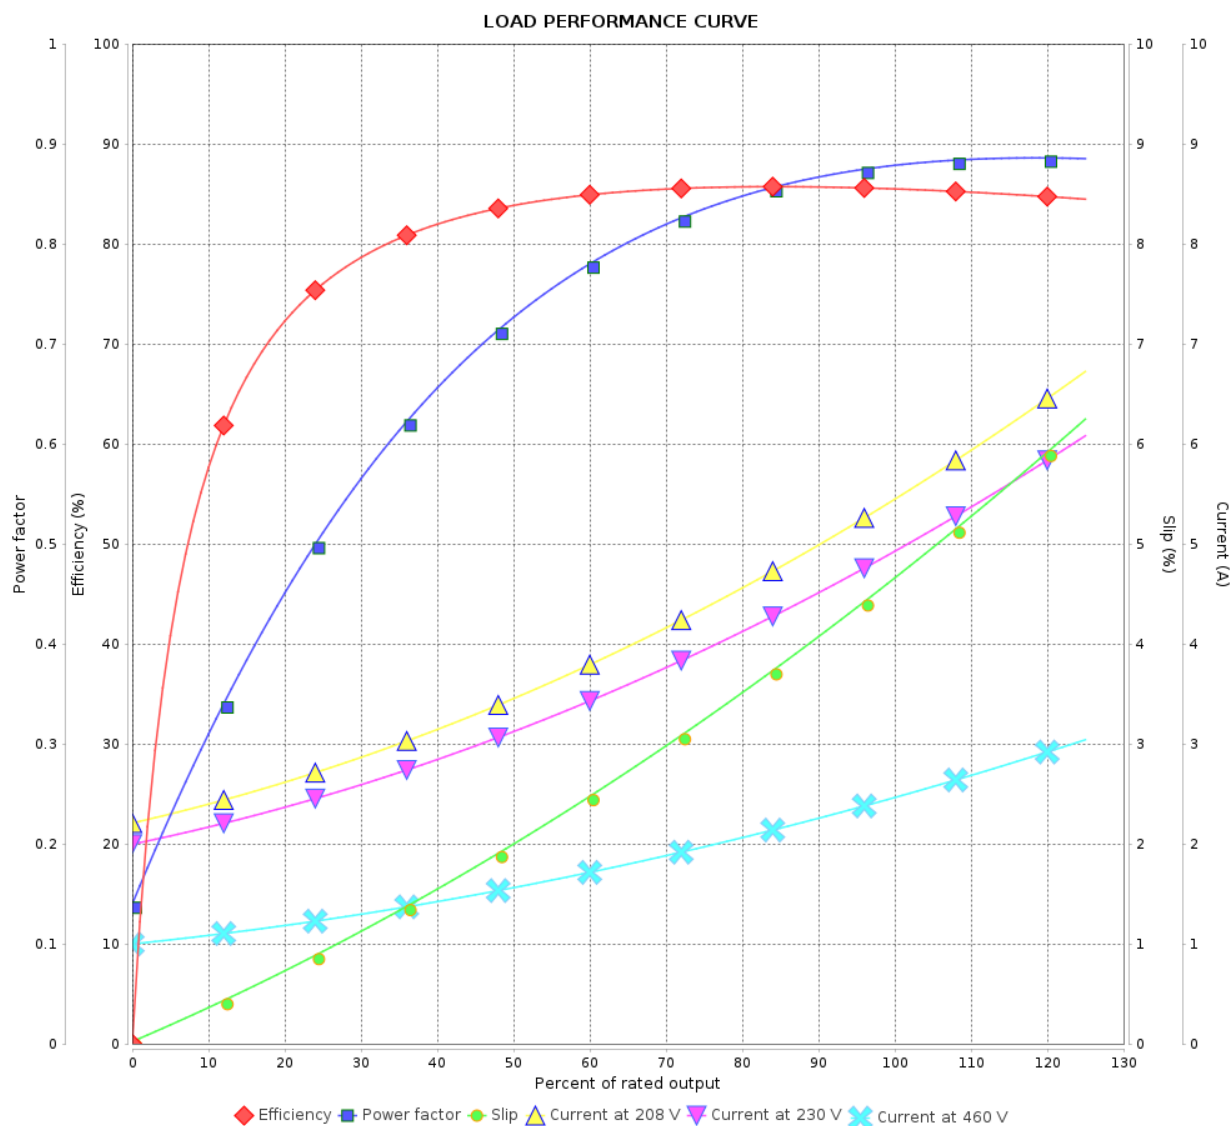

Performance : 230/460 V 60 Hz 2P

Rated current : 5.00/2.50 A  
LRC : 9.0  
Rated torque : 0.423 kgfm  
Locked rotor torque : 450 %  
Breakdown torque : 350 %  
Rated speed : 3430 rpm

Moment of inertia (J) : 0.0025 kgm<sup>2</sup>  
Duty cycle : Cont.(S1)  
Insulation class : F  
Service factor :  
Temperature rise : 80 K  
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 2 / 2	Revision
Checked by					
Date	14/07/2025				