

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : General High Efficiency Three-Phase Product code : 11996114

Frame	: 213/5TC	Locked rotor time	: 14s (cold) 8s (hot)
Output	: 7.5 HP (5.5 kW)	Temperature rise	: 105 K
Poles	: 4	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 7.52 A	Protection degree	: IP21
L. R. Amperes	: 50.4 A	Cooling method	: IC01 - ODP
LRC	: 6.7x(Code H)	Mounting	: W-6
No load current	: 3.28 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 1755 rpm	Noise level ²	: 58.0 dB(A)
Slip	: 2.50 %	Starting method	: Direct On Line
Rated torque	: 3.10 kgfm	Approx. weight ³	: 0.0 kg
Locked rotor torque	: 180 %		
Breakdown torque	: 250 %		
Insulation class	: F		
Service factor	: 1.15		
Moment of inertia (J)	: 0.0388 kgm ²		
Design	: B		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	87.5	88.5	88.5	Max. traction	: 143 kgf
Power Factor	0.68	0.78	0.83	Max. compression	: 143 kgf

	Drive end	Non drive end
Bearing type	: 6208 ZZ	: 6206 ZZ
Sealing	: Without Bearing Seal	: Without Bearing Seal
Lubrication interval	: -	: -
Lubricant amount	: -	: -
Lubricant type	: Mobil Polyrex EM	

Notes

<p>This revision replaces and cancel the previous one, which must be eliminated.</p> <p>(1) Looking the motor from the shaft end.</p> <p>(2) Measured at 1m and with tolerance of +3dB(A).</p> <p>(3) Approximate weight subject to changes after manufacturing process.</p> <p>(4) At 100% of full load.</p>	<p>These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.</p>
---	---

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date	22/02/2025		Page	Revision
			1 / 2	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : General High Efficiency Three-Phase Product code : 11996114

LOAD PERFORMANCE CURVE

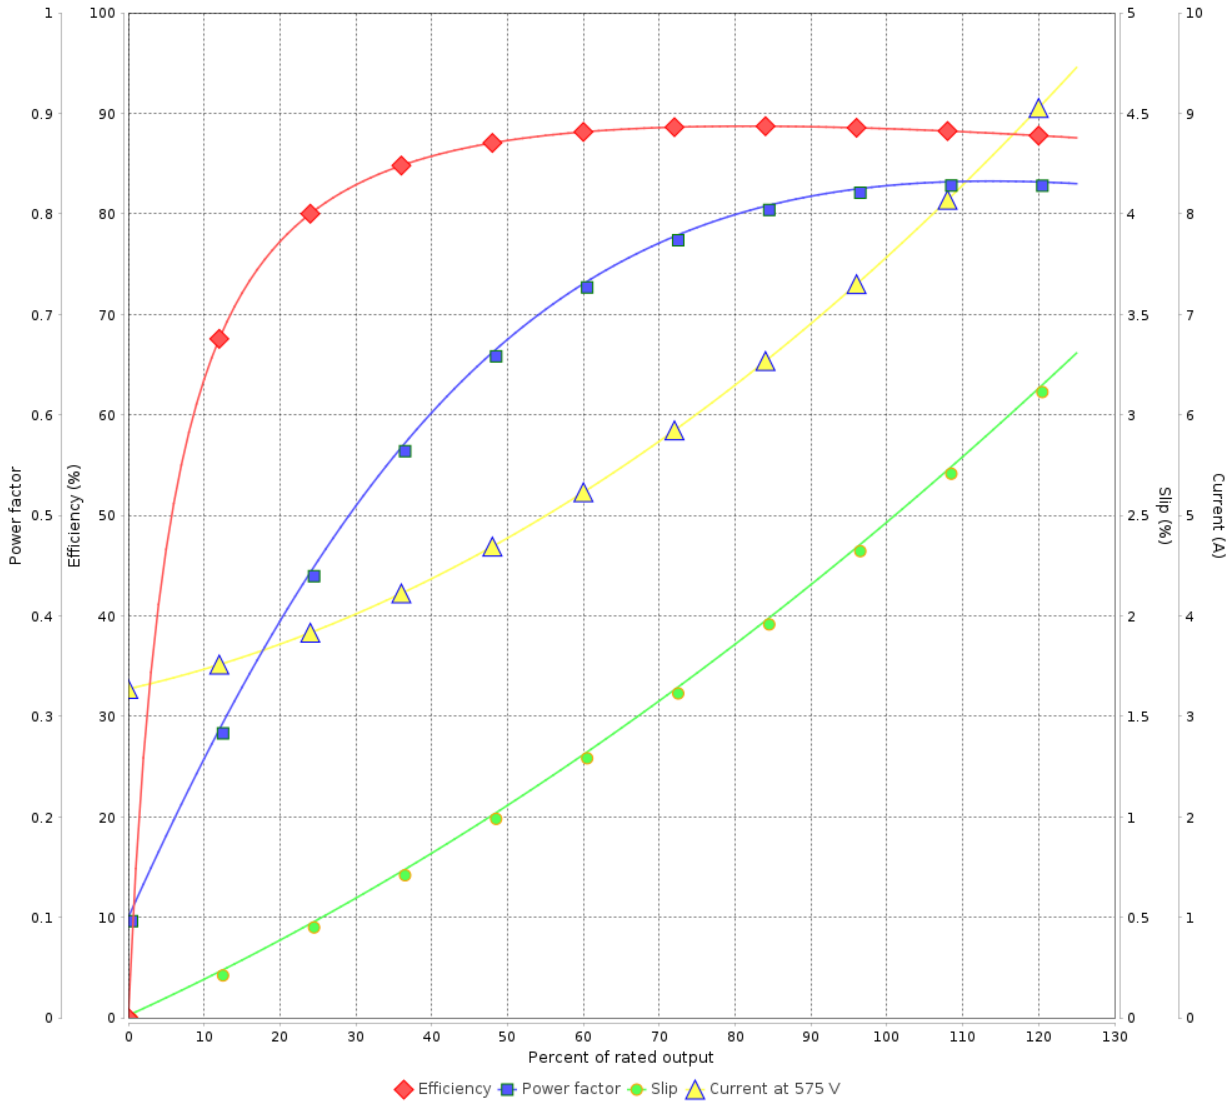

Performance : 575 V 60 Hz 4P

Rated current	: 7.52 A	Moment of inertia (J)	: 0.0388 kgm ²
LRC	: 6.7	Duty cycle	: Cont.(S1)
Rated torque	: 3.10 kgfm	Insulation class	: F
Locked rotor torque	: 180 %	Service factor	: 1.15
Breakdown torque	: 250 %	Temperature rise	: 105 K
Rated speed	: 1755 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by			2 / 2	
Date	22/02/2025			