

# DATA SHEET



## Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : ODP High Efficiency Three-Phase Product code : 11996557

Frame	: 254TC	Locked rotor time	: 30s (cold) 17s (hot)
Output	: 15 HP (11 kW)	Temperature rise	: 80 K
Frequency	: 60 Hz	Duty cycle	: Cont.(S1)
Rated voltage	: 575 V	Ambient temperature	: -20°C to +40°C
Poles	: 4	Altitude	: 1000 m.a.s.l.
Rated current	: 15.0 A	Protection degree	: IP23
	: 6.0x(Code G)	Cooling method	: IC01 - ODP
Rated speed	: 1765 rpm	Mounting	: F-1
Rated torque	: 6.17 kgfm	Rotation <sup>1</sup>	: Both (CW and CCW)
Insulation class	: F	Noise level <sup>2</sup>	: 59.0 dB(A)
Service factor	: 1.15	Starting method	: Direct On Line
Moment of inertia (J)	: 0.0652 kgm <sup>2</sup>	Approx. weight <sup>3</sup>	: 95.8 kg
Design	: B		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	89.5	91.0	91.0	Max. traction	: 194 kgf
Power Factor	0.63	0.75	0.81	Max. compression	: 290 kgf

		<u>Drive end</u>	<u>Non drive end</u>
Bearing type	:	6309 Z C3	6209 Z C3
Sealing	:	Without Bearing Seal	Without Bearing Seal
Lubrication interval	:	20000 h	20000 h
Lubricant amount	:	13 g	9 g
Lubricant type	:	Mobil Polyrex EM	

### Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	14/04/2026		1 / 2	


# LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : ODP High Efficiency Three-Phase Product code : 11996557

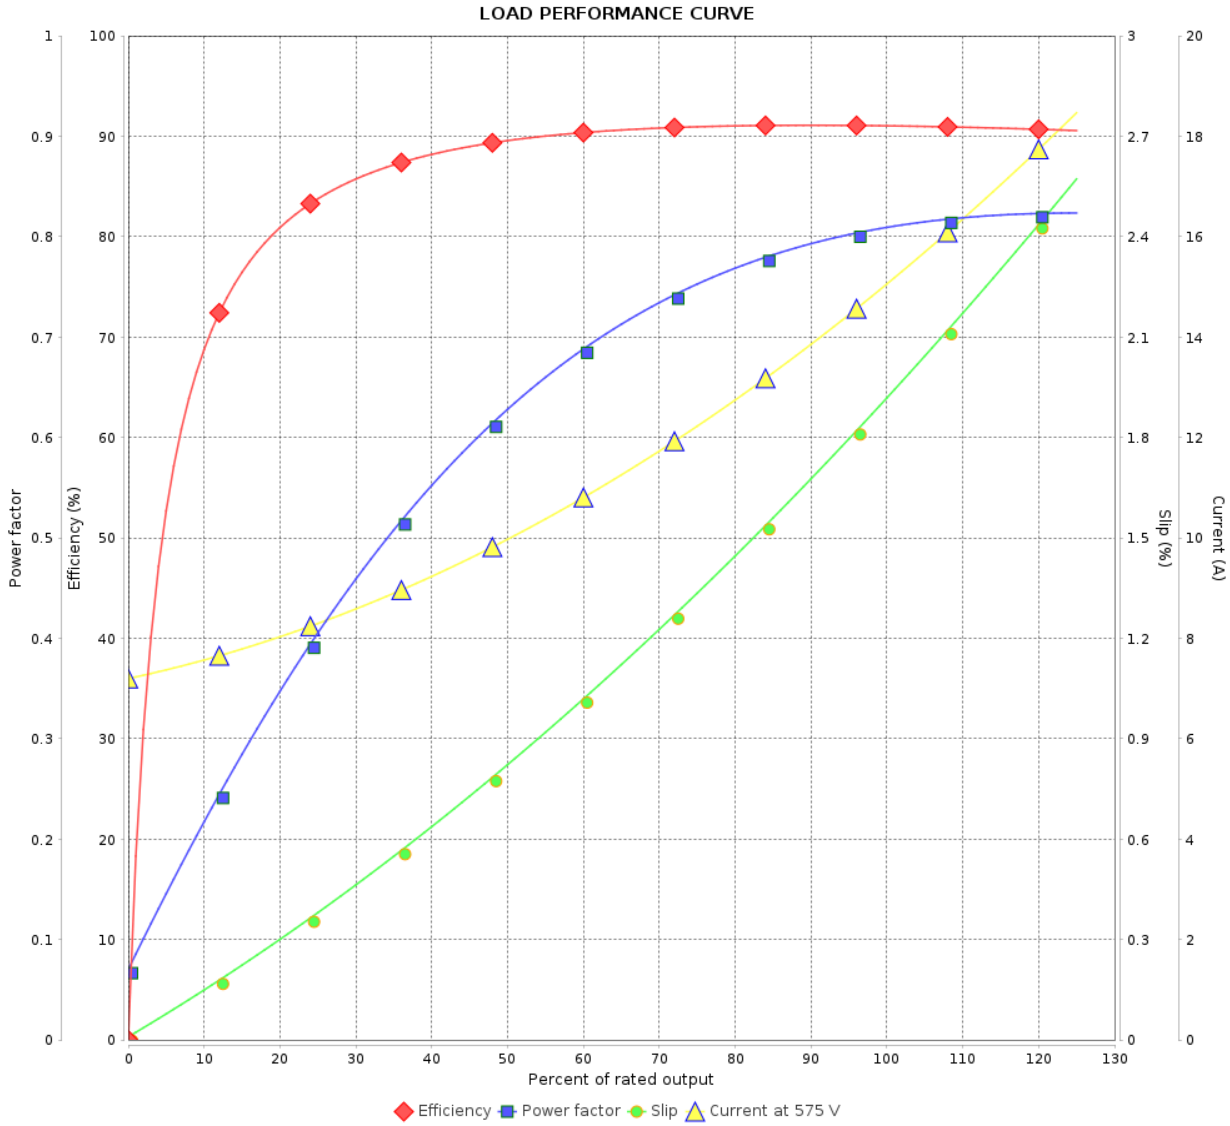

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		2 / 2		
Date		14/04/2026		