

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : ODP NEMA Premium Efficiency Three-Phase Product code : 11997216

Frame	: 284TC	Cooling method	: IC01 - ODP
Insulation class	: F	Mounting	: F-1
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 165 kg
Protection degree	: IP23	Moment of inertia (J)	: 0.1435 kgm ²
Design	: B		

Output [HP]	25	20	20	20	25	25	25
Poles	4	4	4	4	4	4	4
Frequency [Hz]	60	50	50	50	50	50	50
Rated voltage [V]	230/460	380	400	415	380	400	415
Rated current [A]	59.8/29.9	29.8	29.4	28.6	36.1	35.1	34.0
L. R. Amperes [A]	401/200	197	194	186	195	193	187
LRC [A]	6.7x(Code H)	6.6x(Code H)	6.6x(Code H)	6.5x(Code H)	5.4x(Code F)	5.5x(Code F)	5.5x(Code F)
No load current [A]	24.0/12.0	11.9	12.9	13.8	11.9	12.9	13.8
Rated speed [RPM]	1770	1470	1470	1475	1460	1465	1470
Slip [%]	1.67	2.00	2.00	1.67	2.67	2.33	2.00
Rated torque [kgfm]	10.3	9.87	9.87	9.84	12.4	12.4	12.3
Locked rotor torque [%]	250	290	300	330	229	240	260
Breakdown torque [%]	280	300	330	360	240	260	290
Service factor	1.15	1.15	1.15	1.15	1.15	1.15	1.15
Temperature rise	80 K	80 K	80 K	80 K	80 K	80 K	80 K
Locked rotor time	27s (cold) 15s (hot)	36s (cold) 20s (hot)	37s (cold) 21s (hot)	41s (cold) 23s (hot)	36s (cold) 20s (hot)	37s (cold) 21s (hot)	41s (cold) 23s (hot)
Noise level ²	62.0 dB(A)						
Efficiency (%)	25%						
	50%	92.4	89.6	89.4	88.8	91.0	91.0
	75%	93.0	91.5	91.5	91.4	91.7	91.7
	100%	93.6	92.1	92.1	92.3	91.7	92.4
Power Factor	25%						
	50%	0.67	0.66	0.62	0.59	0.73	0.69
	75%	0.78	0.78	0.74	0.71	0.82	0.79
	100%	0.83	0.83	0.80	0.78	0.85	0.83

	<u>Drive end</u>	<u>Non drive end</u>	Foundation loads
Bearing type	: 6311 Z C3	6211 Z C3	Max. traction : 429 kgf
Sealing	: Without	Without	Max. compression : 594 kgf
	Bearing Seal	Bearing Seal	
Lubrication interval	: 20000 h	20000 h	
Lubricant amount	: 18 g	11 g	
Lubricant type	: Mobil Polyrex EM		

Notes

USABLE @208V 66.1A SF 1.15 SFA 76.0A

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date	21/03/2026			

Page 1 / 8
Revision

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : ODP NEMA Premium Efficiency
Three-Phase

Product code : 11997216

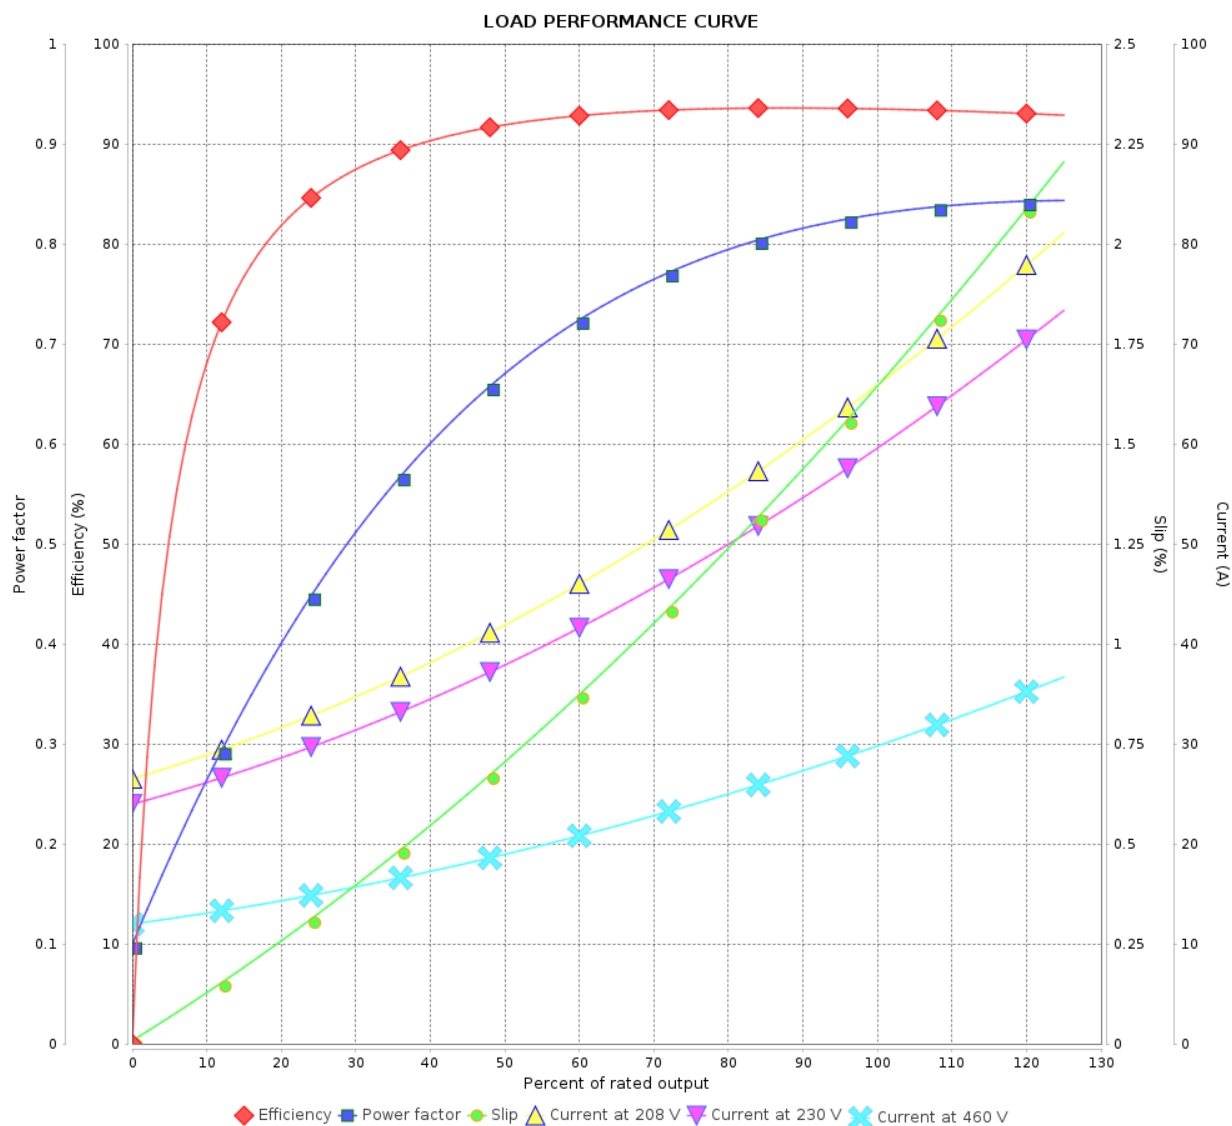

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				2 / 8	
Date					
	21/03/2026				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : ODP NEMA Premium Efficiency
Three-Phase

Product code : 11997216

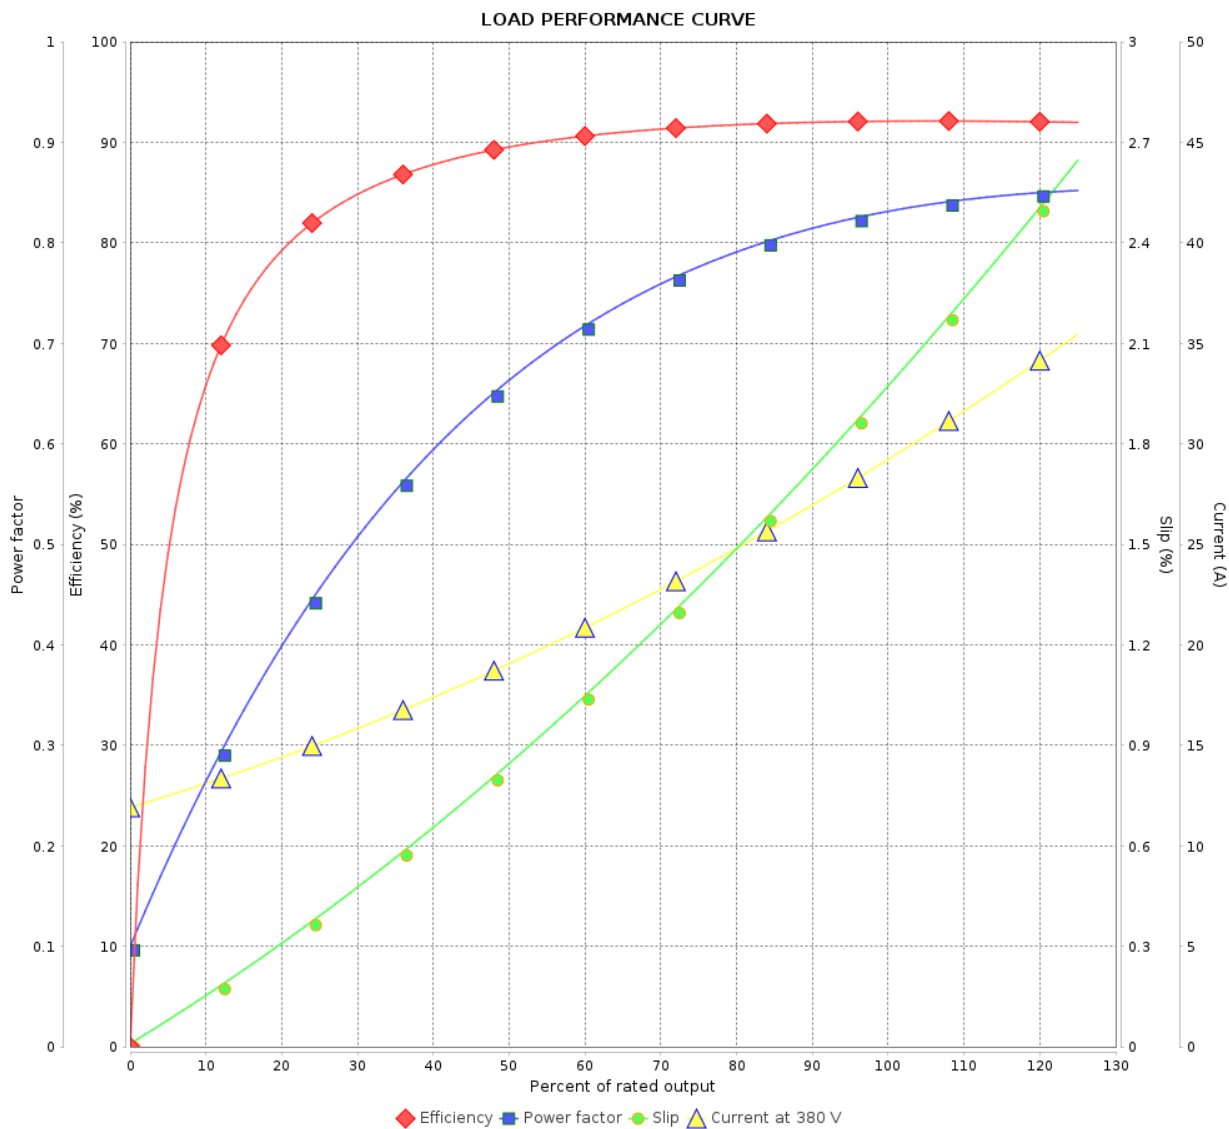

Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by					
Date	21/03/2026				
			Page 3 / 8	Revision	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : ODP NEMA Premium Efficiency
Three-Phase

Product code : 11997216

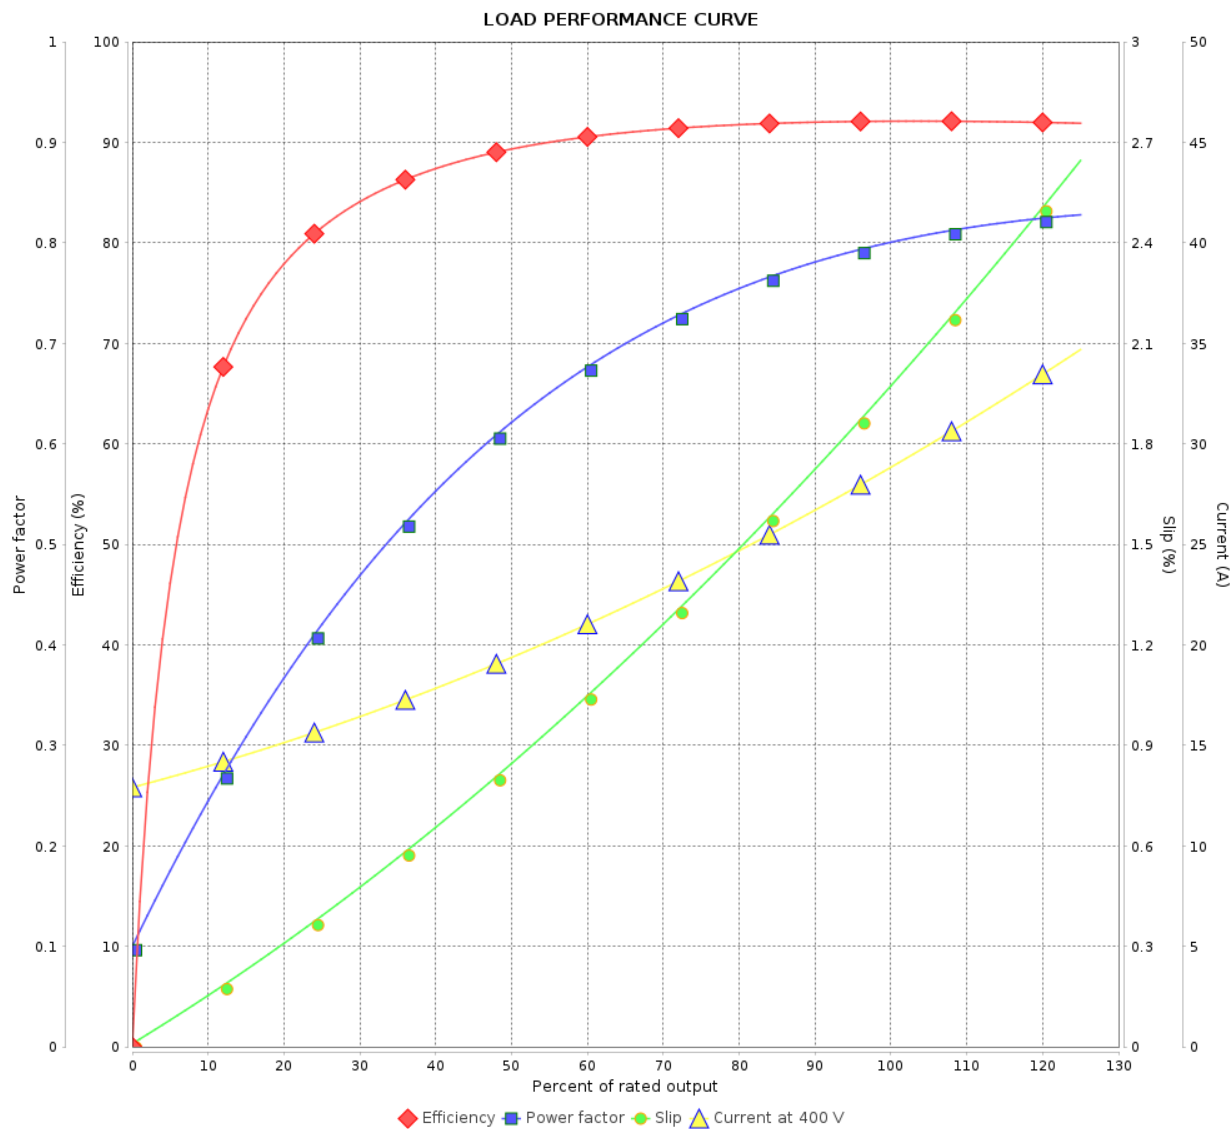

Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by					
Date	21/03/2026				
			Page 4 / 8	Revision	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : ODP NEMA Premium Efficiency
Three-Phase

Product code : 11997216

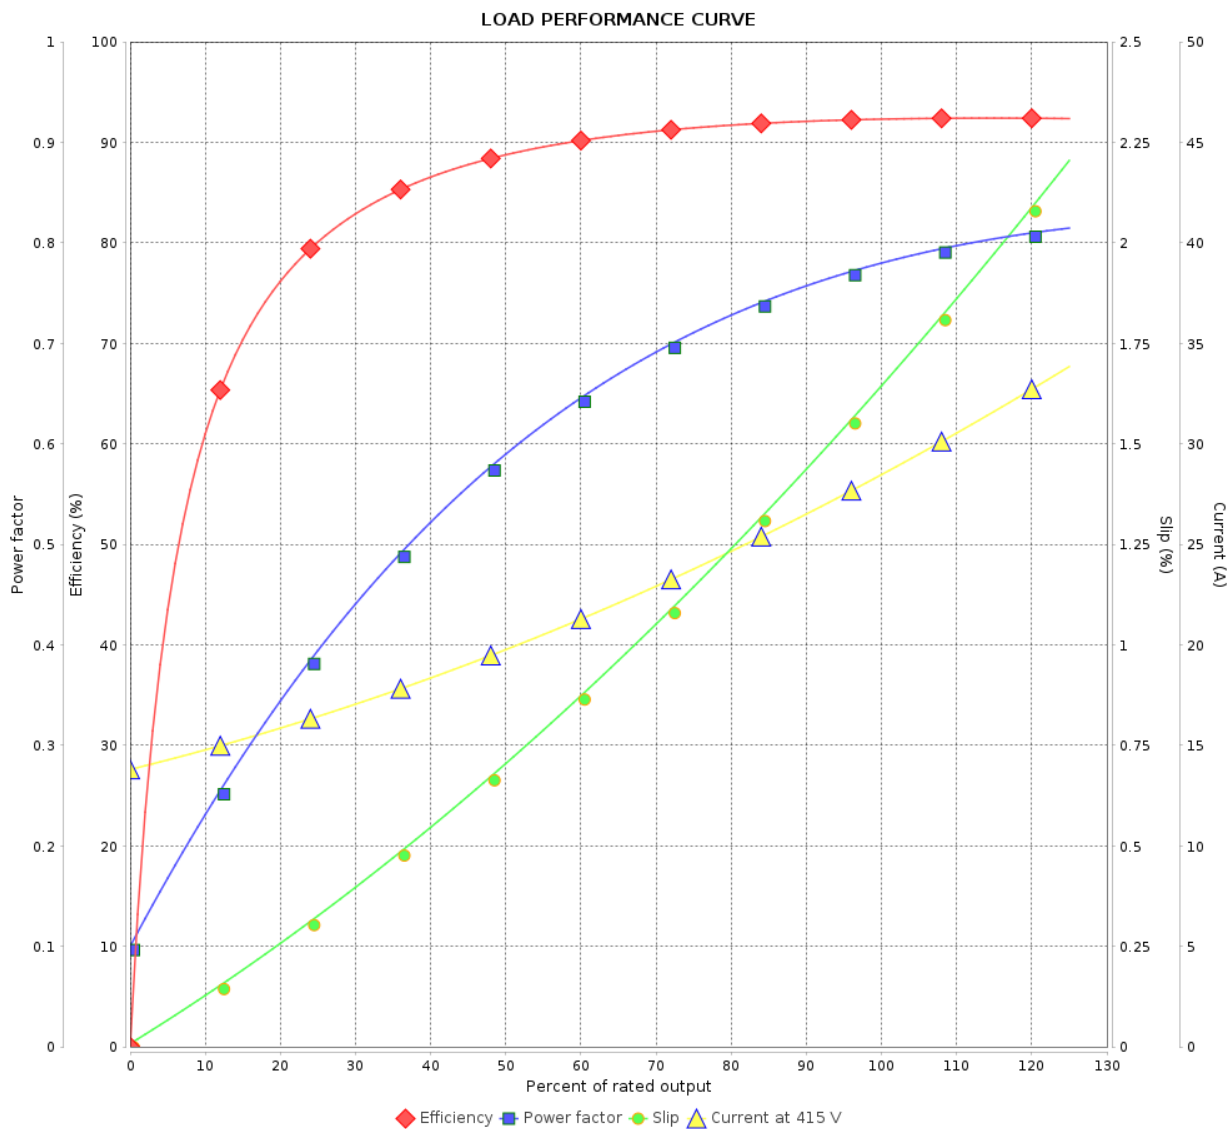

Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by					
Date	21/03/2026				
				Page 5 / 8	Revision

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : ODP NEMA Premium Efficiency
Three-Phase

Product code : 11997216

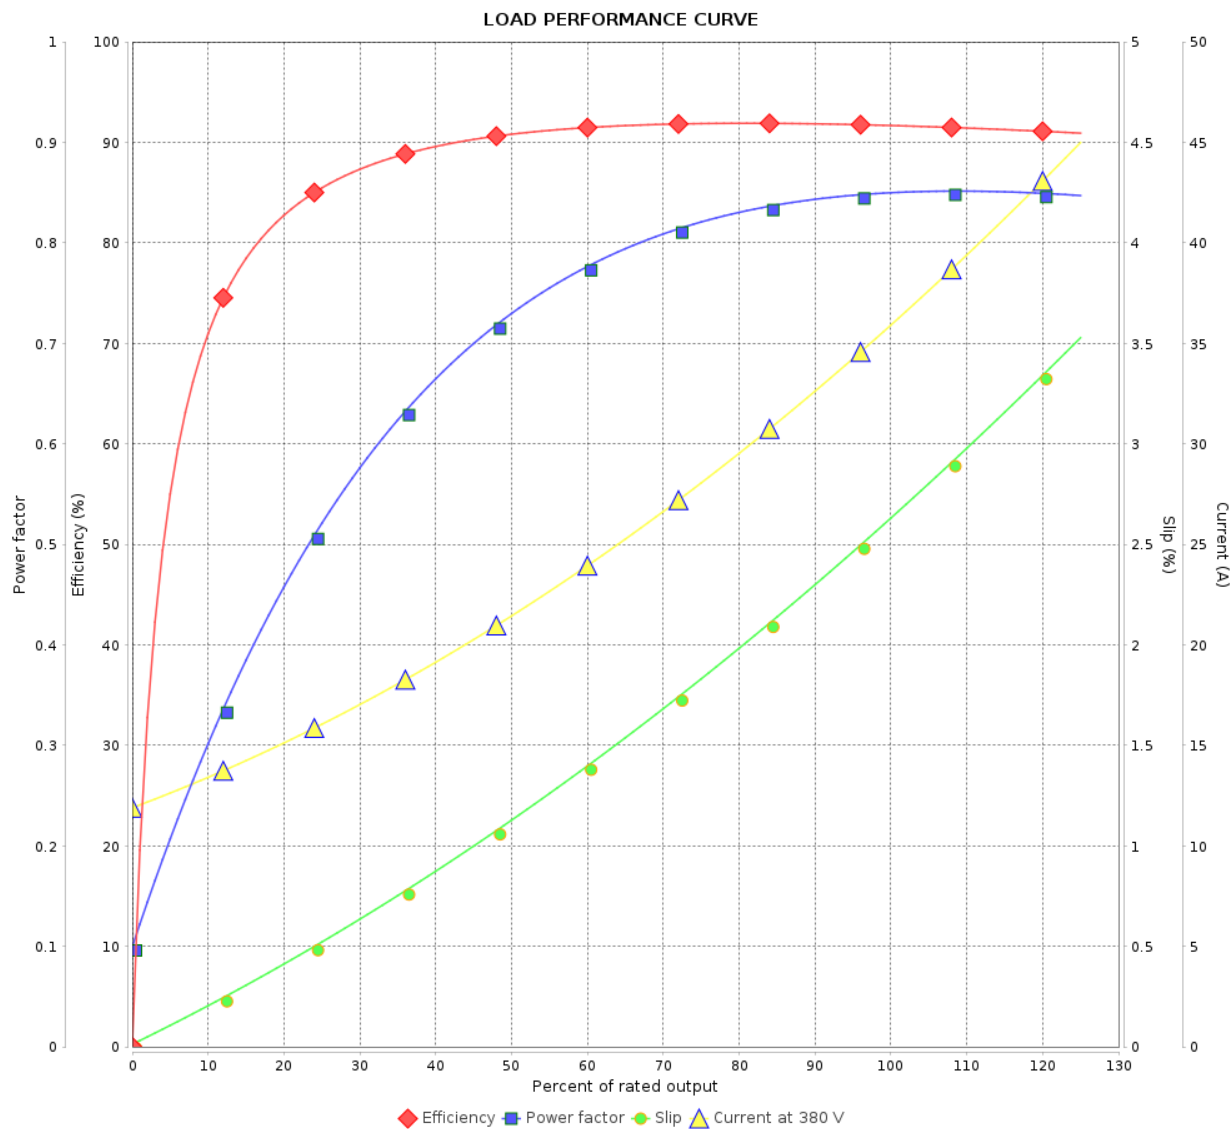

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				6 / 8	
Date					
	21/03/2026				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : ODP NEMA Premium Efficiency
Three-Phase

Product code : 11997216

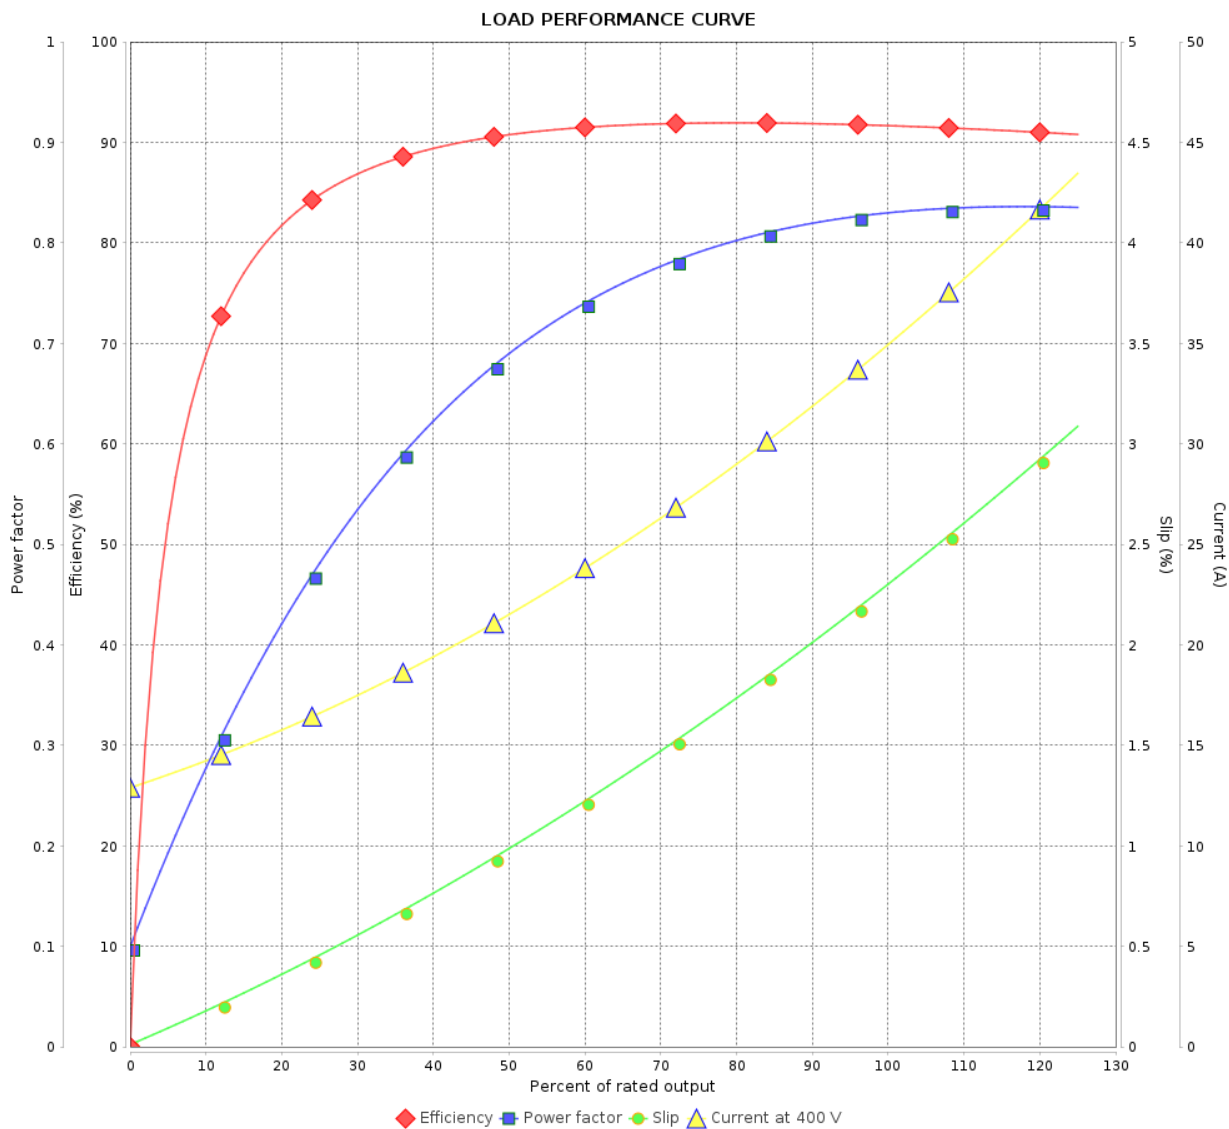

Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by					
Date	21/03/2026				
			Page 7 / 8	Revision	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : ODP NEMA Premium Efficiency Three-Phase Product code : 11997216

LOAD PERFORMANCE CURVE

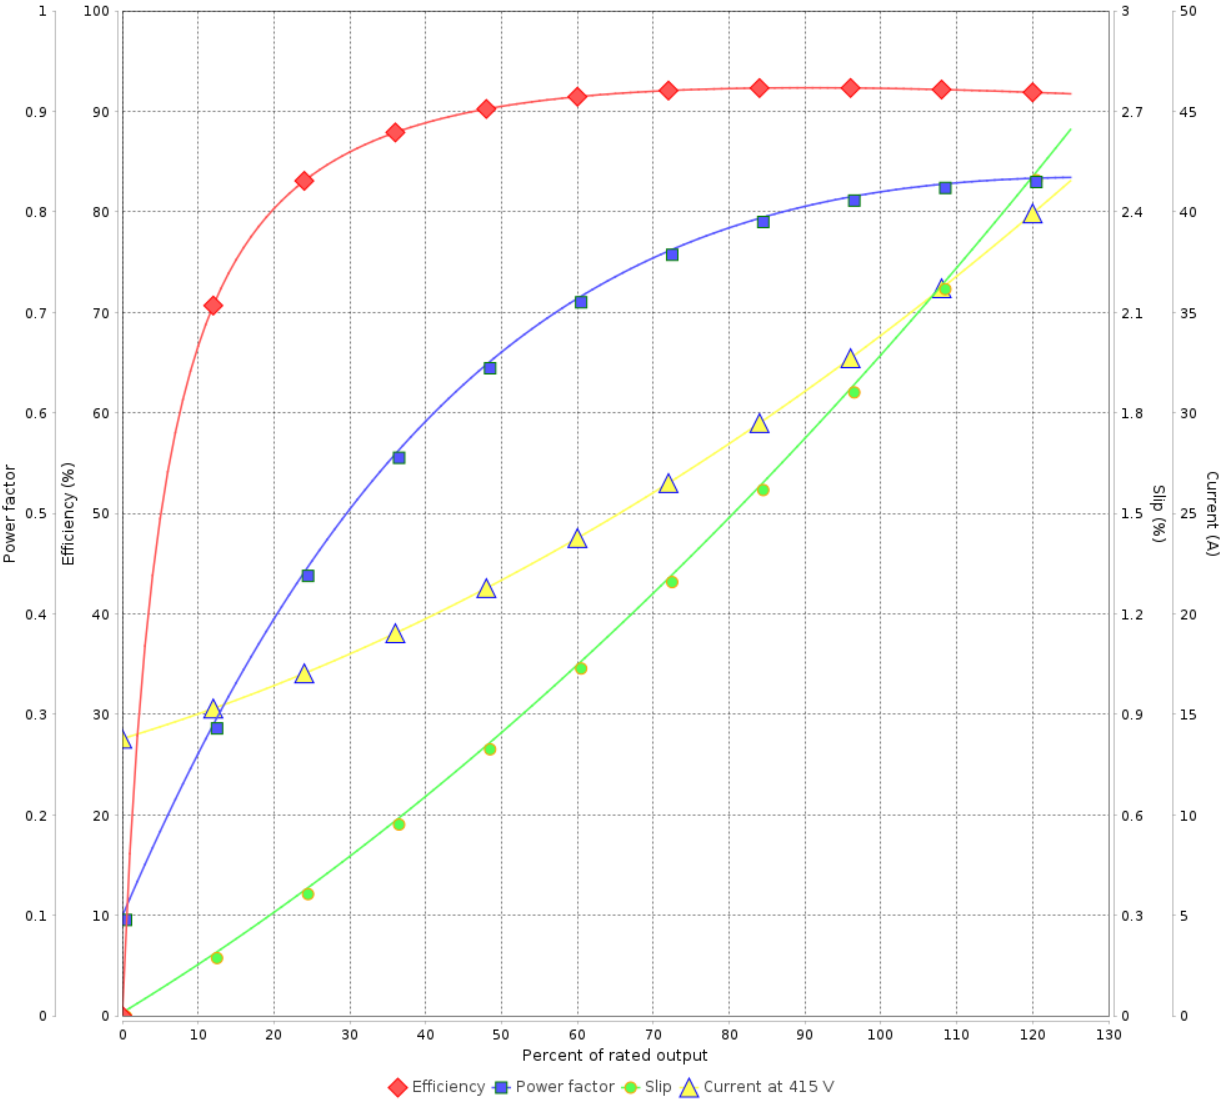

Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by					
Date	21/03/2026				
			Page 8 / 8	Revision	