

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : Close Coupled Pump NEMA Premium Efficiency Three-Phase Product code : 12022912

Frame	: 254JM	Cooling method	: IC01 - ODP
Insulation class	: F	Mounting	: W-6
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line
Altitude	: 1000 m.a.s.l.	Approx. weight ²	: 89.2 kg
Protection degree	: IP23	Moment of inertia (J)	: 0.0309 kgm ²
Design	: B		

Output [HP]	20	15	15	15	20	20	20
Poles	2	2	2	2	2	2	2
Frequency [Hz]	60	50	50	50	50	50	50
Rated voltage [V]	230/460	380	400	415	380	400	415
Rated current [A]	49.2/24.6	22.1	22.0	22.0	30.3	29.5	28.8
L. R. Amperes [A]	276/138	126	132	143	133	142	150
LRC [A]	5.6x(Code F)	5.7x(Code F)	6.0x(Code G)	6.5x(Code H)	4.4x(Code D)	4.8x(Code E)	5.2x(Code F)
No load current [A]	18.2/9.10	9.00	10.0	11.5	9.00	10.0	11.5
Rated speed [RPM]	3520	2935	2940	2945	2900	2910	2920
Slip [%]	2.22	2.17	2.00	1.83	3.33	3.00	2.67
Rated torque [kgfm]	4.12	3.71	3.70	3.70	5.01	4.99	4.97
Locked rotor torque [%]	160	180	200	220	130	140	150
Breakdown torque [%]	250	270	300	320	180	220	240
Service factor	1.15	1.15	1.15	1.15	1.15	1.15	1.15
Temperature rise	80 K	80 K	80 K	80 K	80 K	80 K	80 K
Locked rotor time	21s (cold) 12s (hot)	16s (cold) 9s (hot)	14s (cold) 8s (hot)	14s (cold) 8s (hot)	16s (cold) 9s (hot)	14s (cold) 8s (hot)	14s (cold) 8s (hot)
Noise level ²	66.0 dB(A)						
Efficiency (%)	25%						
	50%	89.5	84.7	84.4	85.0	86.5	87.5
	75%	90.2	86.9	86.9	87.9	87.5	88.5
	100%	91.0	91.2	91.2	91.4	87.5	88.5
Power Factor	25%						
	50%	0.71	0.65	0.60	0.55	0.74	0.69
	75%	0.80	0.77	0.72	0.68	0.83	0.79
	100%	0.84	0.83	0.79	0.76	0.86	0.82

	<u>Drive end</u>	<u>Non drive end</u>	Foundation loads
Bearing type	: 6309 Z C3	6209 Z C3	Max. traction : 143 kgf
Sealing	: Without	Without	Max. compression : 232 kgf
	<u>Bearing Seal</u>	<u>Bearing Seal</u>	
Lubrication interval	: 15797 h	18447 h	
Lubricant amount	: 13 g	9 g	
Lubricant type	: Mobil Polyrex EM		

Notes
USABLE @208V 53.0A SF 1.15 SFA 60.9A

This revision replaces and cancel the previous one, which must be eliminated.
 (1) Looking the motor from the shaft end.
 (2) Measured at 1m and with tolerance of +3dB(A).
 (3) Approximate weight subject to changes after manufacturing process.
 (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	14/01/2024		1 / 8	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : Close Coupled Pump NEMA Premium
Efficiency Three-Phase

Product code : 12022912

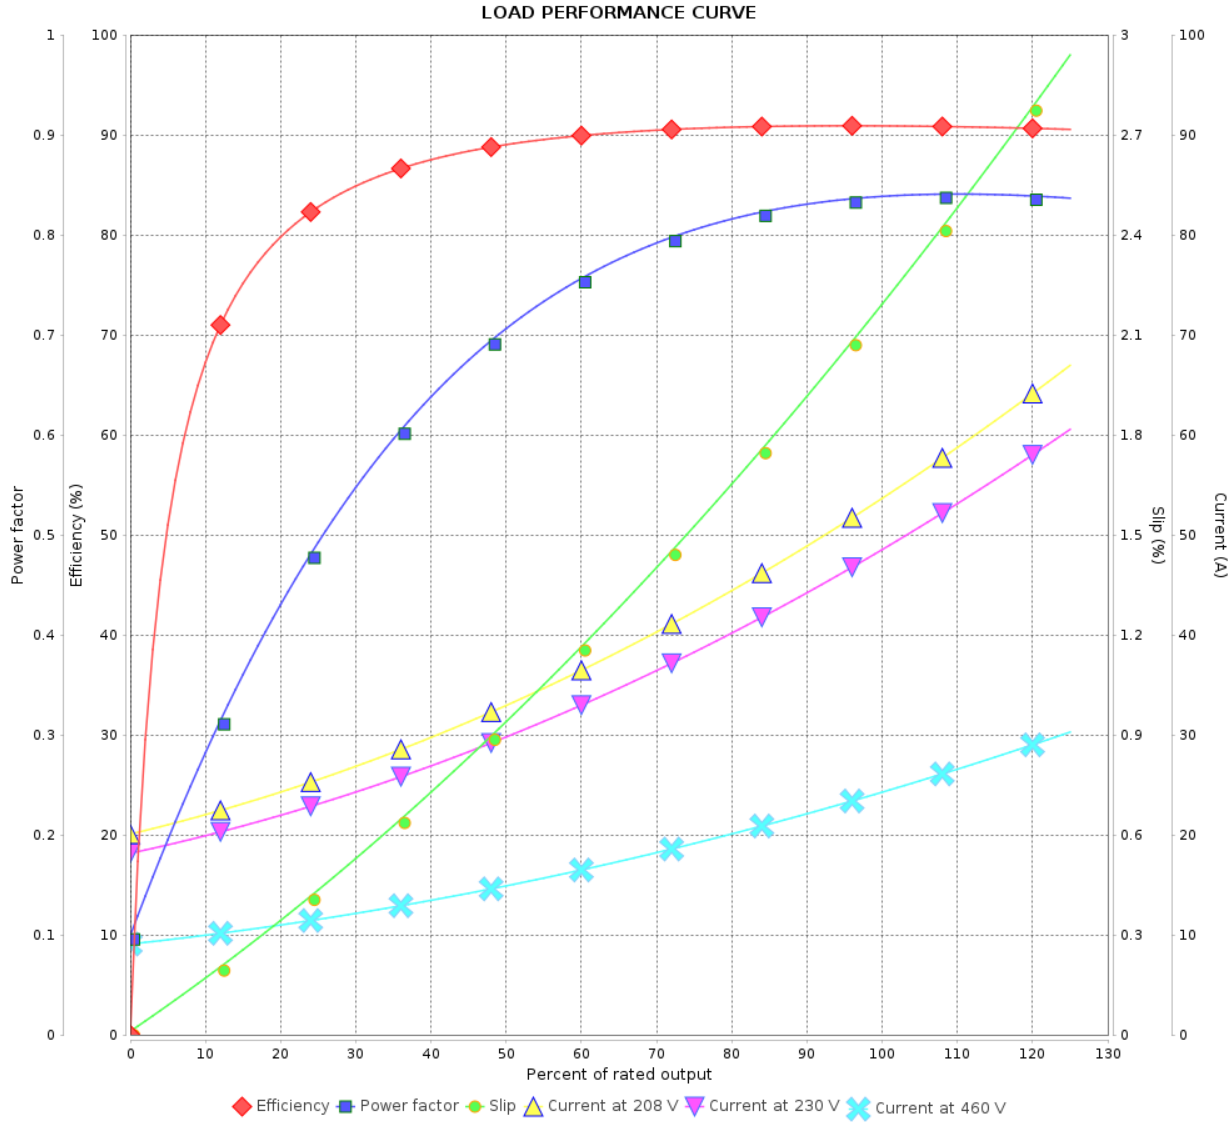

Performance : 230/460 V 60 Hz 2P

Rated current : 49.2/24.6 A
LRC : 5.6
Rated torque : 4.12 kgfm
Locked rotor torque : 160 %
Breakdown torque : 250 %
Rated speed : 3520 rpm

Moment of inertia (J) : 0.0309 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 8	Revision
Checked by				
Date	14/01/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : Close Coupled Pump NEMA Premium
Efficiency Three-Phase

Product code : 12022912

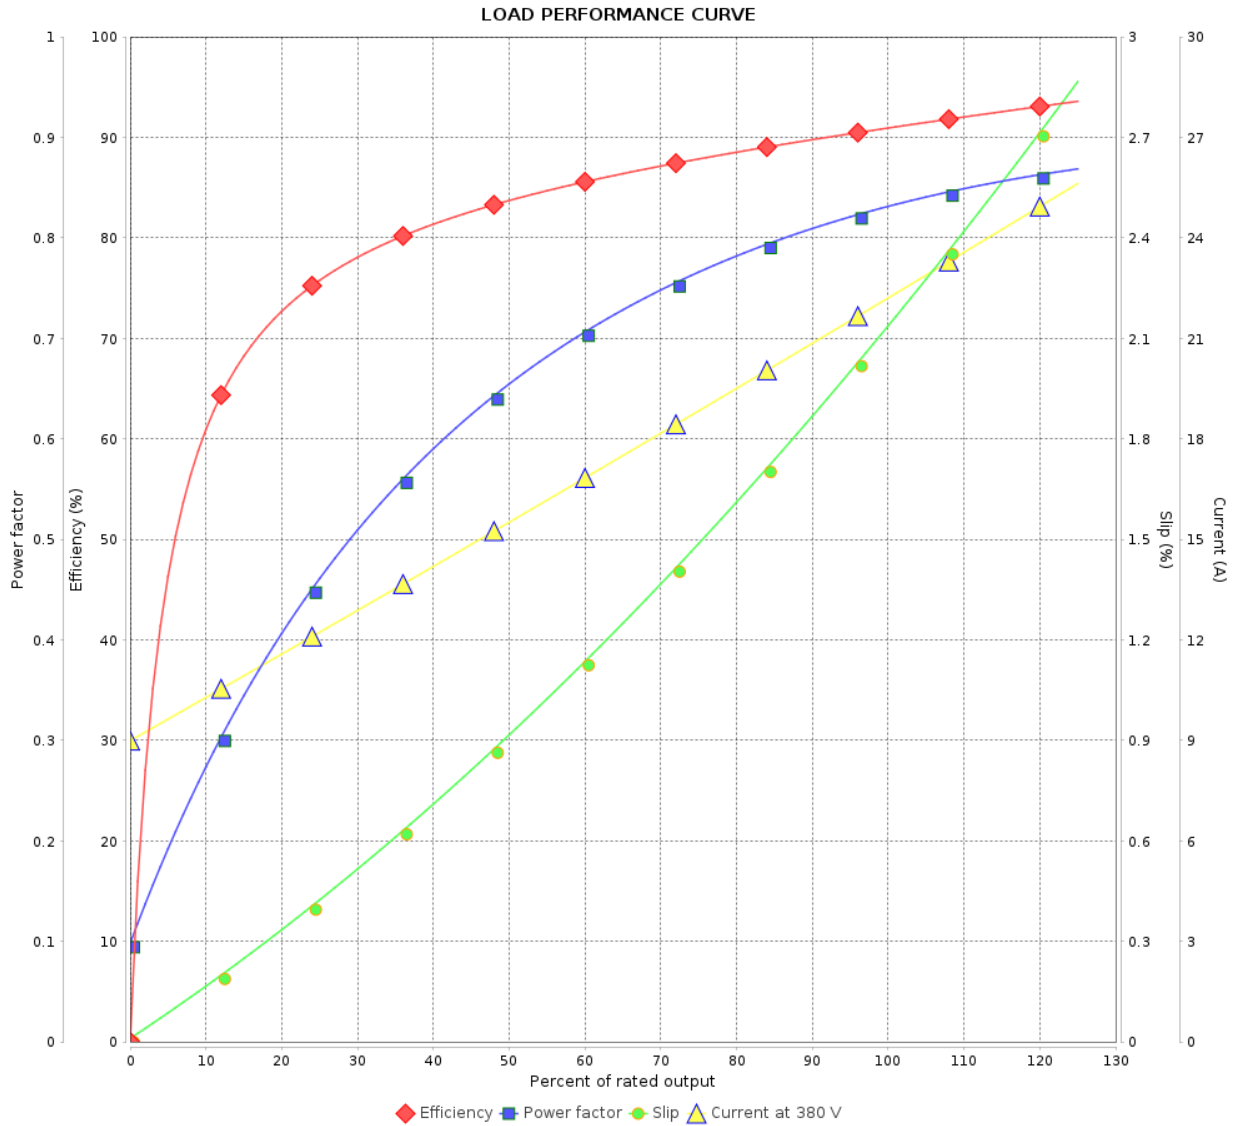

Performance : 380 V 50 Hz 2P IE3

Rated current : 22.1 A
LRC : 5.7
Rated torque : 3.71 kgfm
Locked rotor torque : 180 %
Breakdown torque : 270 %
Rated speed : 2935 rpm

Moment of inertia (J) : 0.0309 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Close Coupled Pump NEMA Premium
Efficiency Three-Phase

Product code : 12022912

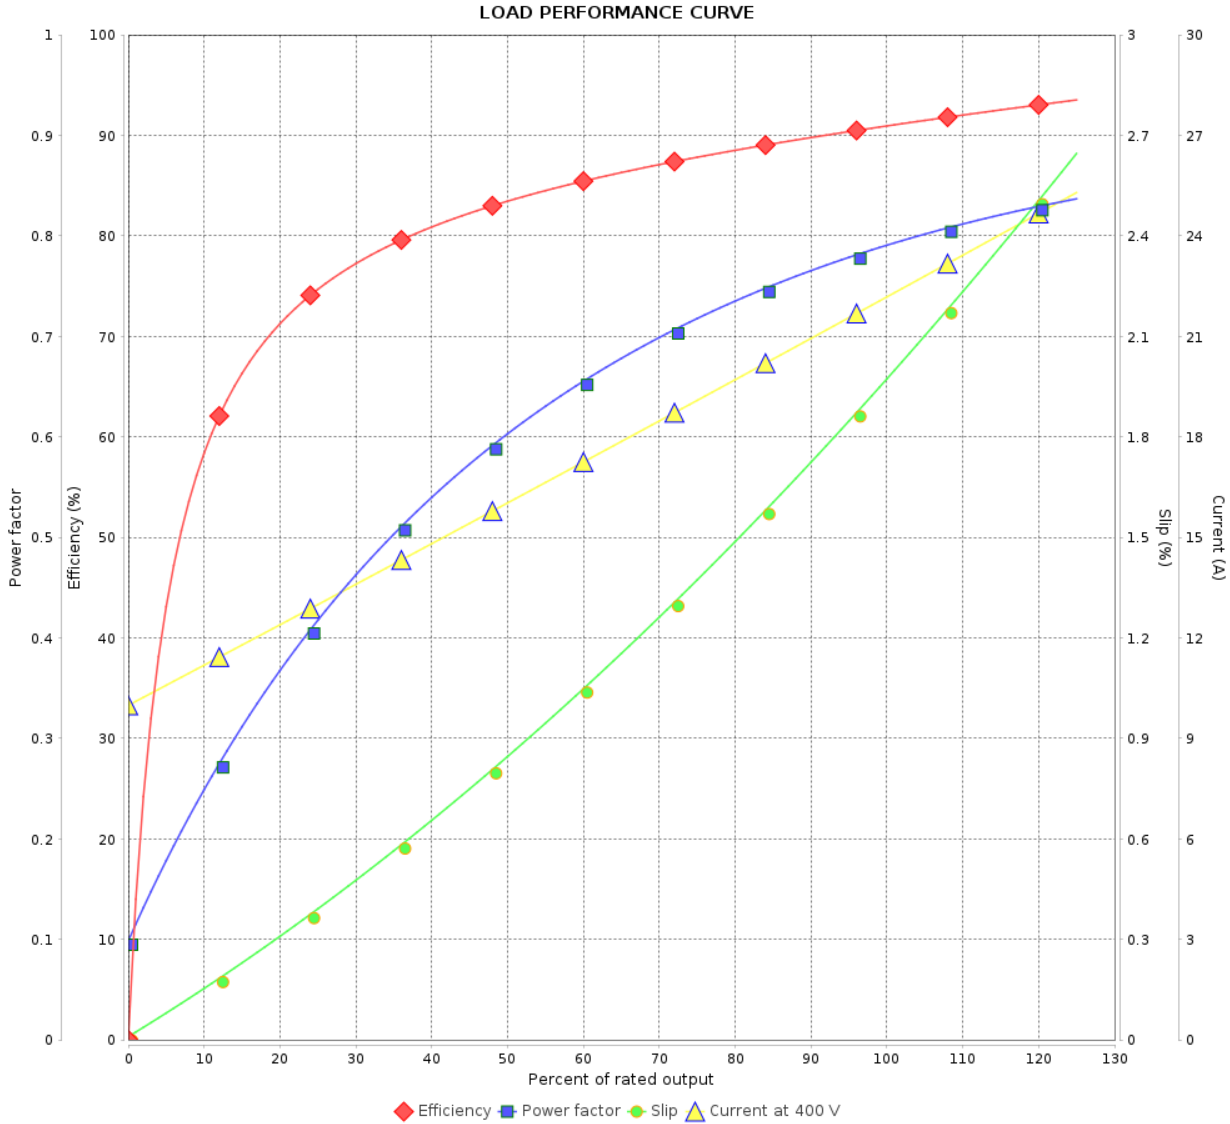

Performance : 400 V 50 Hz 2P IE3

Rated current : 22.0 A
 LRC : 6.0
 Rated torque : 3.70 kgfm
 Locked rotor torque : 200 %
 Breakdown torque : 300 %
 Rated speed : 2940 rpm

Moment of inertia (J) : 0.0309 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		4 / 8		
Date		14/01/2024		

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : Close Coupled Pump NEMA Premium
Efficiency Three-Phase

Product code : 12022912

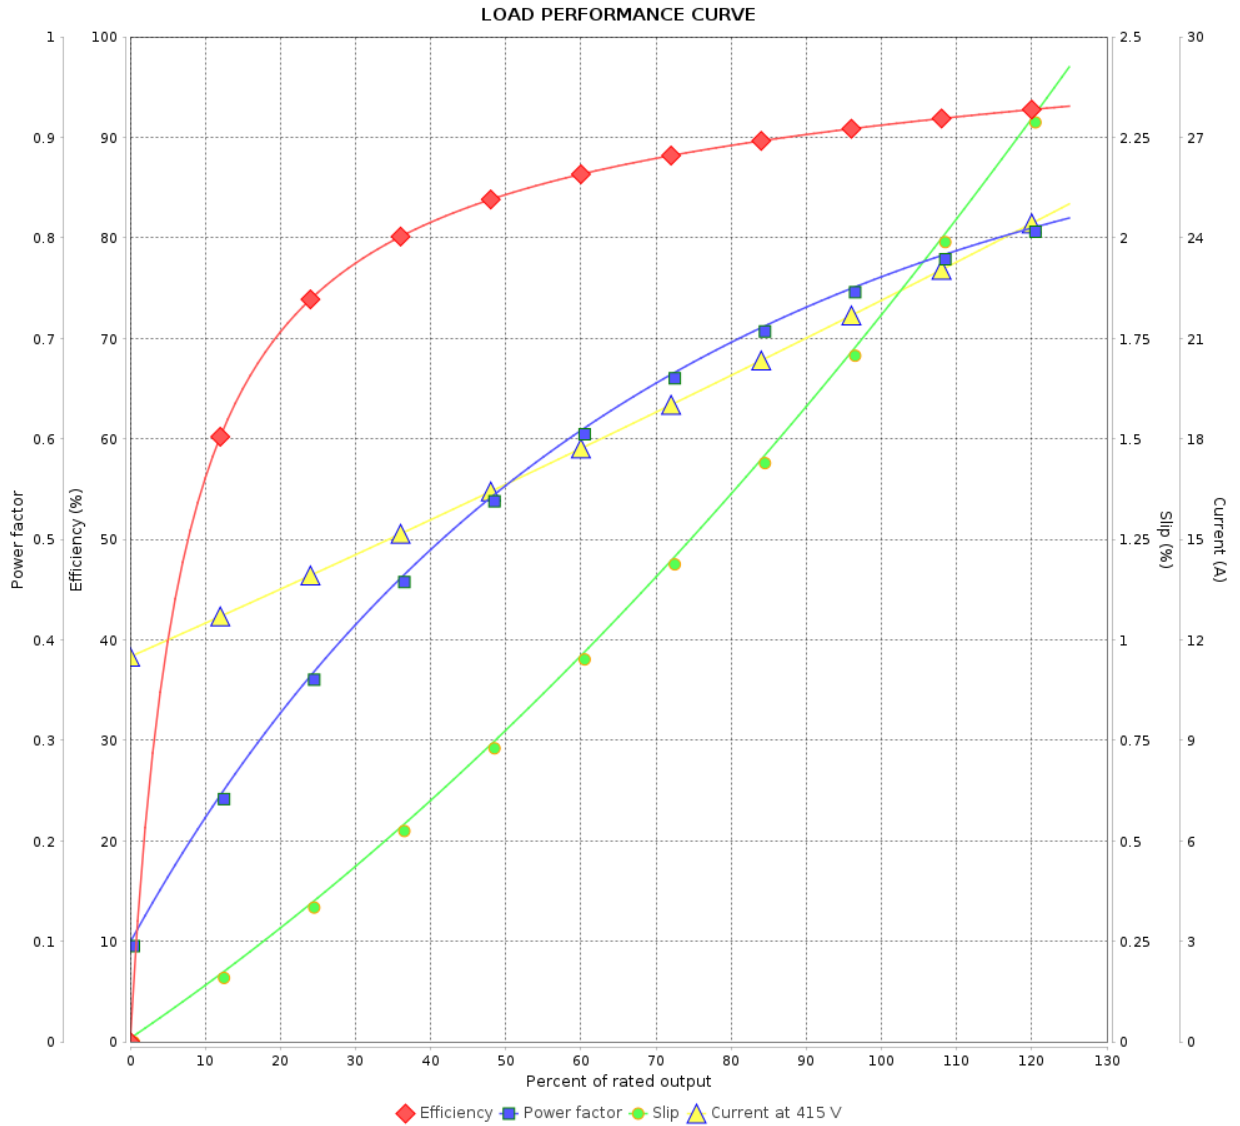

Performance : 415 V 50 Hz 2P IE3

Rated current : 22.0 A
LRC : 6.5
Rated torque : 3.70 kgfm
Locked rotor torque : 220 %
Breakdown torque : 320 %
Rated speed : 2945 rpm

Moment of inertia (J) : 0.0309 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 5 / 8	Revision
Checked by				
Date	14/01/2024			

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : Close Coupled Pump NEMA Premium
Efficiency Three-Phase

Product code : 12022912

LOAD PERFORMANCE CURVE

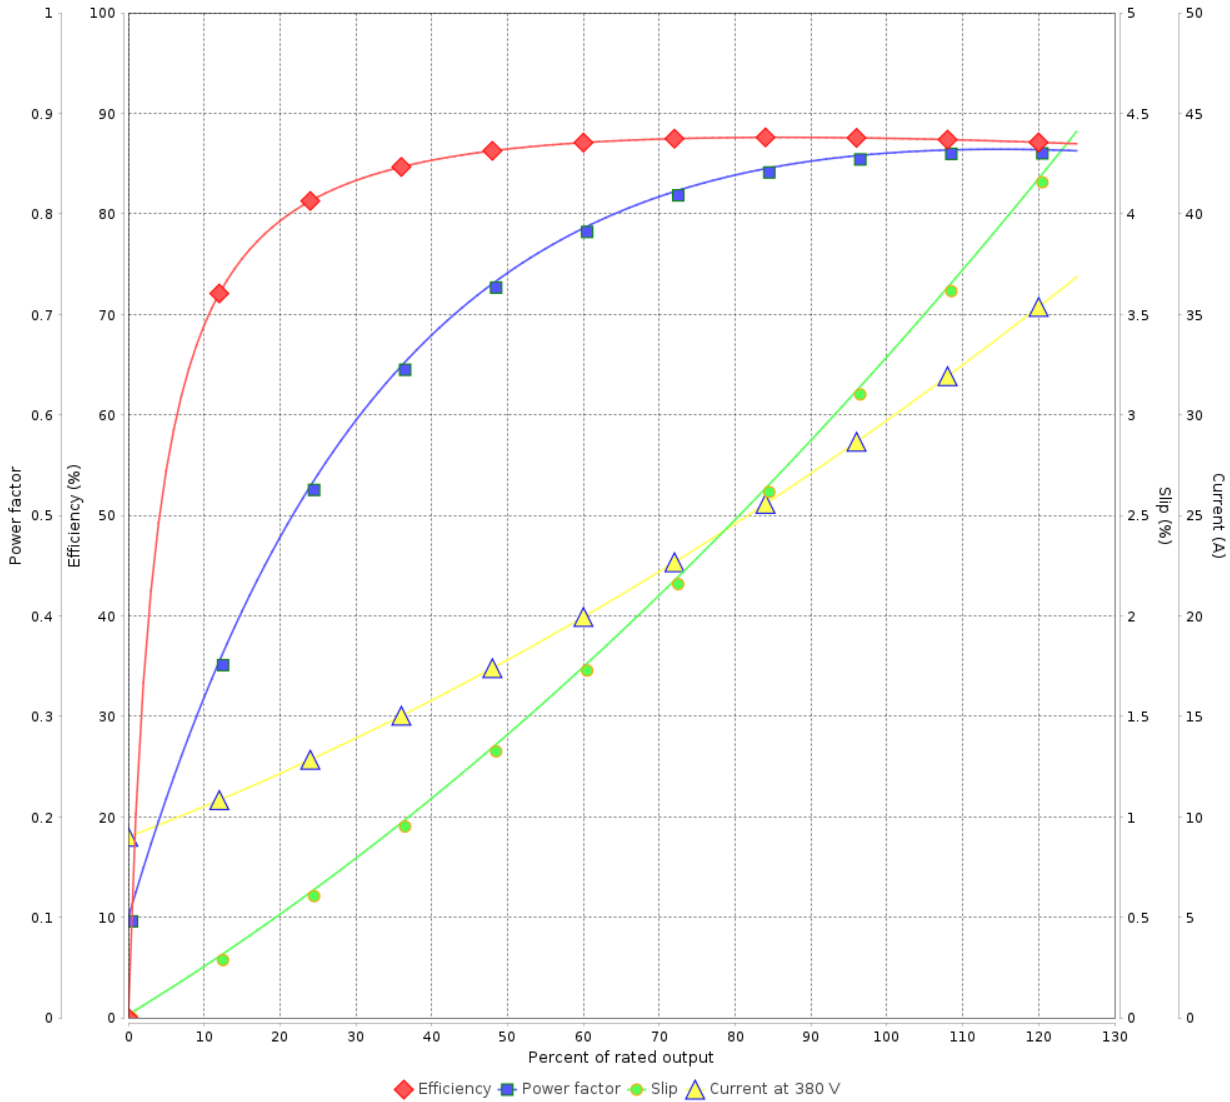

Performance : 380 V 50 Hz 2P

Rated current	: 30.3 A	Moment of inertia (J)	: 0.0309 kgm ²
LRC	: 4.4	Duty cycle	: Cont.(S1)
Rated torque	: 5.01 kgfm	Insulation class	: F
Locked rotor torque	: 130 %	Service factor	: 1.15
Breakdown torque	: 180 %	Temperature rise	: 80 K
Rated speed	: 2900 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by			6 / 8	
Date	14/01/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Close Coupled Pump NEMA Premium
Efficiency Three-Phase

Product code : 12022912

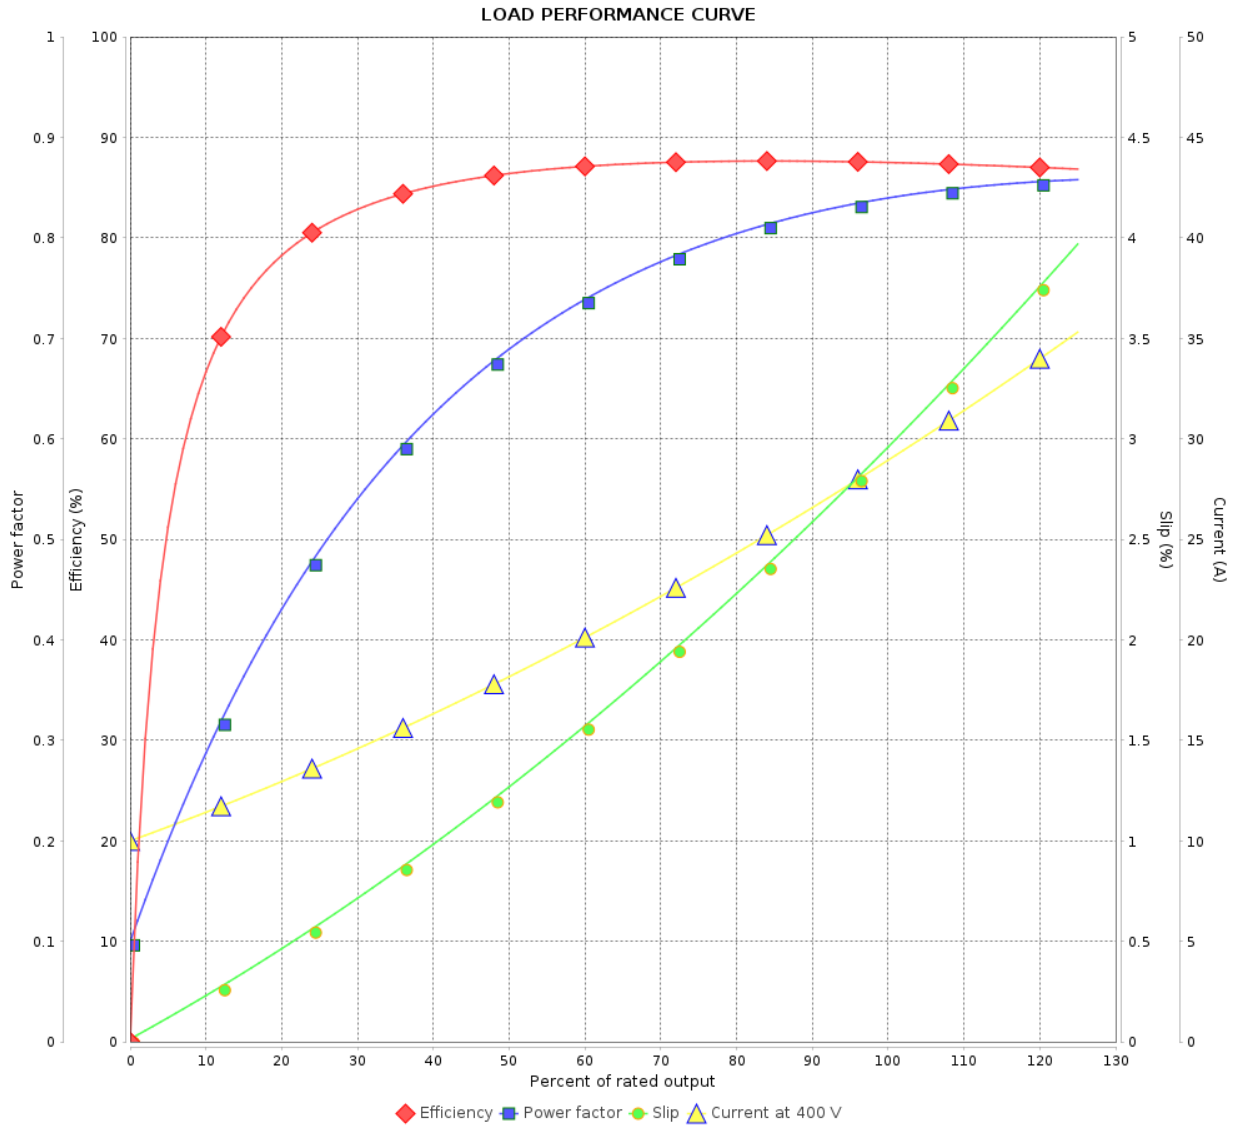

Performance : 400 V 50 Hz 2P

Rated current : 29.5 A
 LRC : 4.8
 Rated torque : 4.99 kgfm
 Locked rotor torque : 140 %
 Breakdown torque : 220 %
 Rated speed : 2910 rpm

Moment of inertia (J) : 0.0309 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Close Coupled Pump NEMA Premium
Efficiency Three-Phase

Product code : 12022912

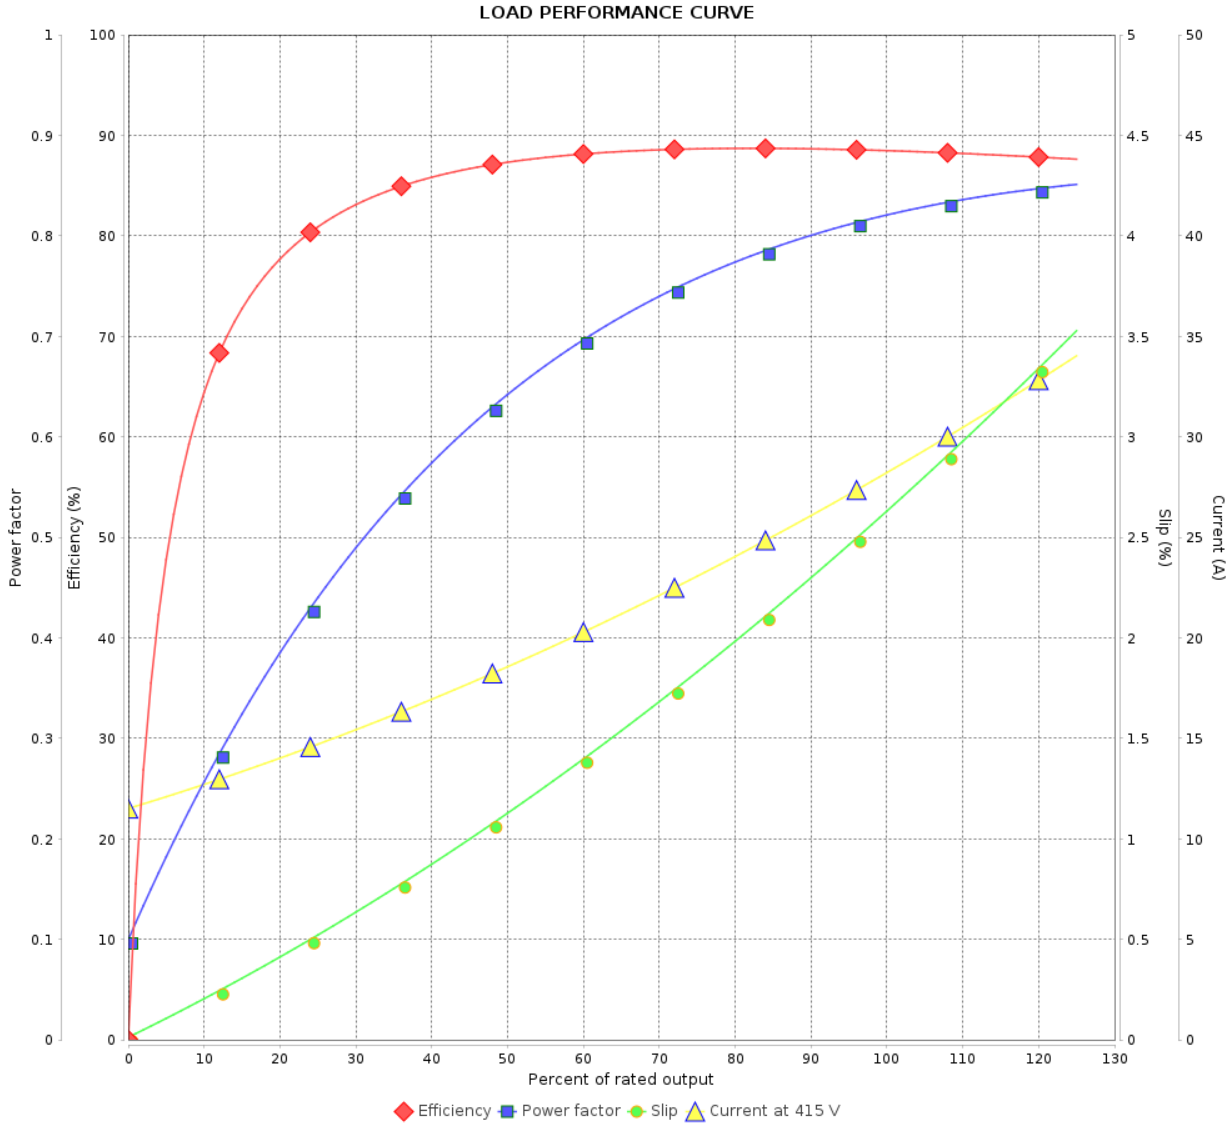

Performance : 415 V 50 Hz 2P

Rated current : 28.8 A
LRC : 5.2
Rated torque : 4.97 kgfm
Locked rotor torque : 150 %
Breakdown torque : 240 %
Rated speed : 2920 rpm

Moment of inertia (J) : 0.0309 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				