

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : ODP NEMA Premium Efficiency Three-Phase Product code : 12261267

Frame	: 324T	Cooling method	: IC01 - ODP
Insulation class	: F	Mounting	: F-1
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line
Altitude	: 1000 m.a.s.l.	Approx. weight ²	: 215 kg
Protection degree	: IP23	Moment of inertia (J)	: 0.2551 kgm ²
Design	: B		

Output [HP]	40	30	30	30	40	40	40
Poles	4	4	4	4	4	4	4
Frequency [Hz]	60	50	50	50	50	50	50
Rated voltage [V]	230/460	380	400	415	380	400	415
Rated current [A]	96.4/48.2	42.8	41.6	41.1	58.1	55.8	54.4
L. R. Amperes [A]	598/299	270	291	312	279	301	321
LRC [A]	6.2x(Code G)	6.3x(Code G)	7.0x(Code H)	7.6x(Code J)	4.8x(Code E)	5.4x(Code F)	5.9x(Code G)
No load current [A]	37.0/18.5	15.4	16.8	18.1	15.4	16.8	18.1
Rated speed [RPM]	1775	1475	1475	1480	1465	1470	1475
Slip [%]	1.39	1.67	1.67	1.33	2.33	2.00	1.67
Rated torque [kgfm]	16.4	14.8	14.8	14.7	19.8	19.7	19.7
Locked rotor torque [%]	220	240	270	290	180	200	220
Breakdown torque [%]	229	340	370	400	250	280	300
Service factor	1.15	1.15	1.15	1.15	1.15	1.15	1.15
Temperature rise	80 K	80 K	80 K	80 K	80 K	80 K	80 K
Locked rotor time	50s (cold) 28s (hot)	36s (cold) 20s (hot)	32s (cold) 18s (hot)	30s (cold) 17s (hot)	36s (cold) 20s (hot)	32s (cold) 18s (hot)	30s (cold) 17s (hot)
Noise level ²	64.0 dB(A)						
Efficiency (%)	25%						
	50%	93.6	90.1	89.9	89.8	91.7	91.7
	75%	94.1	91.7	91.7	92.0	91.7	91.7
	100%	94.1	93.0	93.0	93.0	92.3	92.3
Power Factor	25%						
	50%	0.68	0.70	0.66	0.63	0.77	0.74
	75%	0.78	0.80	0.77	0.74	0.84	0.82
	100%	0.83	0.84	0.82	0.80	0.85	0.84

	<u>Drive end</u>	<u>Non drive end</u>	Foundation loads
Bearing type	: 6312 Z C3	6212 Z C3	Max. traction : 636 kgf
Sealing	: Without	Without	Max. compression : 851 kgf
	<u>Bearing Seal</u>	<u>Bearing Seal</u>	
Lubrication interval	: 20000 h	20000 h	
Lubricant amount	: 21 g	13 g	
Lubricant type	: Mobil Polyrex EM		

Notes
USABLE @208V 107A SF 1.15 SFA 123A

This revision replaces and cancel the previous one, which must be eliminated.
 (1) Looking the motor from the shaft end.
 (2) Measured at 1m and with tolerance of +3dB(A).
 (3) Approximate weight subject to changes after manufacturing process.
 (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	05/02/2024		1 / 8	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : ODP NEMA Premium Efficiency Three-Phase

Product code : 12261267

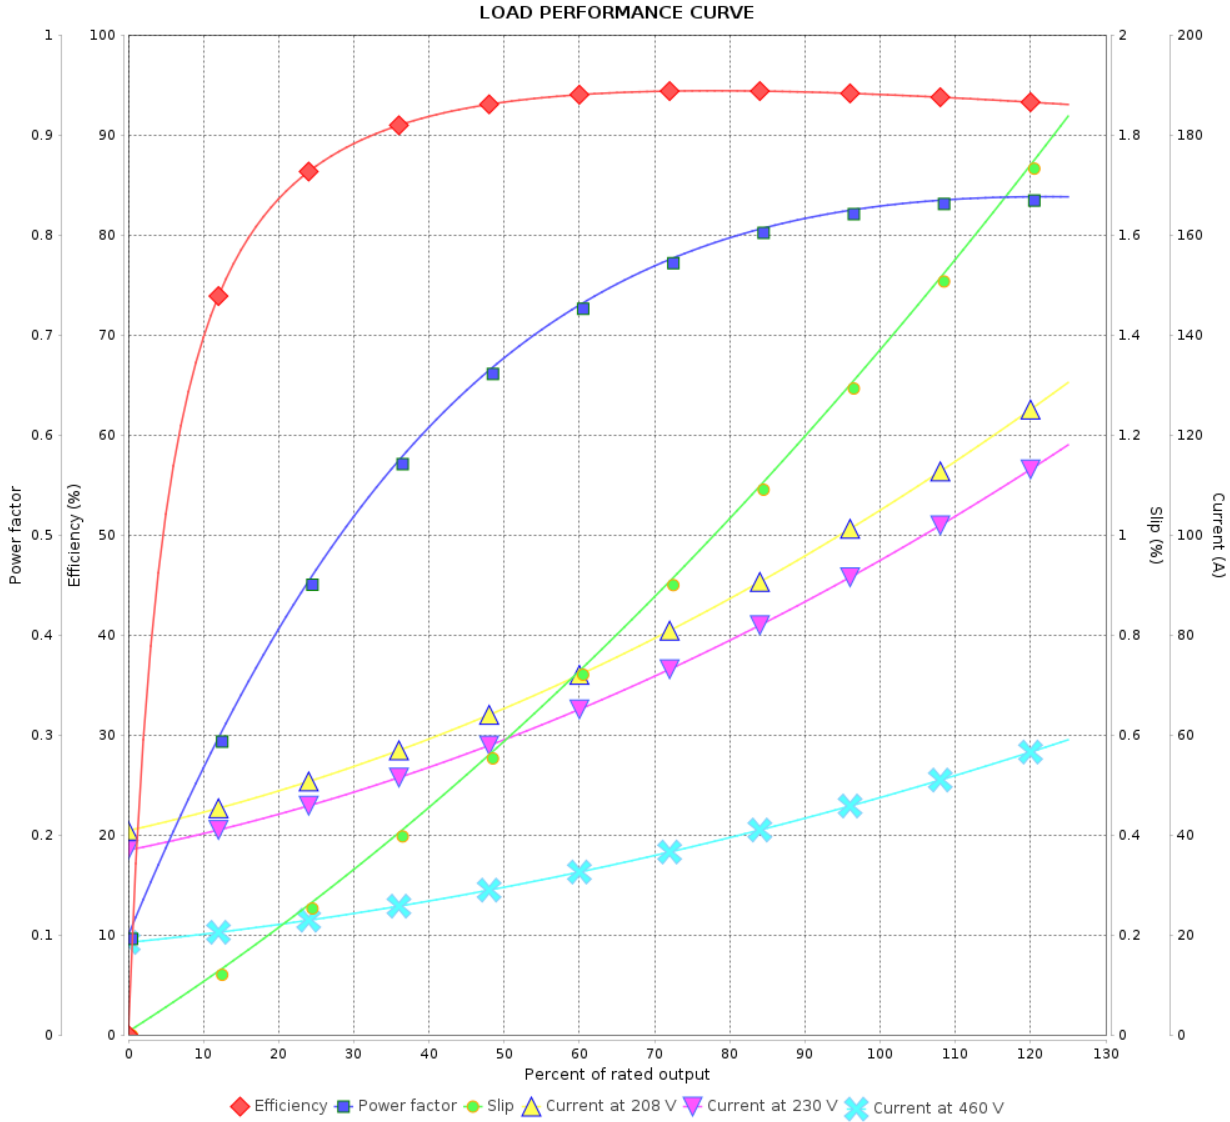

Performance : 230/460 V 60 Hz 4P

Rated current : 96.4/48.2 A
 LRC : 6.2
 Rated torque : 16.4 kgfm
 Locked rotor torque : 220 %
 Breakdown torque : 229 %
 Rated speed : 1775 rpm

Moment of inertia (J) : 0.2551 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by			2 / 8	
Date	05/02/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : ODP NEMA Premium Efficiency Three-Phase

Product code : 12261267

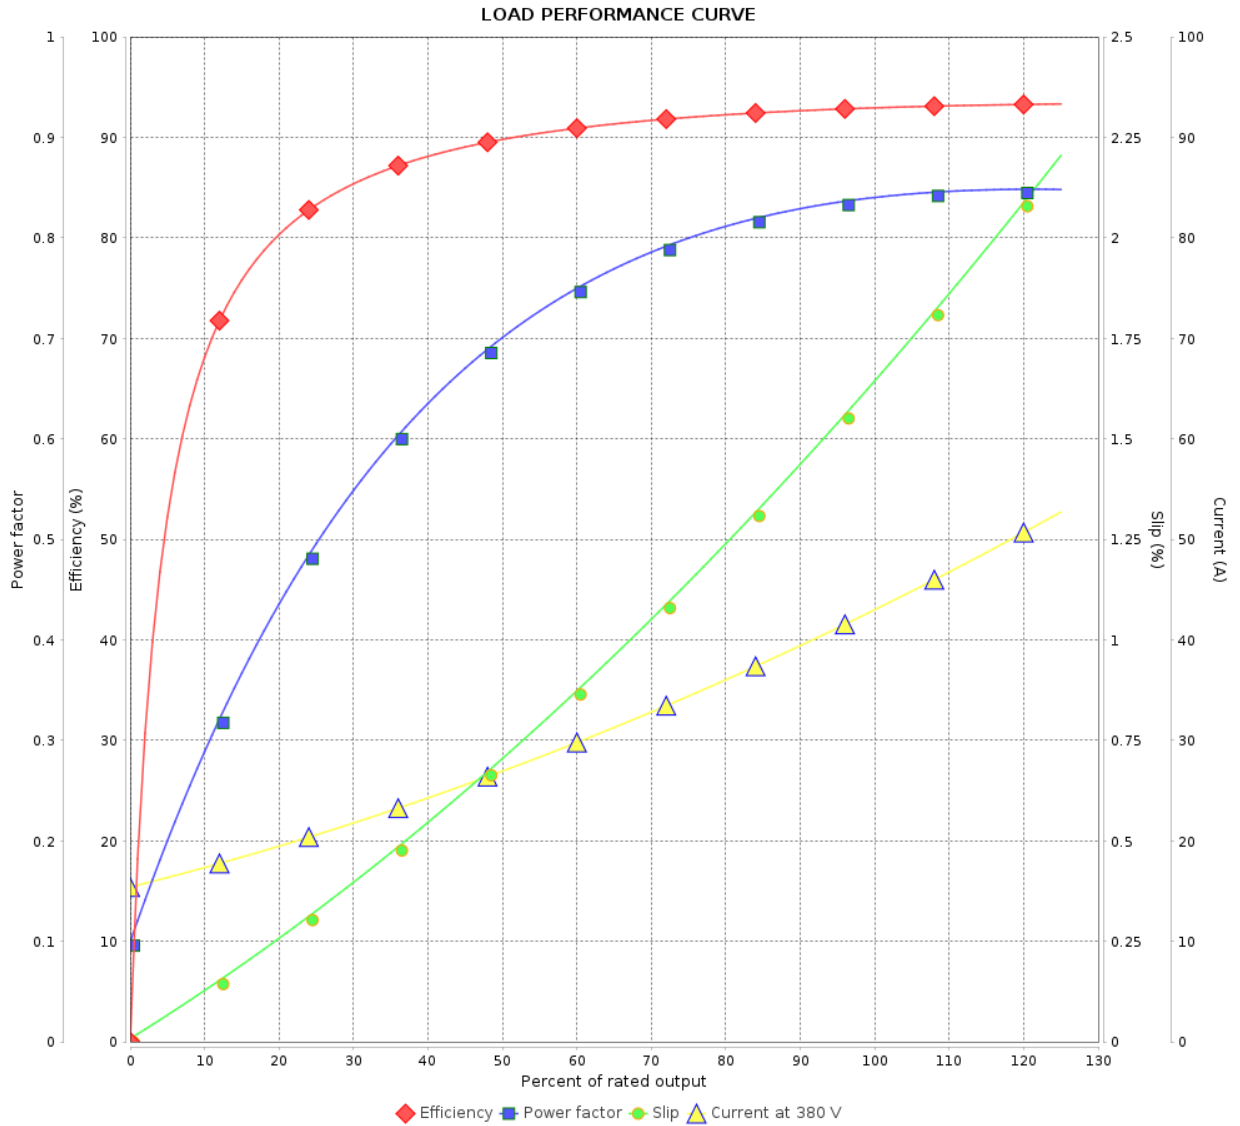

Performance : 380 V 50 Hz 4P IE3

Rated current : 42.8 A
 LRC : 6.3
 Rated torque : 14.8 kgfm
 Locked rotor torque : 240 %
 Breakdown torque : 340 %
 Rated speed : 1475 rpm

Moment of inertia (J) : 0.2551 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : ODP NEMA Premium Efficiency Three-Phase

Product code : 12261267

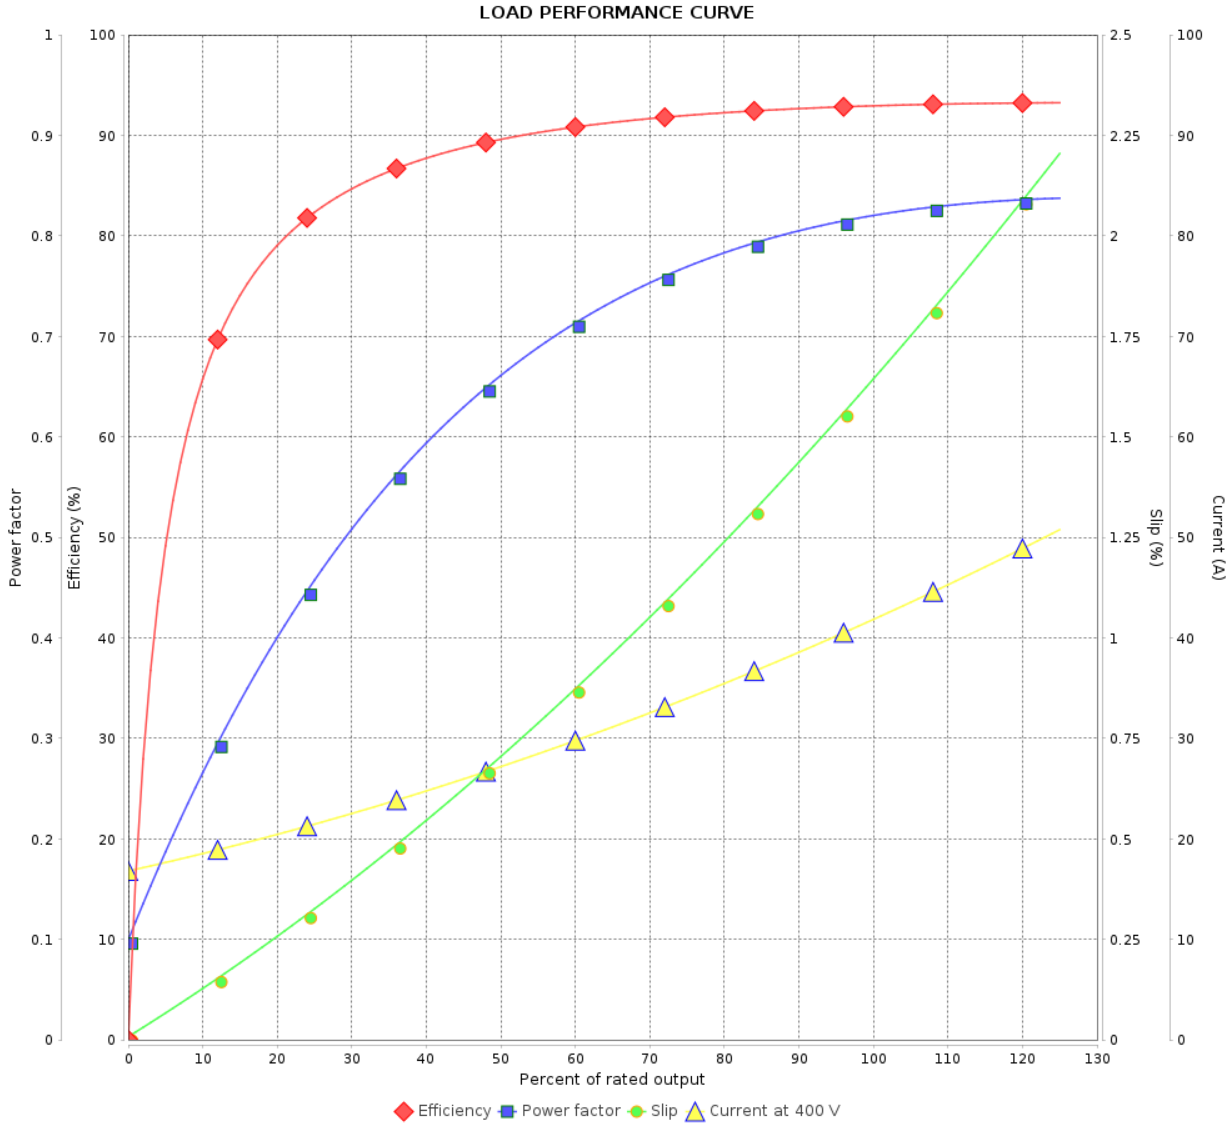

Performance : 400 V 50 Hz 4P IE3

Rated current : 41.6 A
 LRC : 7.0
 Rated torque : 14.8 kgfm
 Locked rotor torque : 270 %
 Breakdown torque : 370 %
 Rated speed : 1475 rpm

Moment of inertia (J) : 0.2551 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 4 / 8	Revision
Checked by				
Date	05/02/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : ODP NEMA Premium Efficiency Three-Phase

Product code : 12261267

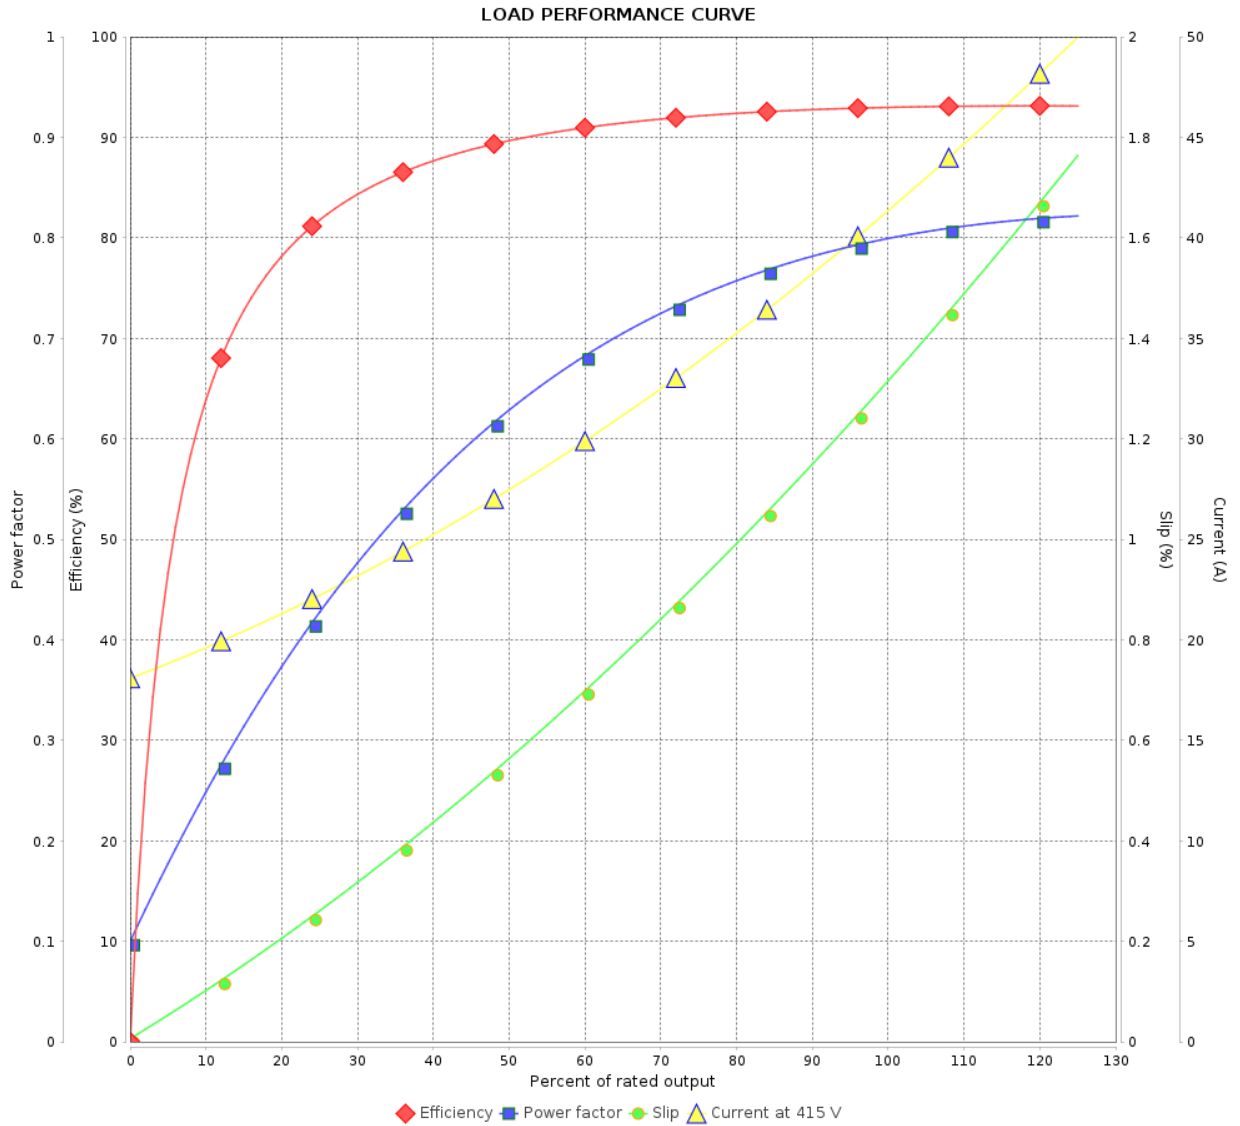

Performance : 415 V 50 Hz 4P IE3

Rated current : 41.1 A
 LRC : 7.6
 Rated torque : 14.7 kgfm
 Locked rotor torque : 290 %
 Breakdown torque : 400 %
 Rated speed : 1480 rpm

Moment of inertia (J) : 0.2551 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : ODP NEMA Premium Efficiency Three-Phase

Product code : 12261267

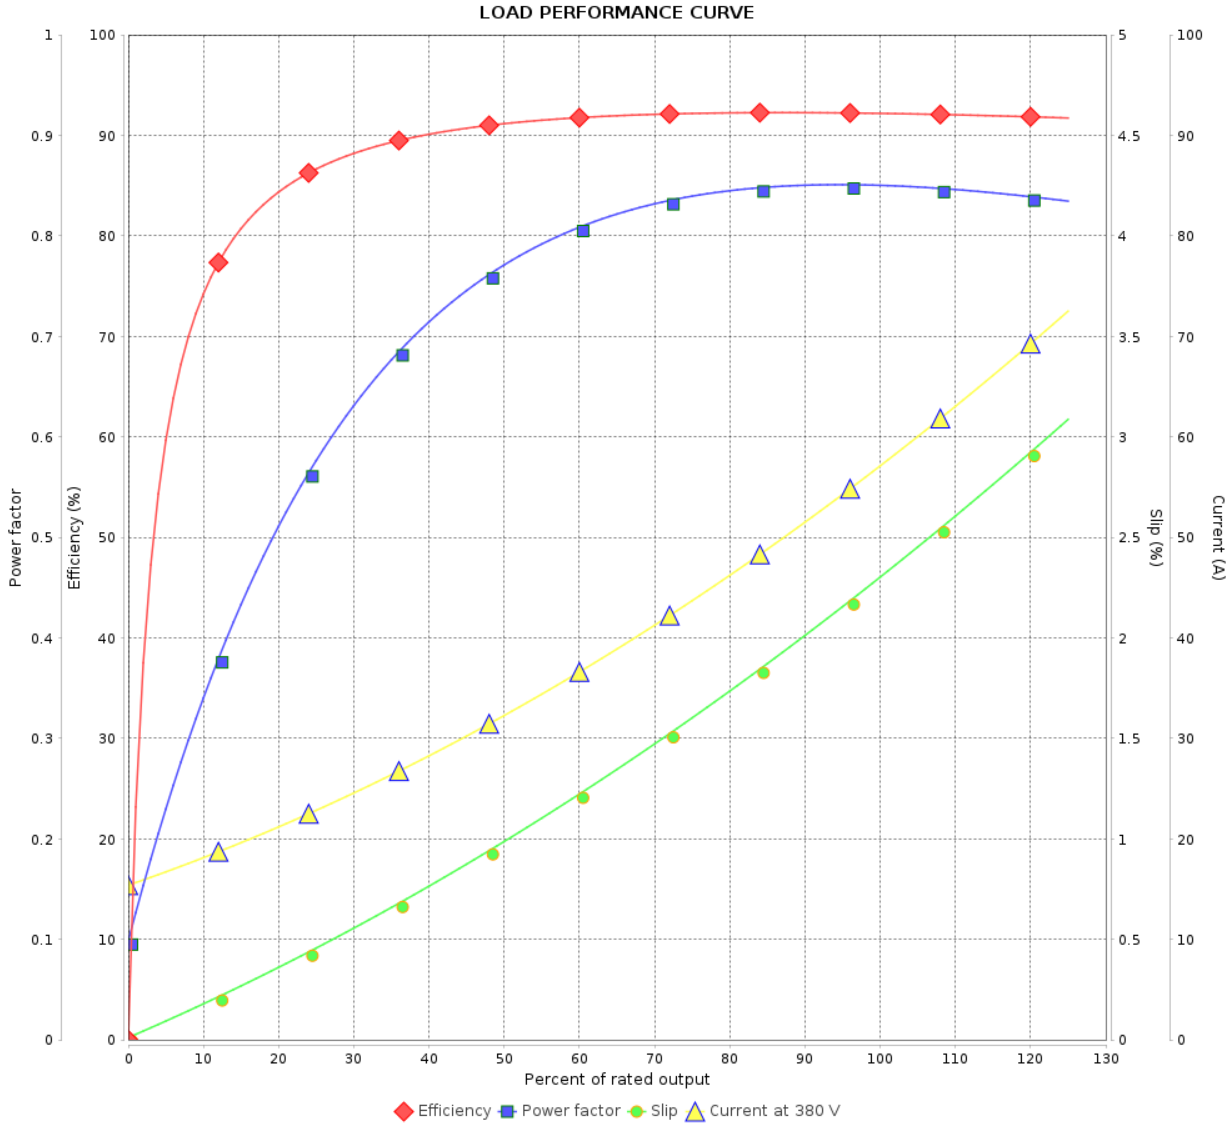

Performance : 380 V 50 Hz 4P IE2

Rated current : 58.1 A
 LRC : 4.8
 Rated torque : 19.8 kgfm
 Locked rotor torque : 180 %
 Breakdown torque : 250 %
 Rated speed : 1465 rpm

Moment of inertia (J) : 0.2551 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : ODP NEMA Premium Efficiency Three-Phase

Product code : 12261267

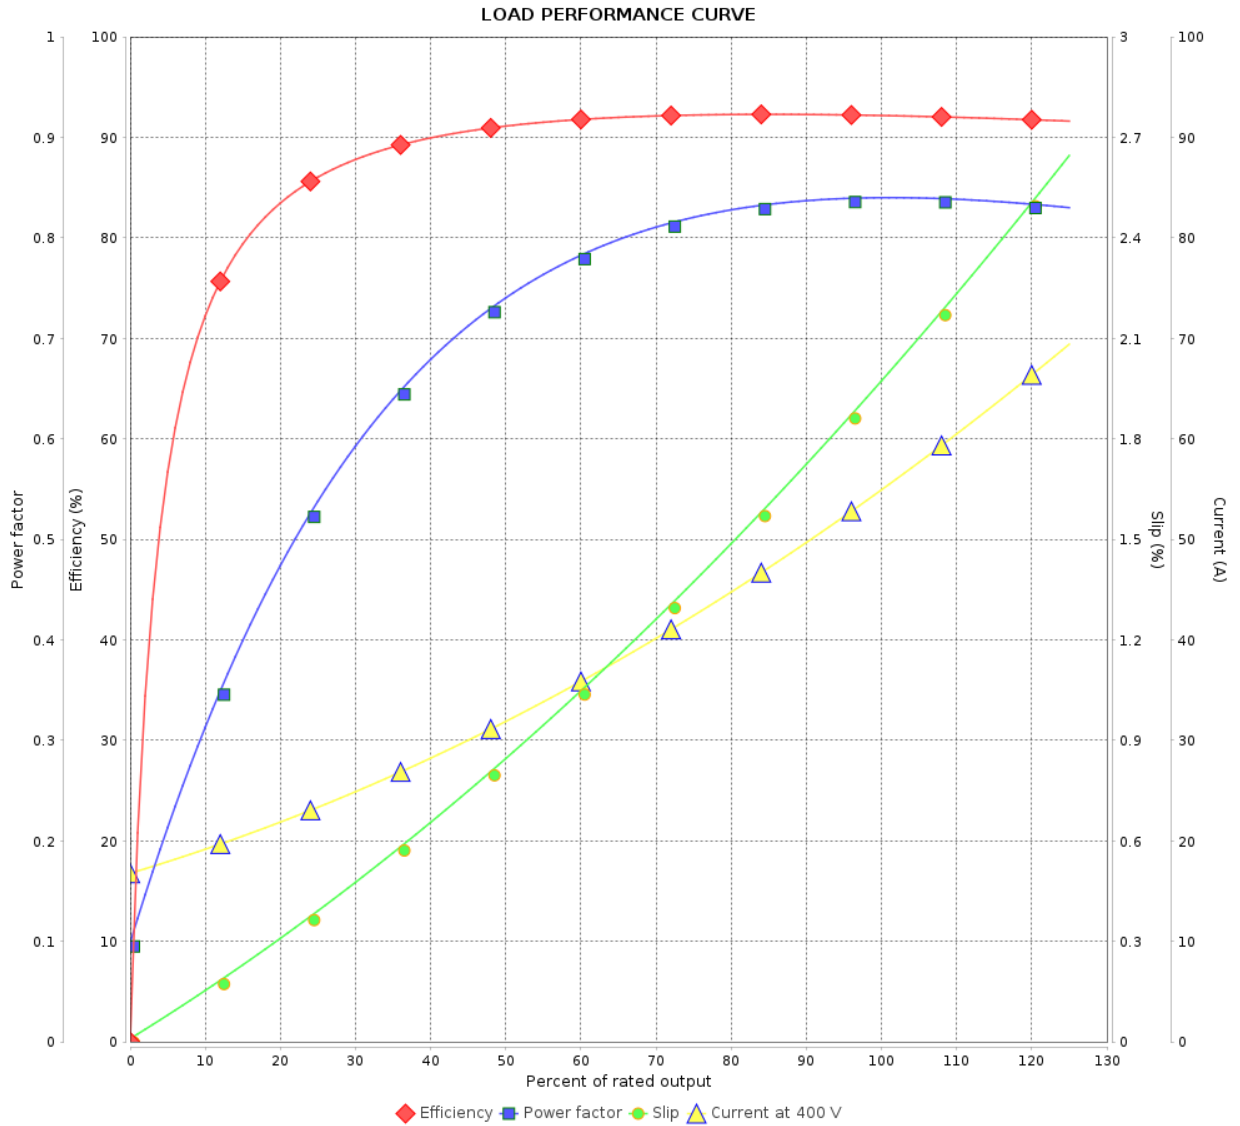

Performance : 400 V 50 Hz 4P IE2

Rated current : 55.8 A
 LRC : 5.4
 Rated torque : 19.7 kgfm
 Locked rotor torque : 200 %
 Breakdown torque : 280 %
 Rated speed : 1470 rpm

Moment of inertia (J) : 0.2551 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : ODP NEMA Premium Efficiency Three-Phase

Product code : 12261267

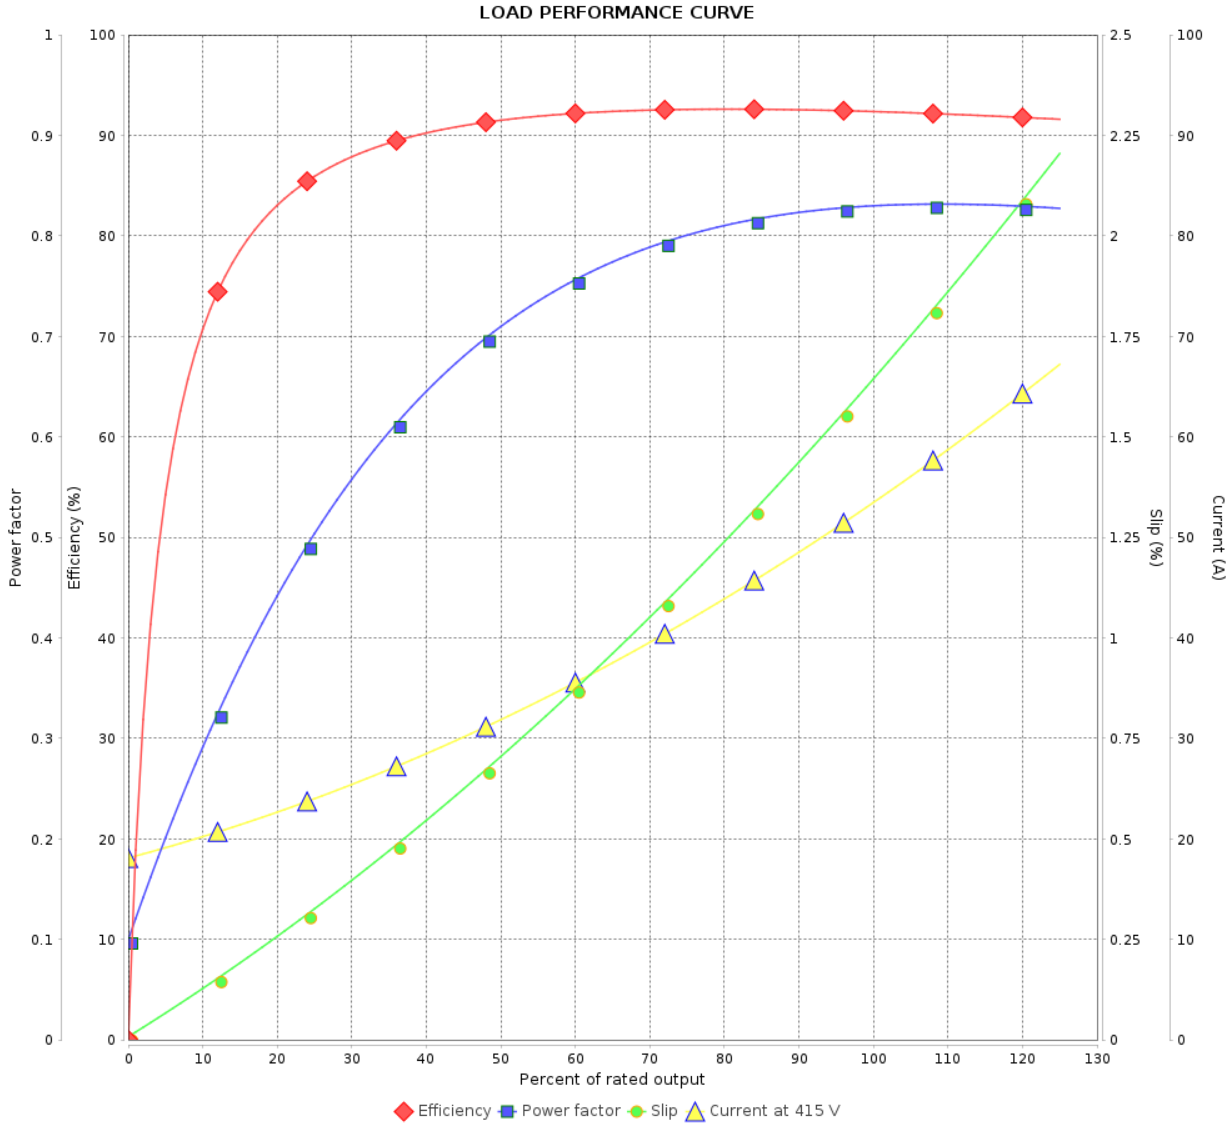

Performance : 415 V 50 Hz 4P IE2

Rated current : 54.4 A
 LRC : 5.9
 Rated torque : 19.7 kgfm
 Locked rotor torque : 220 %
 Breakdown torque : 300 %
 Rated speed : 1475 rpm

Moment of inertia (J) : 0.2551 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 8 / 8	Revision
Checked by				
Date	05/02/2024			