

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W22 Tru-Metric IE3 Three-Phase Product code : 12354352

Frame	: 80	Locked rotor time	: 48s (cold) 27s (hot)
Output	: 1.5 HP (1.1 kW)	Temperature rise	: 80 K
Poles	: 2	Duty cycle	: S1
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 230/460 V	Altitude	: 1000 m.a.s.l.
Rated current	: 4.16/2.08 A	Protection degree	: IP55
L. R. Amperes	: 38.7/19.3 A	Cooling method	: IC411 - TEFC
LRC	: 9.3	Mounting	: B34R(D)
No load current	: 2.40/1.20 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 3465 rpm	Noise level ²	: 62.0 dB(A)
Slip	: 3.75 %	Starting method	: Direct On Line
Rated torque	: 0.314 kgfm	Approx. weight ³	: 15.6 kg
Locked rotor torque	: 480 %		
Breakdown torque	: 470 %		
Insulation class	: F		
Service factor	: 1.25		
Moment of inertia (J)	: 0.0015 kgm ²		
Design	: N		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	78.5	81.5	84.0	Max. traction	: 39 kgf
Power Factor	0.60	0.71	0.79	Max. compression	: 55 kgf

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
17.4	12.3	11.0	11.7	6.6	5.3	3.3

		<u>Drive end</u>	<u>Non drive end</u>
Bearing type	:	6204 ZZ	6203 ZZ
Sealing	:	V'Ring	V'Ring
Lubrication interval	:	-	-
Lubricant amount	:	-	-
Lubricant type	:	Mobil Polyrex EM	

Notes:

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 1 / 2		Revision
Checked by				
Date	14/01/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 Tru-Metric IE3 Three-Phase

Product code : 12354352

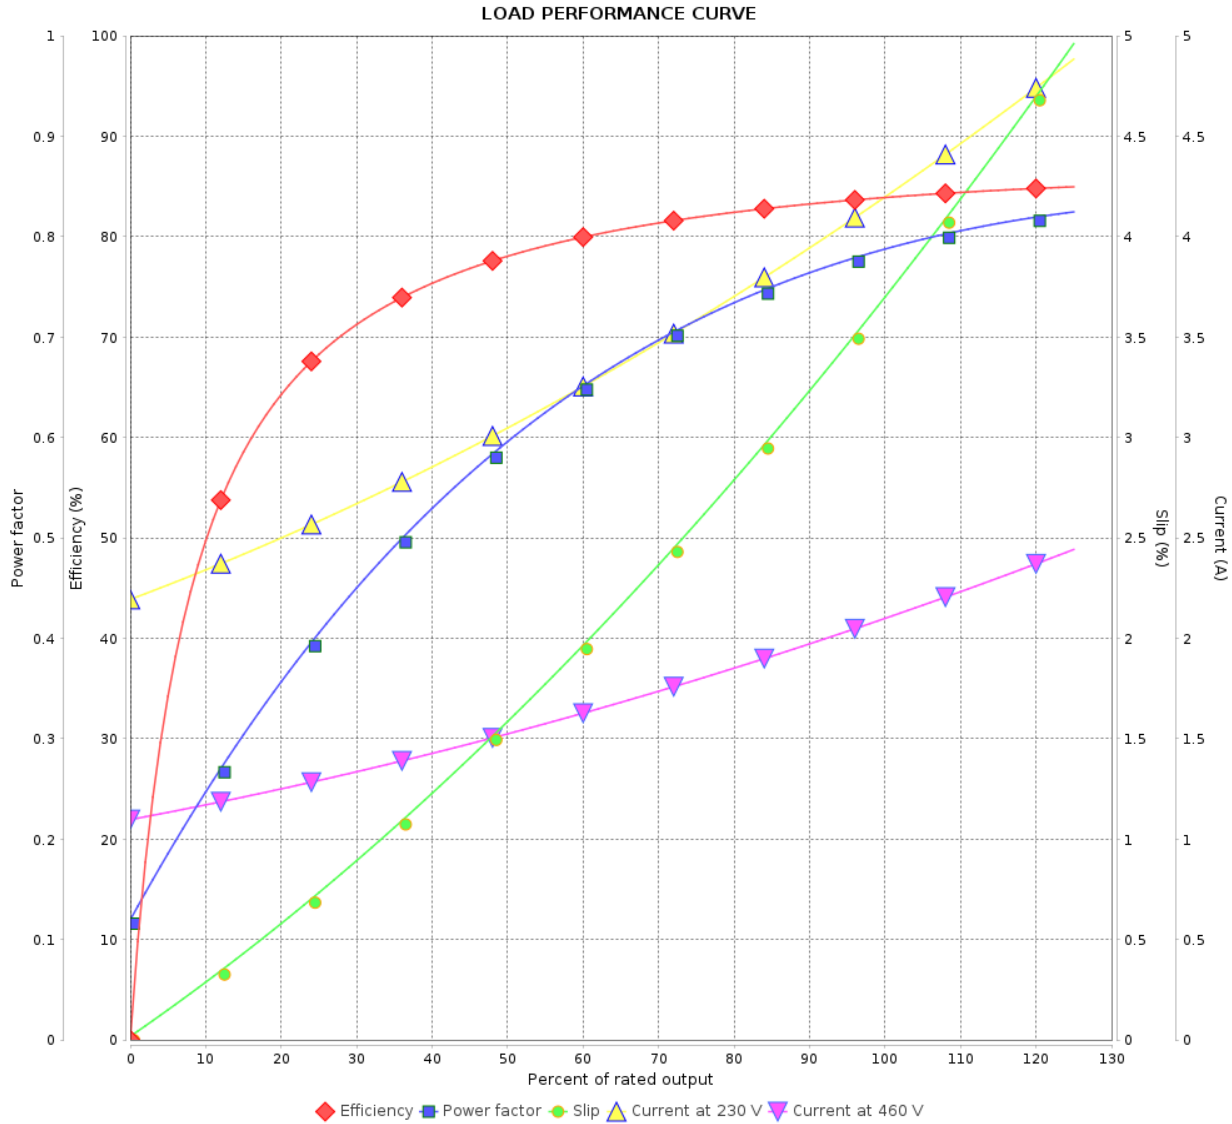

Performance : 230/460 V 60 Hz 2P

Rated current : 4.16/2.08 A
 LRC : 9.3
 Rated torque : 0.314 kgfm
 Locked rotor torque : 480 %
 Breakdown torque : 470 %
 Rated speed : 3465 rpm

Moment of inertia (J) : 0.0015 kgm²
 Duty cycle : S1
 Insulation class : F
 Service factor : 1.25
 Temperature rise : 80 K
 Design : N

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	14/01/2024			