

# DATA SHEET



## Three Phase Induction Motor - Squirrel Cage

Customer :					
Product line	: W22 IEEE 841 NEMA Premium Efficiency Three-Phase	Product code :	12424295		
Frame	: 284/6T	Cooling method	: IC411 - TEFC		
Insulation class	: F	Mounting	: F-1		
Duty cycle	: Cont.(S1)	Rotation <sup>1</sup>	: Both (CW and CCW)		
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line		
Altitude	: 1000 m.a.s.l.	Approx. weight <sup>3</sup>	: 182 kg		
Protection degree	: IP56	Moment of inertia (J)	: 0.2153 kgm <sup>2</sup>		
Design	: B				
Output [HP]	25	25	25	25	
Poles	4	4	4	4	
Frequency [Hz]	60	50	50	50	
Rated voltage [V]	460	380	400	415	
Rated current [A]	29.5	35.9	34.3	33.2	
L. R. Amperes [A]	183	190	189	196	
LRC [A]	6.2x(Code G)	5.3x(Code F)	5.5x(Code F)	5.9x(Code G)	
No load current [A]	11.0	11.0	11.7	12.4	
Rated speed [RPM]	1770	1455	1460	1465	
Slip [%]	1.67	3.00	2.67	2.33	
Rated torque [kgfm]	10.3	12.5	12.4	12.4	
Locked rotor torque [%]	240	180	200	220	
Breakdown torque [%]	270	210	240	260	
Service factor	1.25	1.00	1.00	1.00	
Temperature rise	80 K	105 K	105 K	105 K	
Locked rotor time	43s (cold) 24s (hot)	25s (cold) 14s (hot)	25s (cold) 14s (hot)	25s (cold) 14s (hot)	
Noise level <sup>2</sup>	63.0 dB(A)	61.0 dB(A)	61.0 dB(A)	61.0 dB(A)	
Efficiency (%)	25%	91.7	92.9	92.8	92.2
	50%	92.4	92.4	92.4	92.4
	75%	93.0	91.7	92.4	92.4
	100%	93.6	91.0	91.7	92.4
Power Factor	25%	0.45	0.52	0.48	0.45
	50%	0.70	0.76	0.73	0.70
	75%	0.80	0.84	0.82	0.80
	100%	0.84	0.86	0.85	0.84
Losses at normative operating points (speed;torque), in percentage of rated output power					
Losses (%)	P1 (0,9;1,0)	6.8	6.8	6.8	6.8
	P2 (0,5;1,0)	5.8	5.8	5.8	5.8
	P3 (0,25;1,0)	5.3	5.3	5.3	5.3
	P4 (0,9;0,5)	3.1	3.1	3.1	3.1
	P5 (0,5;0,5)	2.2	2.2	2.2	2.2
	P6 (0,5;0,25)	1.4	1.4	1.4	1.4
	P7 (0,25;0,25)	1.0	1.0	1.0	1.0
Bearing type	: Drive end : 6311 C3 Non drive end : 6211 C3	Foundation loads			
Sealing	: Inpro/Seal Inpro/Seal	Max. traction : 370 kgf			
Lubrication interval	: 20000 h 20000 h	Max. compression : 551 kgf			
Lubricant amount	: 18 g 11 g				
Lubricant type	: Mobil Polyrex EM				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by				Page	Revision
Date	15/01/2024			1 / 6	

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Notes

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	15/01/2024		2 / 6	


# LOAD PERFORMANCE CURVE

## Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase      Product code : 12424295

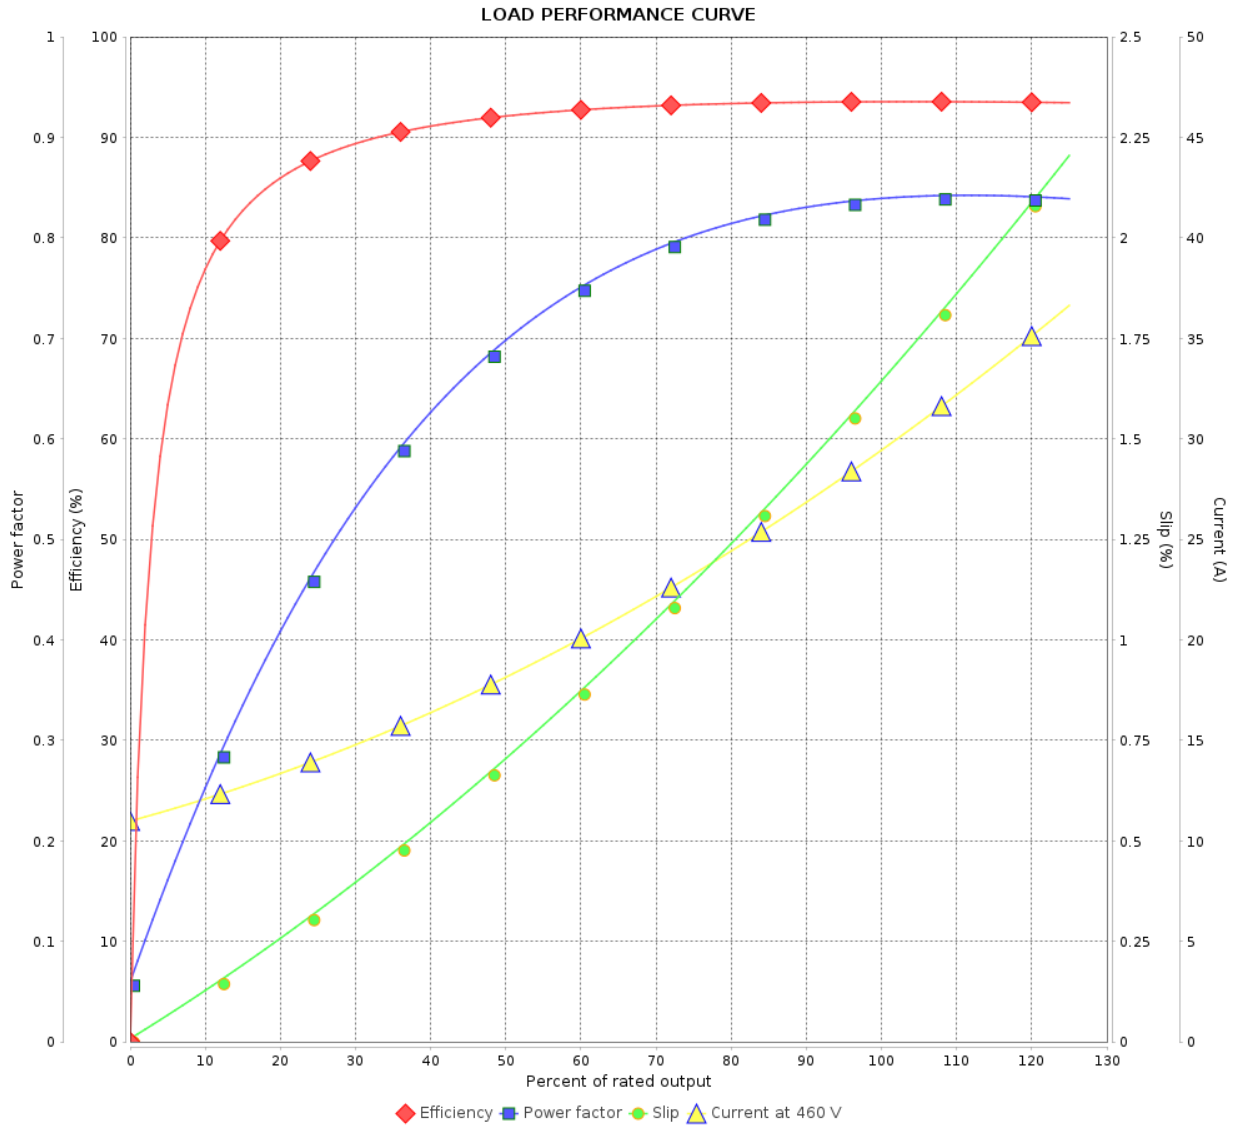

Performance : 460 V 60 Hz 4P

Rated current	: 29.5 A	Moment of inertia (J)	: 0.2153 kgm <sup>2</sup>
LRC	: 6.2	Duty cycle	: Cont.(S1)
Rated torque	: 10.3 kgfm	Insulation class	: F
Locked rotor torque	: 240 %	Service factor	: 1.25
Breakdown torque	: 270 %	Temperature rise	: 80 K
Rated speed	: 1770 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 3 / 6	Revision
Checked by				
Date	15/01/2024			

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase      Product code : 12424295

LOAD PERFORMANCE CURVE

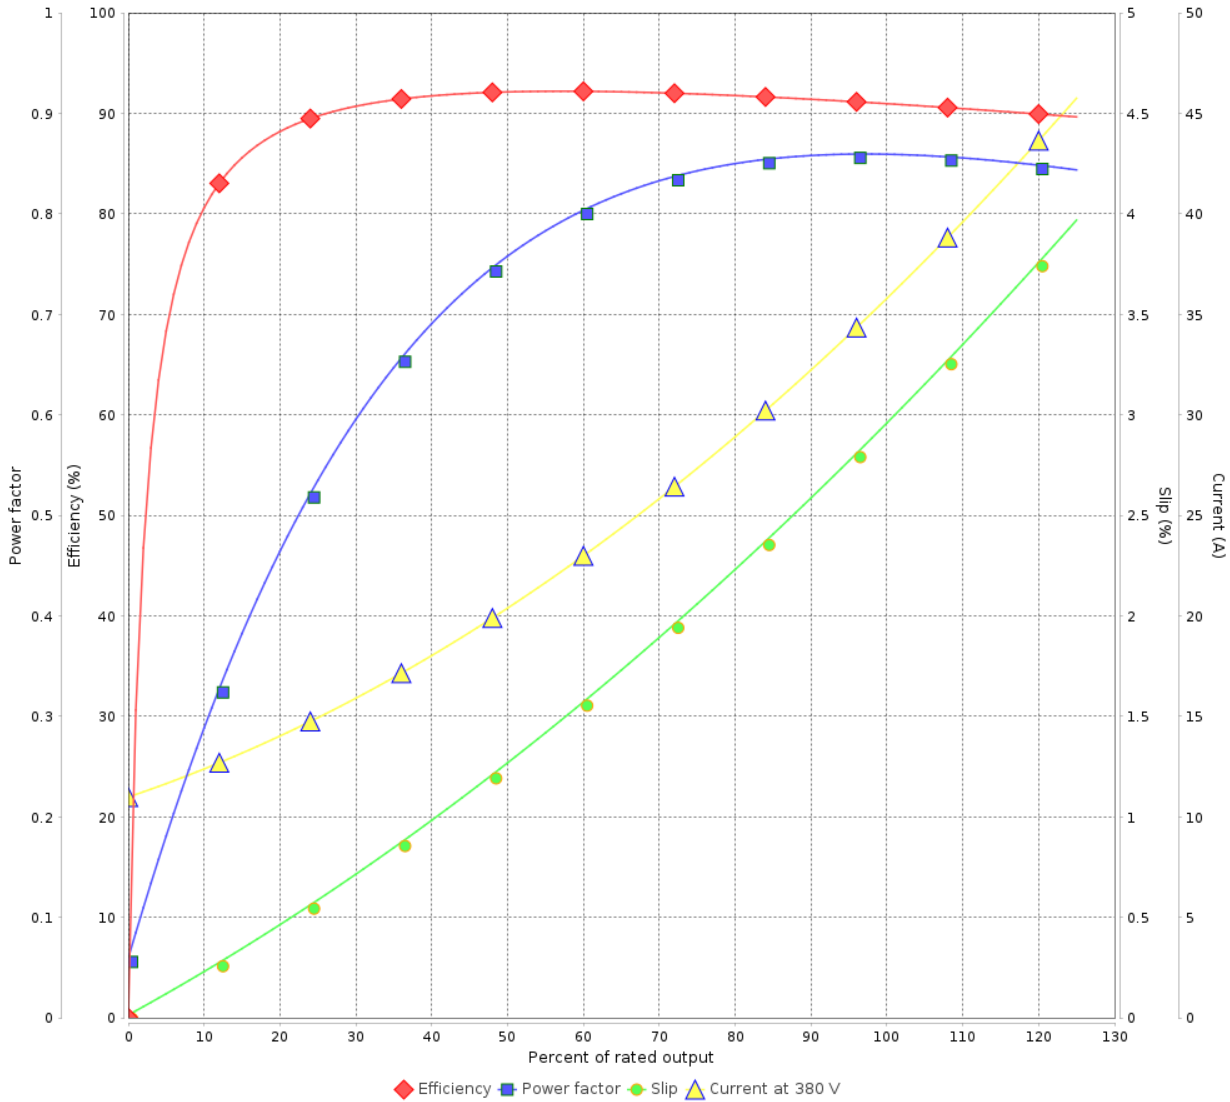

Performance : 380 V 50 Hz 4P IE1

Rated current	: 35.9 A	Moment of inertia (J)	: 0.2153 kgm <sup>2</sup>
LRC	: 5.3	Duty cycle	: Cont.(S1)
Rated torque	: 12.5 kgfm	Insulation class	: F
Locked rotor torque	: 180 %	Service factor	: 1.00
Breakdown torque	: 210 %	Temperature rise	: 105 K
Rated speed	: 1455 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		4 / 6		
Date	15/01/2024			


# LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase      Product code : 12424295

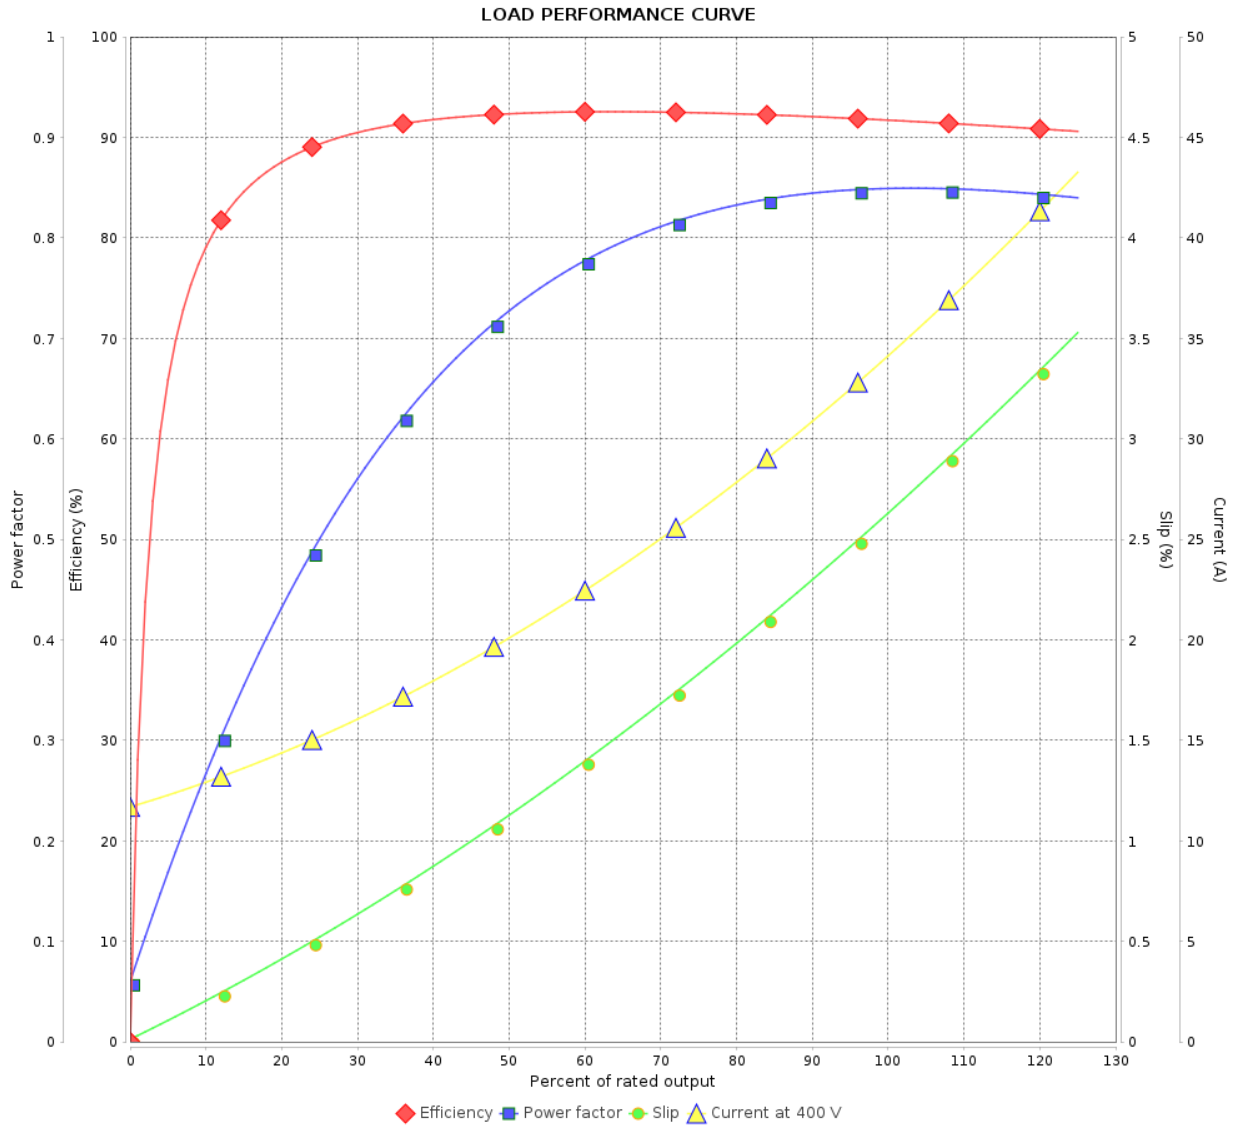

Performance : 400 V 50 Hz 4P IE2

Rated current	: 34.3 A	Moment of inertia (J)	: 0.2153 kgm <sup>2</sup>
LRC	: 5.5	Duty cycle	: Cont.(S1)
Rated torque	: 12.4 kgfm	Insulation class	: F
Locked rotor torque	: 200 %	Service factor	: 1.00
Breakdown torque	: 240 %	Temperature rise	: 105 K
Rated speed	: 1460 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 5 / 6	Revision
Checked by				
Date	15/01/2024			

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase      Product code : 12424295

LOAD PERFORMANCE CURVE

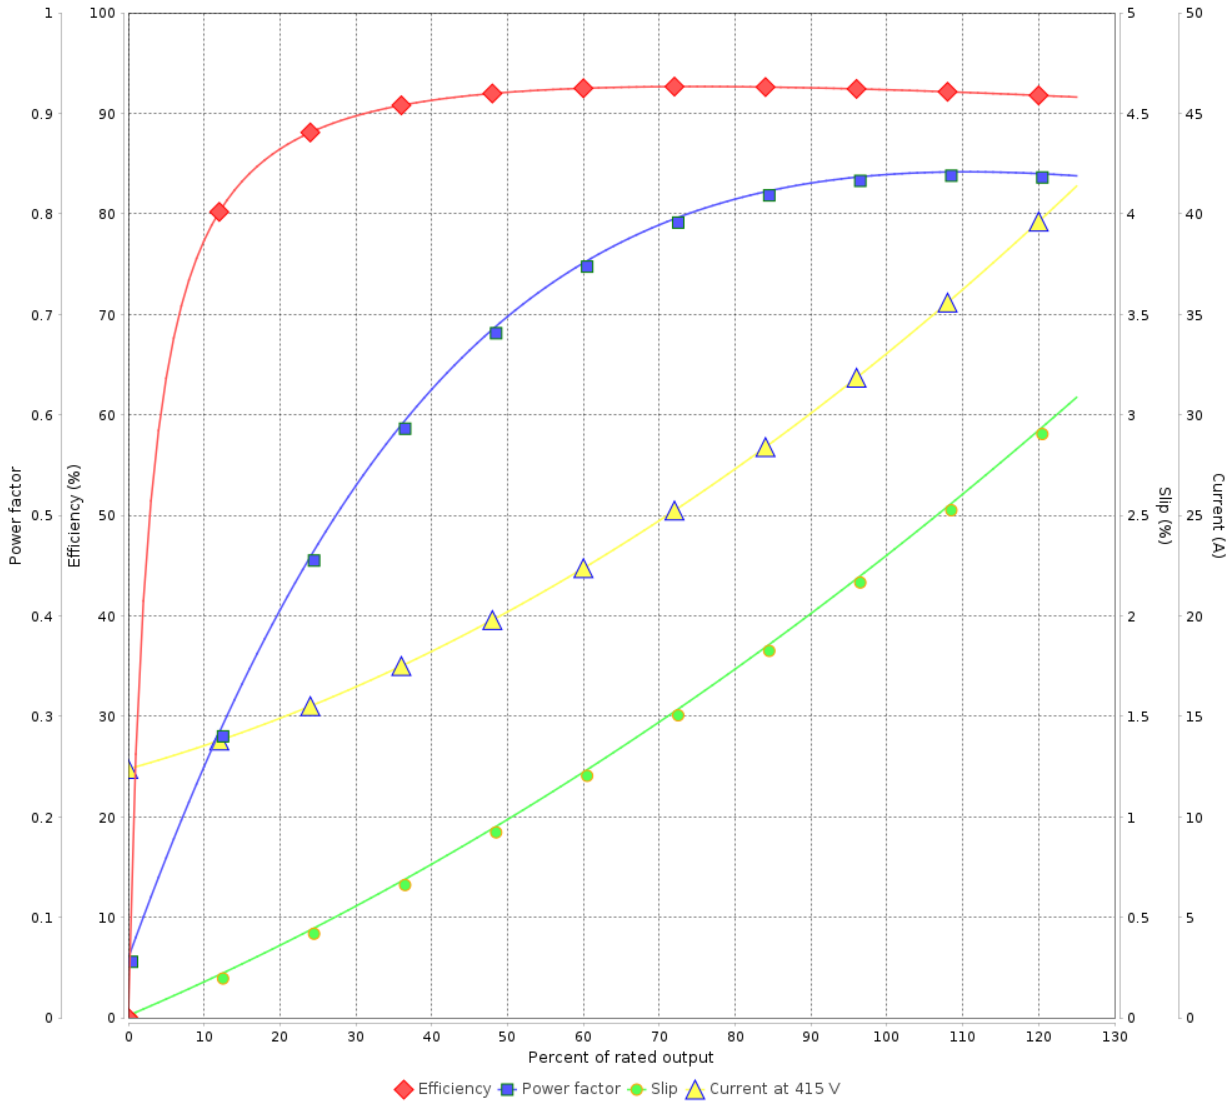

Performance : 415 V 50 Hz 4P IE2

Rated current	: 33.2 A	Moment of inertia (J)	: 0.2153 kgm <sup>2</sup>
LRC	: 5.9	Duty cycle	: Cont.(S1)
Rated torque	: 12.4 kgfm	Insulation class	: F
Locked rotor torque	: 220 %	Service factor	: 1.00
Breakdown torque	: 260 %	Temperature rise	: 105 K
Rated speed	: 1465 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	15/01/2024		6 / 6	