DATA SHEET

Three Phase Induction Motor - Squirrel Cage

Customer	:
Sales document	: 1773532-000010

Product line	: Special Motor
Product code	: 12465079

Frame	: 444/5LP
Output	: 125 HP (90 kW)
Poles	: 4
Frequency	: 60 Hz
Rated voltage	: 575 V
Rated current	: 110 A
L. R. Amperes	: 704 A
LRC	: 6.4 Code G
No load current	: 37.0 A
Rated speed	: 1785 rpm
Slip	: 0.83 %
Rated torque	: 50.8 kgfm
Locked rotor torque	: 200 %
Pull up torque	: 170 %
Breakdown torque	: 220 %
Insulation class	: F
Service factor	: 1.15
Moment of inertia (J)	: 2.41 kgm²

Locked rotor time	: 18 s (hot) 0 s (cold)
Temperature rise[4]	: 80 K
Duty cycle	: S1
Ambient temperature	: -20 °C to +40 °C
Altitude	: 1000 m.a.s.l
Protection degree	: IP55
Cooling method	: IC411 - TEFC
Mounting	: V1
Rotation[1]	: Both
Noise level[2]	: 76 dB(A)
Starting method	: Direct On Line
Approx. weight[3]	: 833 kg
Design	: B

Output	Start	50%	75%	100%
Efficiency (%)	-	95.0	95.4	95.4
Power Factor	0.00	0.76	0.83	0.86

Load type	: -
Load torque	: -
Load inertia (J=GD²/4)	: -

	Drive end	Non drive end
Bearing type	6314	7315BECB
Lubrication interval	4895 h	3268 h
Lubricant amount	27 g	30 g
Lubricant type	MOBIL POLYREX EM	

Notes:
NEMA Premium Efficiency
IN LINE EXTRA THRUST

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
0.00	0.00	0.00	0.00	0.00	0.00	0.00

Standards

Specification	: MG1 - Part 10	Vibration	: MG1 - Part 7
Test	: MG1 - Part 12	Tolerance	: MG1 - Part 12
Noise	: MG1 - Part 9		

This revision replaces and cancel the previous one, which must be eliminated..
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +0dB(A).
(3) Approximate weight, subject to be changed after manufacturing process.
(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary	Performed	Checked	Date
				14/06/2013

Performed by	natashas	86910/2013	
Checked by	lais	Page	Revision
Date	13/06/2013	1/2	1

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage

Customer	:
Sales document	: 1773532-000010
Product line	: Special Motor
Product code	: 12465079

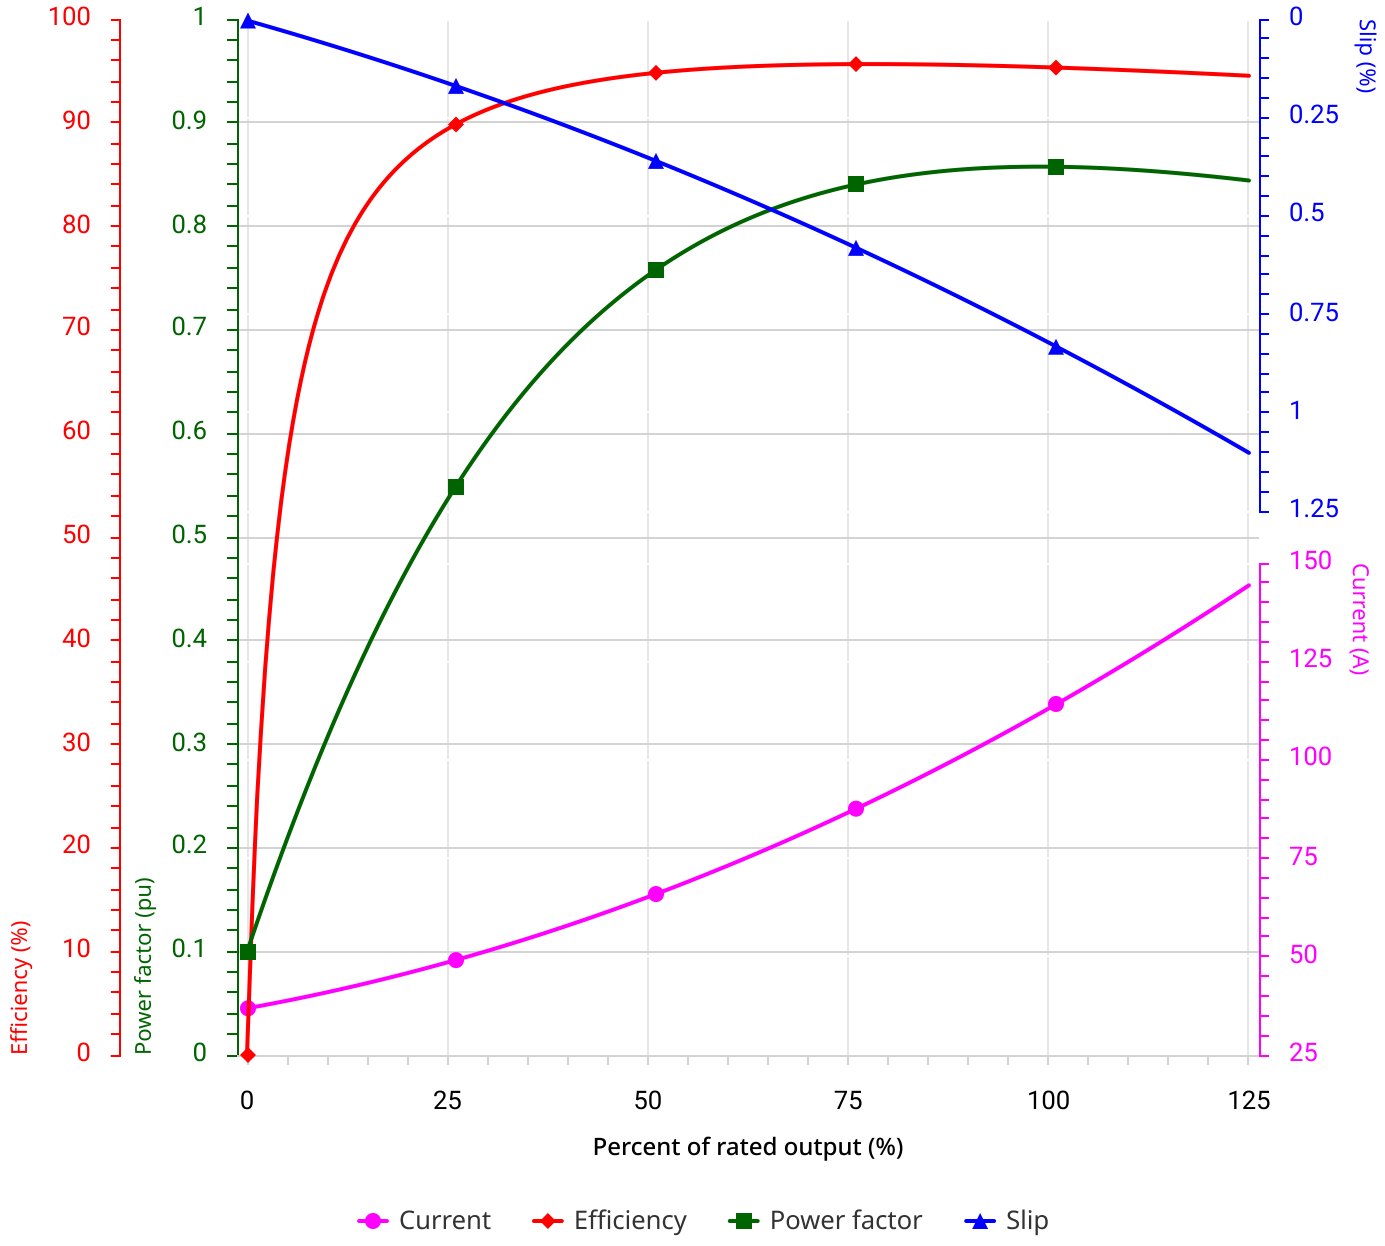

Performance	: 125 HP (90 kW) 575V 60Hz 4P 444/5LP		
Rated current	: 110 A	Moment of inertia (J)	: 2.41 kgm²
LRC	: 6.4 Code G	Duty cycle	: Cont.(S1)
Rated torque	: 50.8 kgfm	Insulation class	: F
Locked rotor torque	: 200 %	Service factor	: 1.15
Breakdown torque	: 220 %	Temperature rise	: 80 K
Rated speed	: 1785 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
				14/06/2013

Performed by	natashas		86910/2013	
Checked by	lais		Page	Revision
Date	13/06/2013		2/2	1

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.