

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer	:				
Product line	: NEMA Premium Efficiency Three-Phase	Product code :	12630368		
Frame	: 182/4T	Cooling method	: IC01 - ODP		
Insulation class	: F	Mounting	: F-1		
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)		
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line		
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 31.3 kg		
Design	: B	Moment of inertia (J)	: 0.0130 kgm ²		
Output [HP]	3				
Poles	4				
Frequency [Hz]	60				
Rated voltage [V]	575				
Rated current [A]	3.09				
L. R. Amperes [A]	25.9				
LRC [A]	8.4x(Code K)				
No load current [A]	1.66				
Rated speed [RPM]	1765				
Slip [%]	1.94				
Rated torque [kgfm]	1.23				
Locked rotor torque [%]	220				
Breakdown torque [%]	330				
Service factor	1.15				
Temperature rise	80 K				
Locked rotor time	27s (cold) 15s (hot)				
Noise level ²	55.0 dB(A)				
Efficiency (%)	25%	86.4			
	50%	87.5			
	75%	88.5			
	100%	89.5			
Power Factor	25%	0.35			
	50%	0.60			
	75%	0.73			
	100%	0.80			
Bearing type	: Drive end	Non drive end	Foundation loads		
Sealing	: 6206 ZZ	6205 ZZ	Max. traction	: 69 kgf	
Lubrication interval	: Without	Without	Max. compression	: 101 kgf	
Lubricant amount	: Bearing Seal	Bearing Seal			
Lubricant type	: -	-			
Notes					
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by					
Date	13/05/2022			Page	Revision
				1 / 2	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : NEMA Premium Efficiency Three-Phase Product code : 12630368

LOAD PERFORMANCE CURVE

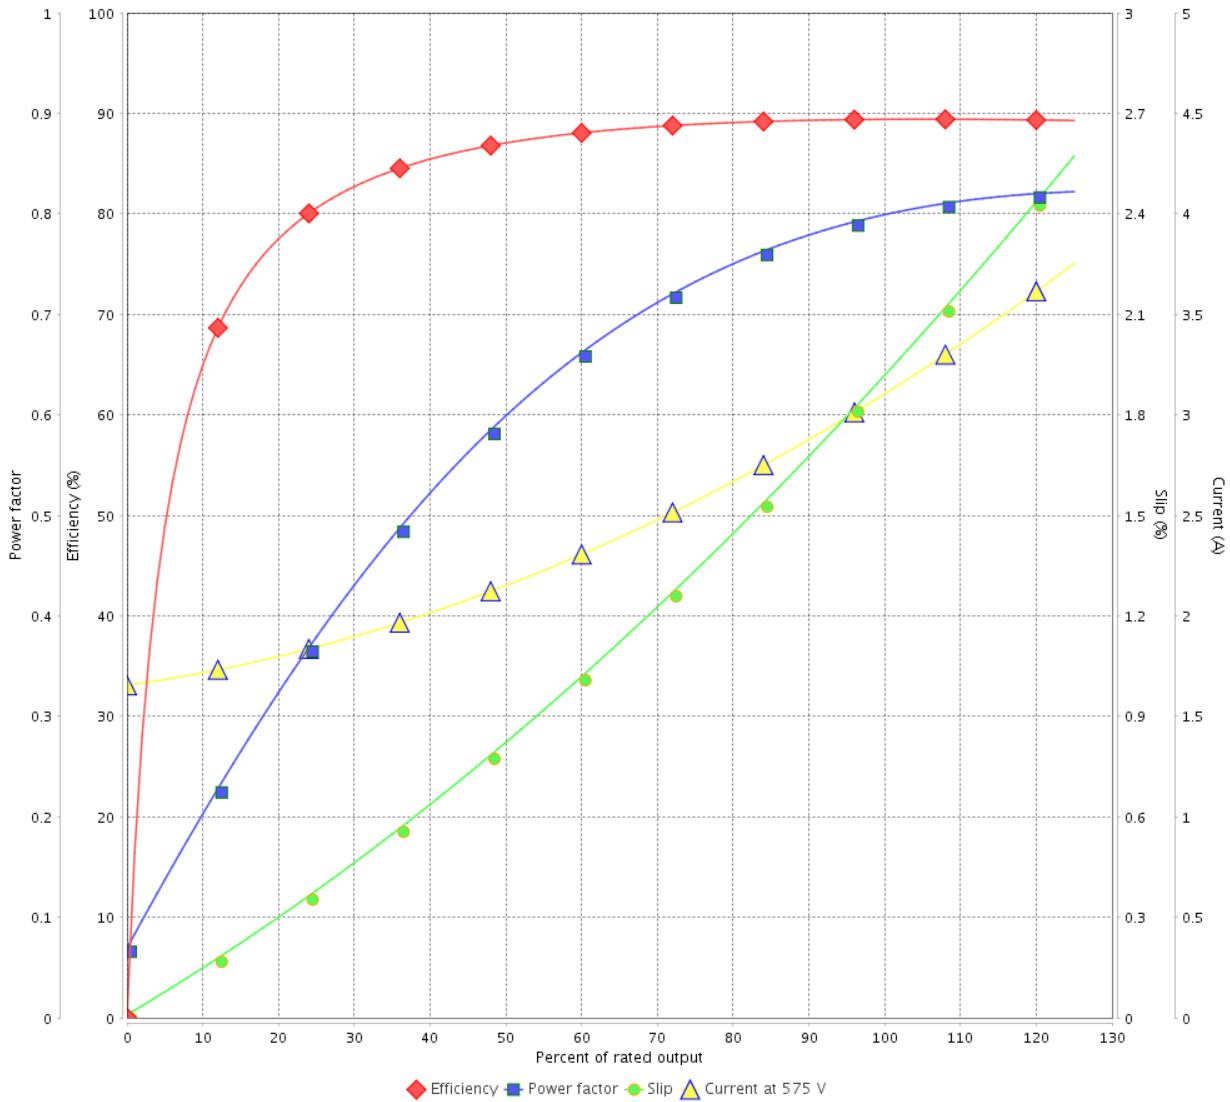

Performance : 575 V 60 Hz 4P

Rated current : 3.09 A
 LRC : 8.4
 Rated torque : 1.23 kgfm
 Locked rotor torque : 220 %
 Breakdown torque : 330 %
 Rated speed : 1765 rpm

Moment of inertia (J) : 0.0130 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	13/05/2022			