DATA SHEET

Three Phase Induction Motor - Squirrel Cage

Customer	:

Product line	: W01 - TEFC - Nema Premium Efficiency Derating
Product code	: 12651247

Frame	: 213/5TC	Locked rotor time	: 15 s (hot) 27 s (cold)
Output	: 10 HP (7.5 kW)	Temperature rise[4]	: 80 K
Poles	: 4	Duty cycle	: S1
Frequency	: 60 Hz	Ambient temperature	: -20 °C to +40 °C
Rated voltage	: 230/460 V	Altitude	: 1000 m.a.s.l
Rated current	: 24.2/12.1 A	Protection degree	: IP55
L. R. Amperes	: 176/88.2 A	Cooling method	: IC411 - TEFC
LRC	: 7.3 Code H	Mounting	: F-1/B34R(D)
No load current	: 10.8/5.40 A	Rotation[1]	: Both
Rated speed	: 1770 rpm	Noise level[2]	: 60 dB(A)
Slip	: 1.67 %	Starting method	: Direct On Line
Rated torque	: 4.10 kgfm	Approx. weight[3]	: 57.8 kg
Locked rotor torque	: 210 %	Design	: B
Pull up torque	: 225 %		
Breakdown torque	: 290 %		
Insulation class	: F		
Service factor	: 1.15		
Moment of inertia (J)	: 0.0451 kgm²		

Output	Start	50%	75%	100%
Efficiency (%)	-	90.2	91.0	91.7
Power Factor	0.55	0.68	0.80	0.85

Load type	: -
Load torque	: -
Load inertia (J=GD²/4)	: -

	Drive end	Non drive end
Bearing type	6208-ZZ	6206-ZZ
Lubrication interval	-	-
Lubricant amount	-	-
Lubricant type	MOBIL POLYREX EM	

Notes:

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
8.80	7.69	7.33	4.23	3.04	2.02	1.48

Standards

Specification	: MG1 - Part 10	Vibration	: MG1 - Part 7
Test	: MG1 - Part 12	Tolerance	: MG1 - Part 12
Noise	: MG1 - Part 9		

This revision replaces and cancel the previous one, which must be eliminated..
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +0dB(A).
(3) Approximate weight, subject to be changed after manufacturing process.
(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary	Performed	Checked	Date
				2026/11/01


Performed by				
Checked by			Page	Revision
Date	2026/11/01		1/2	0

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage

Customer	:
Product line	: W01 - TEFC - Nema Premium Efficiency Derating
Product code	: 12651247

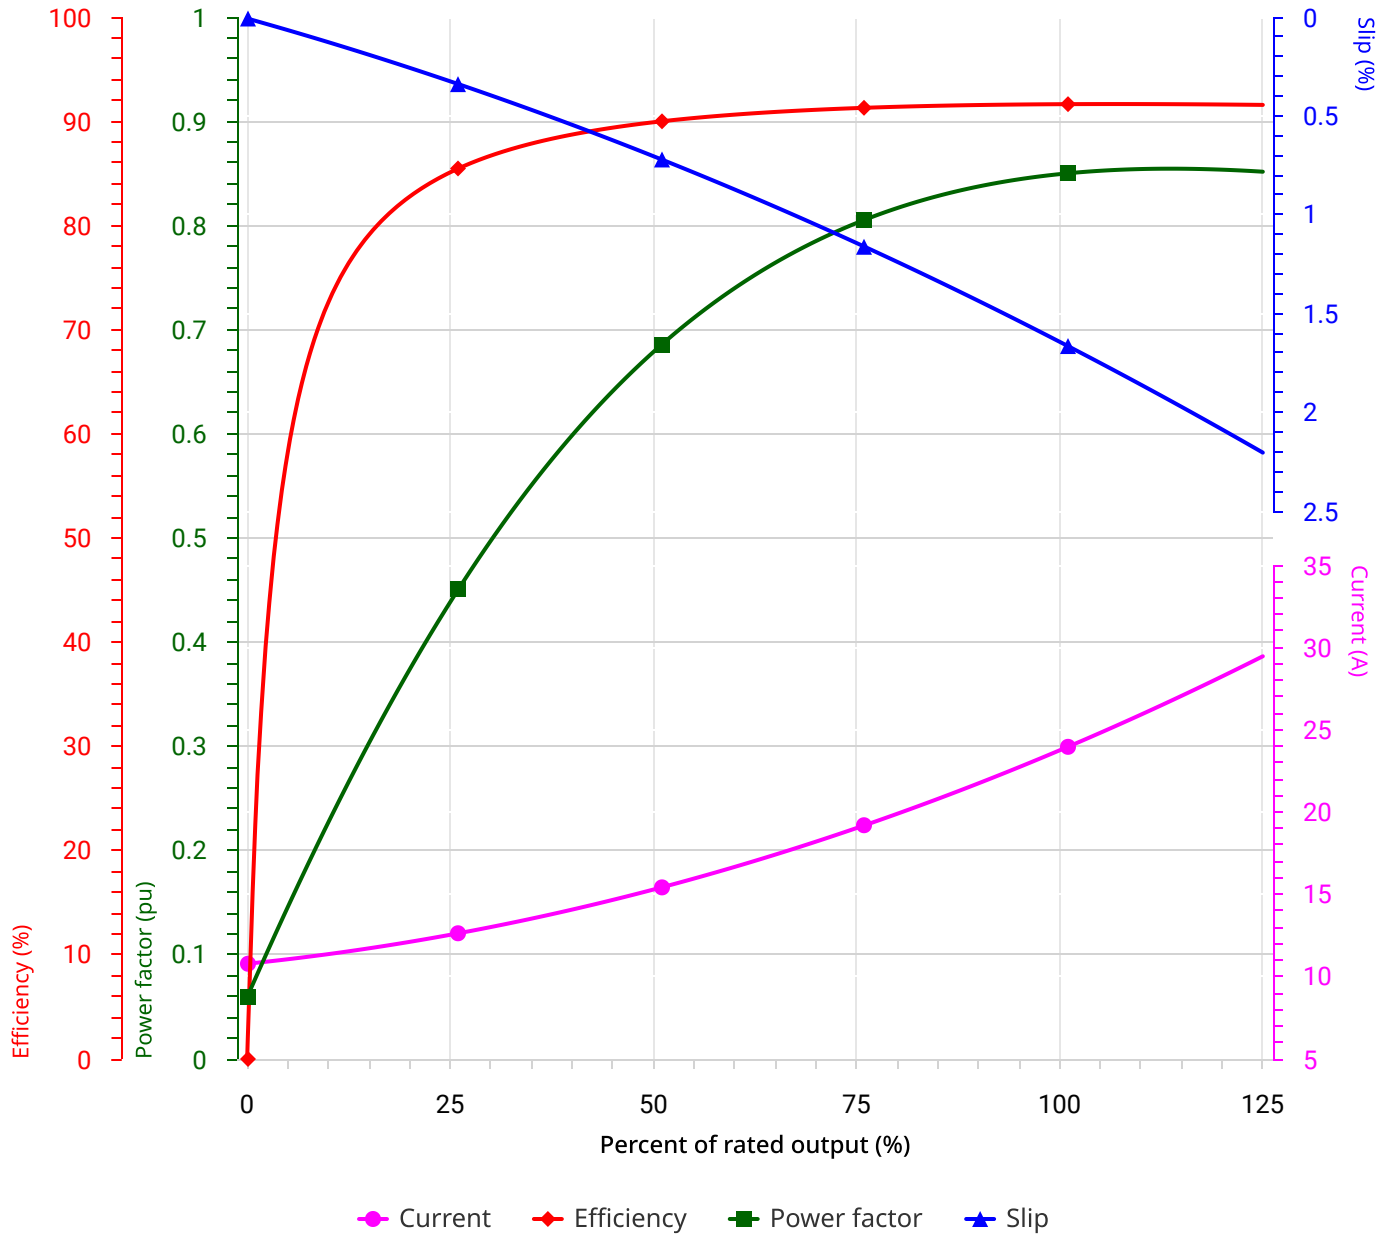

Performance	: 10 HP (7.5 kW) 208/230/460V 60Hz 4P 213/5TC

Rated current	: 27.0/24.2/12.1 A	Moment of inertia (J)	: 0.0451 kgm²
LRC	: 7.3 Code H	Duty cycle	: Cont.(S1)
Rated torque	: 4.10 kgfm	Insulation class	: F
Locked rotor torque	: 210 %	Service factor	: 1.15
Breakdown torque	: 290 %	Temperature rise	: 80 K
Rated speed	: 1770 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
				2026/11/01

Performed by				
Checked by			Page	Revision
Date	2026/11/01		2/2	0

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.