

# DATA SHEET



## Three Phase Induction Motor - Squirrel Cage

Customer	:			
Product line	: NEMA Premium Efficiency Three-Phase	Product code : 12675406		
Frame	: 213/5T	Cooling method : IC411 - TEFC		
Insulation class	: F	Mounting : F-1		
Duty cycle	: Cont.(S1)	Rotation <sup>1</sup> : Both (CW and CCW)		
Ambient temperature	: -20°C to +40°C	Starting method : Direct On Line		
Altitude	: 1000 m.a.s.l.	Approx. weight <sup>3</sup> : 55.1 kg		
Protection degree	: IP55	Moment of inertia (J) : 0.0395 kgm <sup>2</sup>		
Design	: B			
Output [HP]		7.5		
Poles		4		
Frequency [Hz]		60		
Rated voltage [V]		575		
Rated current [A]		7.26		
L. R. Amperes [A]		53.0		
LRC [A]		7.3x(Code H)		
No load current [A]		3.52		
Rated speed [RPM]		1770		
Slip [%]		1.67		
Rated torque [kgfm]		3.08		
Locked rotor torque [%]		260		
Breakdown torque [%]		300		
Service factor		1.15		
Temperature rise		80 K		
Locked rotor time		39s (cold) 22s (hot)		
Noise level <sup>2</sup>		60.0 dB(A)		
Efficiency (%)	25%	89.4		
	50%	90.2		
	75%	91.0		
	100%	91.7		
Power Factor	25%	0.39		
	50%	0.64		
	75%	0.76		
	100%	0.82		
Bearing type	: <u>Drive end</u> 6208 ZZ <u>Non drive end</u> 6206 ZZ	Foundation loads		
Sealing	: V'Ring    Without Bearing Seal	Max. traction : 143 kgf		
Lubrication interval	: -    -	Max. compression : 198 kgf		
Lubricant amount	: -    -			
Lubricant type	: Mobil Polyrex EM			
Notes				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.		These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	13/05/2022		1 / 2	

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : NEMA Premium Efficiency Three-Phase      Product code : 12675406

LOAD PERFORMANCE CURVE

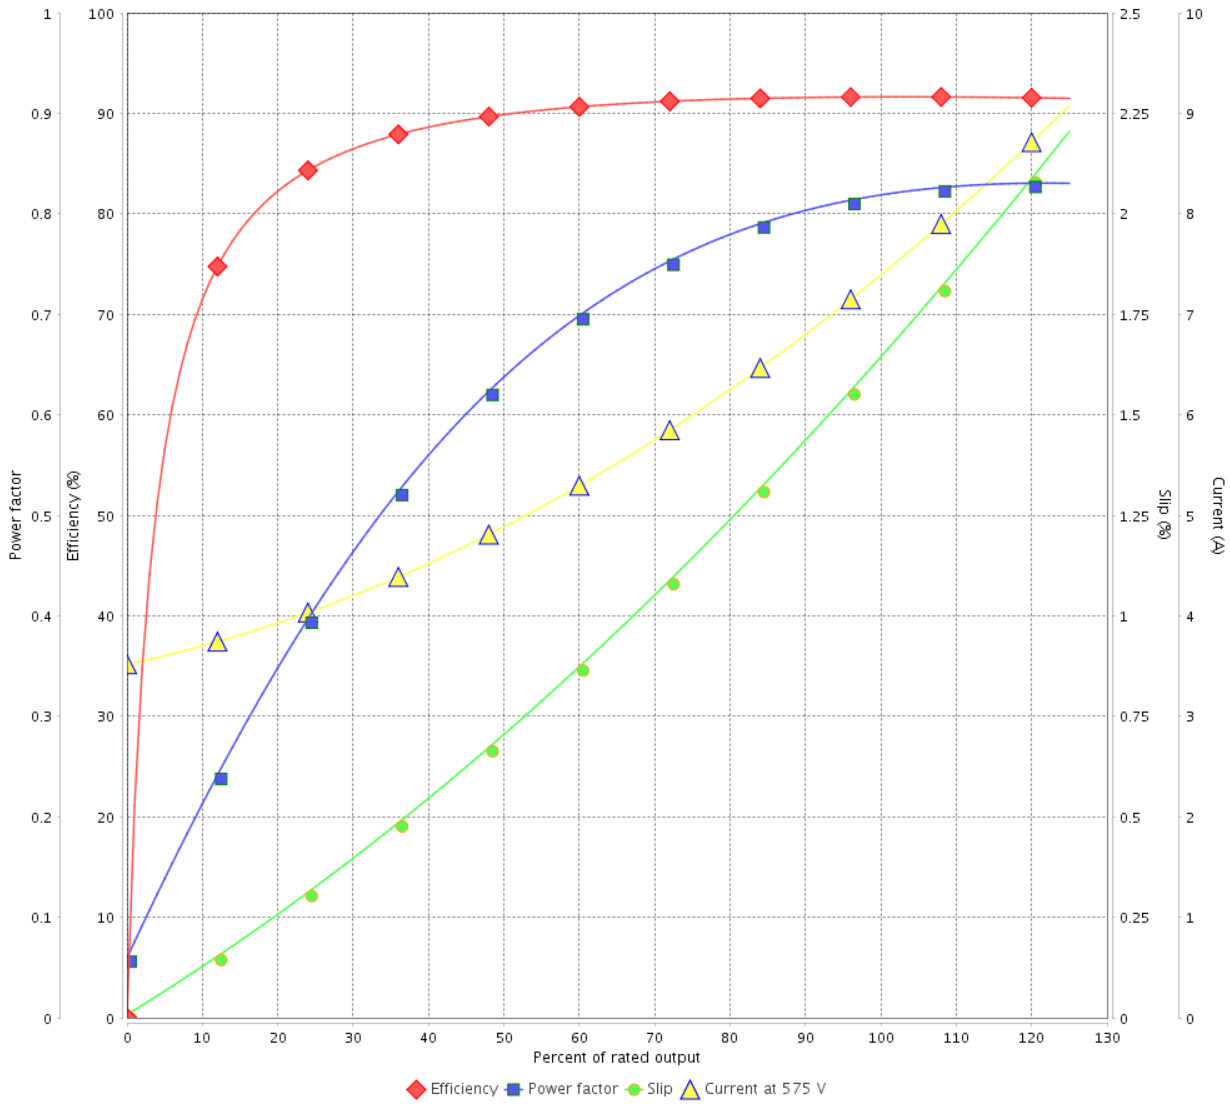

Performance : 575 V 60 Hz 4P

Rated current	: 7.26 A	Moment of inertia (J)	: 0.0395 kgm <sup>2</sup>
LRC	: 7.3	Duty cycle	: Cont.(S1)
Rated torque	: 3.08 kgfm	Insulation class	: F
Locked rotor torque	: 260 %	Service factor	: 1.15
Breakdown torque	: 300 %	Temperature rise	: 80 K
Rated speed	: 1770 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	13/05/2022			