

# DATA SHEET



## Three Phase Induction Motor - Squirrel Cage

Customer	:				
Product line	: NEMA Premium Efficiency Three-Phase	Product code :	12675409		
Frame	: 143/5T	Cooling method	: IC411 - TEFC		
Insulation class	: F	Mounting	: F-1		
Duty cycle	: Cont.(S1)	Rotation <sup>1</sup>	: Both (CW and CCW)		
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line		
Altitude	: 1000 m.a.s.l.	Approx. weight <sup>3</sup>	: 17.5 kg		
Protection degree	: IP55	Moment of inertia (J)	: 0.0067 kgm <sup>2</sup>		
Design	: B				
Output [HP]	1				
Poles	6				
Frequency [Hz]	60				
Rated voltage [V]	575				
Rated current [A]	1.26				
L. R. Amperes [A]	7.33				
LRC [A]	5.8x(Code J)				
No load current [A]	0.810				
Rated speed [RPM]	1145				
Slip [%]	4.58				
Rated torque [kgfm]	0.634				
Locked rotor torque [%]	229				
Breakdown torque [%]	280				
Service factor	1.15				
Temperature rise	80 K				
Locked rotor time	55s (cold) 31s (hot)				
Noise level <sup>2</sup>	50.0 dB(A)				
Efficiency (%)	25%				
	50%	80.0			
	75%	82.5			
	100%	82.5			
Power Factor	25%				
	50%	0.50			
	75%	0.63			
	100%	0.72			
Bearing type	: <u>Drive end</u> 6205 ZZ	<u>Non drive end</u> 6203 ZZ	Foundation loads		
Sealing	: V'Ring	V'Ring	Max. traction	: 42 kgf	
Lubrication interval	: -	-	Max. compression	: 59 kgf	
Lubricant amount	: -	-			
Lubricant type	: Mobil Polyrex EM				
Notes					
<p>This revision replaces and cancel the previous one, which must be eliminated.</p> <p>(1) Looking the motor from the shaft end.</p> <p>(2) Measured at 1m and with tolerance of +3dB(A).</p> <p>(3) Approximate weight subject to changes after manufacturing process.</p> <p>(4) At 100% of full load.</p>			<p>These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.</p>		
Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by				Page	Revision
Date	13/05/2022			1 / 2	

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : NEMA Premium Efficiency Three-Phase      Product code : 12675409

LOAD PERFORMANCE CURVE

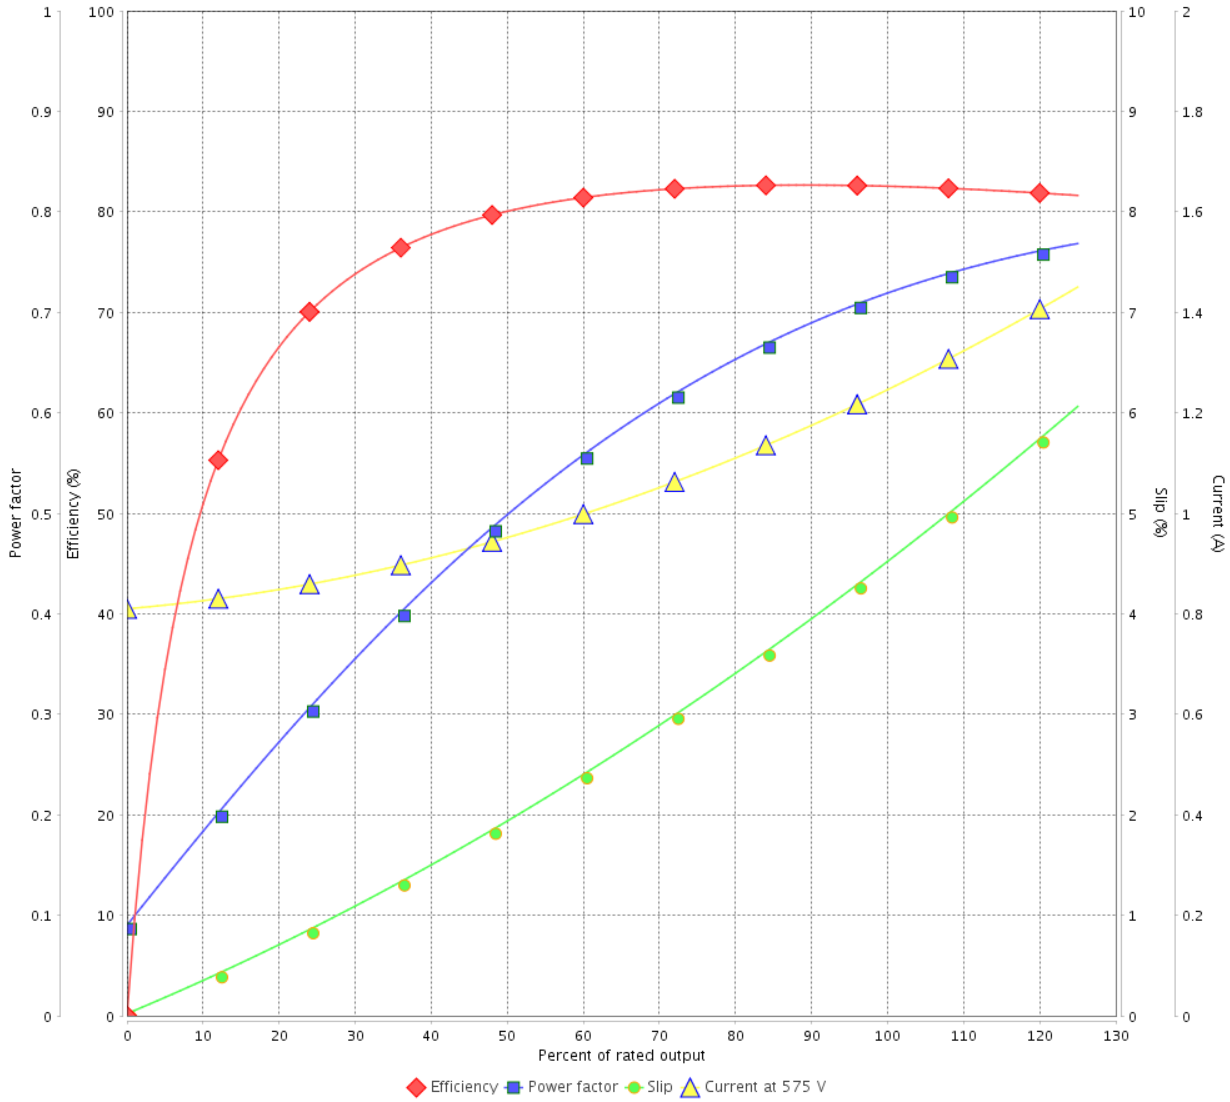

Performance : 575 V 60 Hz 6P

Rated current	: 1.26 A	Moment of inertia (J)	: 0.0067 kgm <sup>2</sup>
LRC	: 5.8	Duty cycle	: Cont.(S1)
Rated torque	: 0.634 kgfm	Insulation class	: F
Locked rotor torque	: 229 %	Service factor	: 1.15
Breakdown torque	: 280 %	Temperature rise	: 80 K
Rated speed	: 1145 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by			2 / 2	
Date	13/05/2022			