

# DATA SHEET



## Three Phase Induction Motor - Squirrel Cage

Customer					
Product line	: NEMA Premium Efficiency Three-Phase	Product code	: 12675412		
Frame	: 182/4T	Cooling method	: IC411 - TEFC		
Insulation class	: F	Mounting	: F-1		
Duty cycle	: Cont.(S1)	Rotation <sup>1</sup>	: Both (CW and CCW)		
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line		
Altitude	: 1000 m.a.s.l.	Approx. weight <sup>3</sup>	: 37.1 kg		
Protection degree	: IP55	Moment of inertia (J)	: 0.0144 kgm <sup>2</sup>		
Design	: B				
Output [HP]	2				
Poles	6				
Frequency [Hz]	60				
Rated voltage [V]	575				
Rated current [A]	2.40				
L. R. Amperes [A]	18.0				
LRC [A]	7.5x(Code K)				
No load current [A]	1.50				
Rated speed [RPM]	1170				
Slip [%]	2.50				
Rated torque [kgfm]	1.24				
Locked rotor torque [%]	260				
Breakdown torque [%]	370				
Service factor	1.15				
Temperature rise	80 K				
Locked rotor time	79s (cold) 44s (hot)				
Noise level <sup>2</sup>	52.0 dB(A)				
Efficiency (%)	25%	82.0			
	50%	84.0			
	75%	86.5			
	100%	88.5			
Power Factor	25%	0.28			
	50%	0.50			
	75%	0.62			
	100%	0.71			
Bearing type	: <u>Drive end</u> 6206 ZZ	<u>Non drive end</u> 6205 ZZ	Foundation loads		
Sealing	: V'Ring	Without Bearing Seal	Max. traction	: 77 kgf	
Lubrication interval	: -	-	Max. compression	: 114 kgf	
Lubricant amount	: -	-			
Lubricant type	: Mobil Polyrex EM				
Notes					
<p>This revision replaces and cancel the previous one, which must be eliminated.</p> <p>(1) Looking the motor from the shaft end.</p> <p>(2) Measured at 1m and with tolerance of +3dB(A).</p> <p>(3) Approximate weight subject to changes after manufacturing process.</p> <p>(4) At 100% of full load.</p>			<p>These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.</p>		
Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by				Page	Revision
Date	13/05/2022			1 / 2	

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : NEMA Premium Efficiency Three-Phase      Product code : 12675412

LOAD PERFORMANCE CURVE

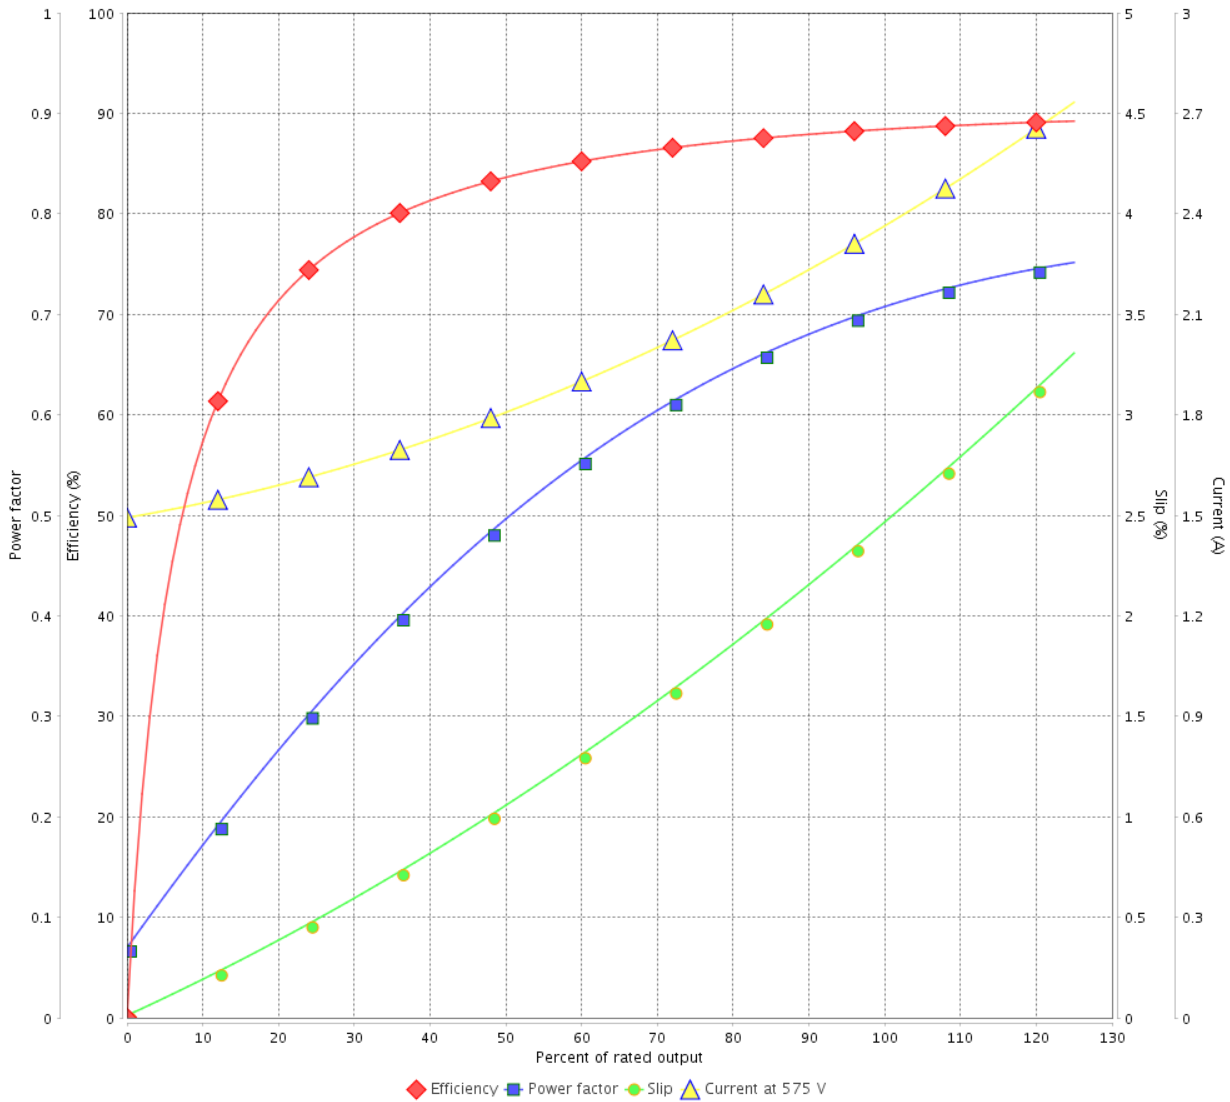

Performance : 575 V 60 Hz 6P

Rated current	: 2.40 A	Moment of inertia (J)	: 0.0144 kgm <sup>2</sup>
LRC	: 7.5	Duty cycle	: Cont.(S1)
Rated torque	: 1.24 kgfm	Insulation class	: F
Locked rotor torque	: 260 %	Service factor	: 1.15
Breakdown torque	: 370 %	Temperature rise	: 80 K
Rated speed	: 1170 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	13/05/2022			