

# DATA SHEET



## Three Phase Induction Motor - Squirrel Cage

Customer	:				
Product line	: NEMA Premium Efficiency Three-Phase	Product code :	12682571		
Frame	: 143/5T	Cooling method	: IC01 - ODP		
Insulation class	: F	Mounting	: F-1		
Duty cycle	: Cont.(S1)	Rotation <sup>1</sup>	: Both (CW and CCW)		
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line		
Altitude	: 1000 m.a.s.l.	Approx. weight <sup>3</sup>	: 13.5 kg		
Design	: B	Moment of inertia (J)	: 0.0035 kgm <sup>2</sup>		
Output [HP]	1.5				
Poles	2				
Frequency [Hz]	60				
Rated voltage [V]	575				
Rated current [A]	1.48				
L. R. Amperes [A]	12.7				
LRC [A]	8.6x(Code K)				
No load current [A]	0.647				
Rated speed [RPM]	3510				
Slip [%]	2.50				
Rated torque [kgfm]	0.310				
Locked rotor torque [%]	210				
Breakdown torque [%]	330				
Service factor	1.15				
Temperature rise	80 K				
Locked rotor time	34s (cold) 19s (hot)				
Noise level <sup>2</sup>	62.0 dB(A)				
Efficiency (%)	25%	81.1			
	50%	81.5			
	75%	84.0			
	100%	84.0			
Power Factor	25%	0.45			
	50%	0.73			
	75%	0.83			
	100%	0.89			
Bearing type	: Drive end	Non drive end	Foundation loads		
Sealing	: 6205 ZZ	6203 ZZ	Max. traction	: 22 kgf	
Lubrication interval	: Without	Without	Max. compression	: 36 kgf	
Lubricant amount	: Bearing Seal	Bearing Seal			
Lubricant type	: -	-			
Notes					
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by				Page	Revision
Date	13/05/2022			1 / 2	

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : NEMA Premium Efficiency Three-Phase      Product code : 12682571

LOAD PERFORMANCE CURVE

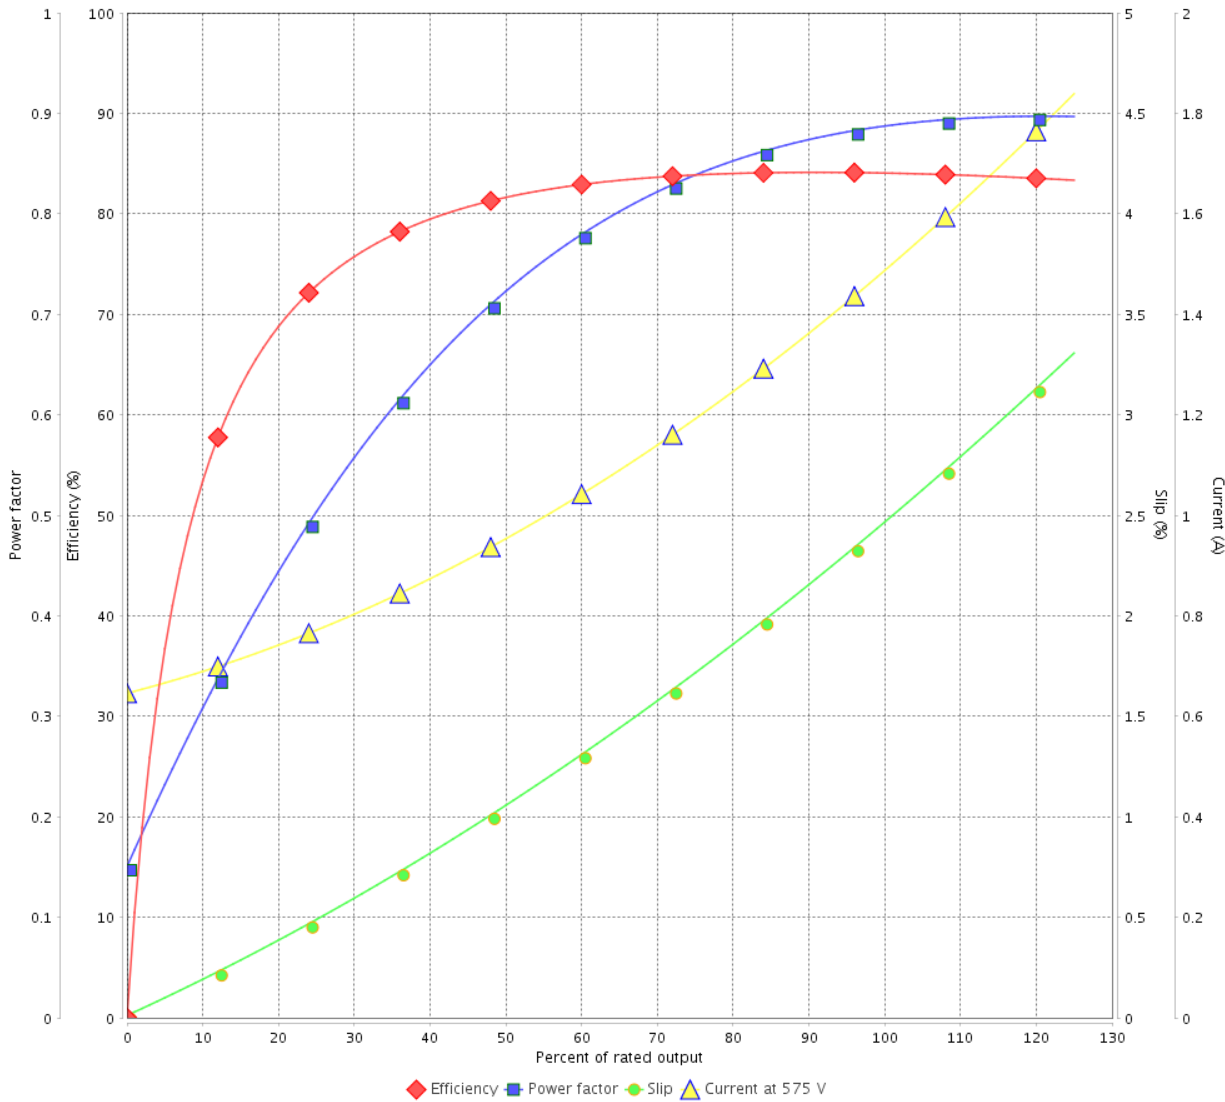

Performance : 575 V 60 Hz 2P

Rated current	: 1.48 A	Moment of inertia (J)	: 0.0035 kgm <sup>2</sup>
LRC	: 8.6	Duty cycle	: Cont.(S1)
Rated torque	: 0.310 kgfm	Insulation class	: F
Locked rotor torque	: 210 %	Service factor	: 1.15
Breakdown torque	: 330 %	Temperature rise	: 80 K
Rated speed	: 3510 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	13/05/2022			