

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Rolled Steel JP Pump NEMA Premium Efficiency Three-Phase Product code : 12682726

Frame	: 213/5JP	Locked rotor time	: 23s (cold) 13s (hot)
Output	: 7.5 HP (5.5 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 7.31 A	Cooling method	: IC01 - ODP
L. R. Amperes	: 53.4 A	Mounting	: F-1
LRC	: 7.3x(Code H)	Rotation ¹	: Both (CW and CCW)
No load current	: 3.51 A	Noise level ²	: 59.0 dB(A)
Rated speed	: 1770 rpm	Vibration	: A
Slip	: 1.67 %	Starting method	: Direct On Line
Rated torque	: 3 kgfm	Approx. weight ³	: 52.6 kg
Locked rotor torque	: 200 %	Painting plan	: 207N (ISO 12944 - C2)
Breakdown torque	: 300 %	Color	: Munsell N 1 - Matte
Insulation class	: F	Design	: B
Service factor	: 1.15		
Moment of inertia (J)	: 0.0433 kgm ²		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	89.5	90.2	91.0	Max. traction	: 142 kgf
Power Factor	0.65	0.78	0.83	Max. compression	: 199 kgf

	Drive end	Non drive end
Bearing type	: 6209 ZZ	: 6206 ZZ
Sealing	: Without Bearing Seal	: Without Bearing Seal
Lubrication interval	: -	: -
Lubricant amount	: -	: -
Lubricant type	: Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page Revision 1 / 2		
Checked by				
Date	29/09/2026			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Rolled Steel JP Pump NEMA
Premium Efficiency Three-Phase

Product code : 12682726

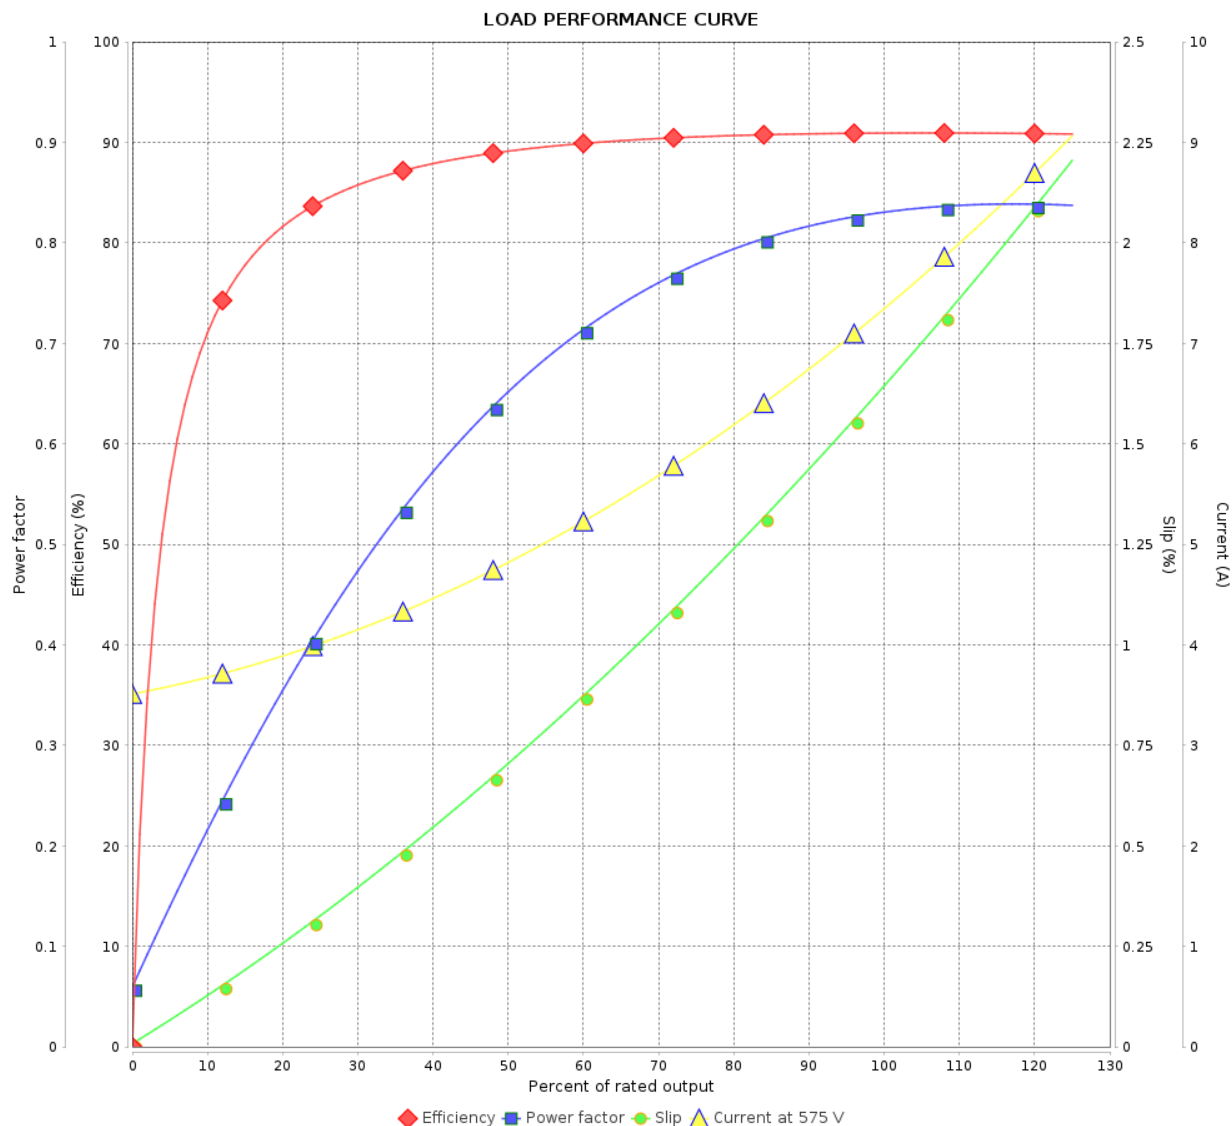

Performance : 575 V 60 Hz 4P

Rated current : 7.31 A
LRC : 7.3
Rated torque : 3 kgfm
Locked rotor torque : 200 %
Breakdown torque : 300 %
Rated speed : 1770 rpm

Moment of inertia (J) : 0.0433 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 2 / 2	Revision
Checked by					
Date	29/09/2026				