

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase Product code : 12709736

Frame	: 213/5TC	Cooling method	: IC411 - TEFC
Insulation class	: F	Mounting	: F-1
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line
Altitude	: 1000 m.a.s.l.	Approx. weight ²	: 77.9 kg
Protection degree	: IP56	Moment of inertia (J)	: 0.0268 kgm ²
Design	: B		

Output [HP]	10	7.5	7.5	7.5	10	10	10
Poles	2	2	2	2	2	2	2
Frequency [Hz]	60	50	50	50	50	50	50
Rated voltage [V]	460	380	400	415	380	400	415
Rated current [A]	11.7	10.6	10.4	10.0	14.3	13.7	13.4
L. R. Amperes [A]	84.5	83.8	90.8	91.2	80.1	87.9	92.5
LRC [A]	7.2x(Code H)	7.9x(Code J)	8.7x(Code K)	9.1x(Code K)	5.6x(Code F)	6.4x(Code G)	6.9x(Code H)
No load current [A]	3.60	3.50	3.70	3.90	3.50	3.70	3.90
Rated speed [RPM]	3520	2930	2940	2945	2885	2900	2910
Slip [%]	2.22	2.33	2.00	1.83	3.83	3.33	3.00
Rated torque [kgfm]	2.06	1.86	1.85	1.85	2.52	2.50	2.49
Locked rotor torque [%]	220	220	240	260	170	190	200
Breakdown torque [%]	290	300	340	360	220	250	270
Service factor	1.25	1.25	1.25	1.25	1.00	1.00	1.00
Temperature rise	80 K	80 K	80 K	80 K	105 K	105 K	105 K
Locked rotor time	32s (cold) 18s (hot)	32s (cold) 18s (hot)	32s (cold) 18s (hot)	32s (cold) 18s (hot)	21s (cold) 12s (hot)	21s (cold) 12s (hot)	21s (cold) 12s (hot)
Noise level ²	68.0 dB(A)	63.0 dB(A)	63.0 dB(A)	63.0 dB(A)	63.0 dB(A)	63.0 dB(A)	63.0 dB(A)
Efficiency (%)	25%	89.3	88.4	88.2	87.2	90.1	90.2
	50%	89.5	88.6	88.4	87.7	89.5	89.5
	75%	90.2	89.6	89.6	89.5	89.5	89.5
	100%	90.2	89.5	89.5	89.8	88.5	88.5
Power Factor	25%	0.54	0.51	0.48	0.45	0.60	0.57
	50%	0.79	0.75	0.72	0.70	0.83	0.81
	75%	0.86	0.85	0.83	0.81	0.89	0.87
	100%	0.89	0.88	0.85	0.85	0.90	0.89

Losses at normative operating points (speed;torque), in percentage of rated output power

Losses (%)	P1 (0,9;1,0)	10.5	11.4	11.4	11.0	12.6	12.6	12.6
	P2 (0,5;1,0)	8.5	9.2	9.2	8.9	10.1	10.1	10.1
	P3 (0,25;1,0)	7.4	8.0	8.0	7.8	8.9	8.9	8.9
	P4 (0,9;0,5)	5.1	5.6	5.6	5.4	6.2	6.2	6.2
	P5 (0,5;0,5)	3.2	3.4	3.4	3.3	3.8	3.8	3.8
	P6 (0,5;0,25)	2.0	2.2	2.2	2.1	2.4	2.4	2.4
	P7 (0,25;0,25)	1.2	1.3	1.3	1.3	1.5	1.5	1.5

Bearing type	: 6308 C3	Non drive end	6207 C3	Foundation loads	Max. traction	: 85 kgf
	: Inpro/Seal	Inpro/Seal	Max. compression		: 163 kgf	
	: 20000 h	20000 h				
	: 11 g	7 g				
	: Mobil Polyrex EM					

This revision replaces and cancel the previous one, which must be eliminated.

(1) Looking the motor from the shaft end.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary			Performed	Checked	Date
Performed by						
Checked by					Page	Revision
Date	22/10/2023				1 / 9	

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Notes

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	22/10/2023		2 / 9	


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase Product code : 12709736

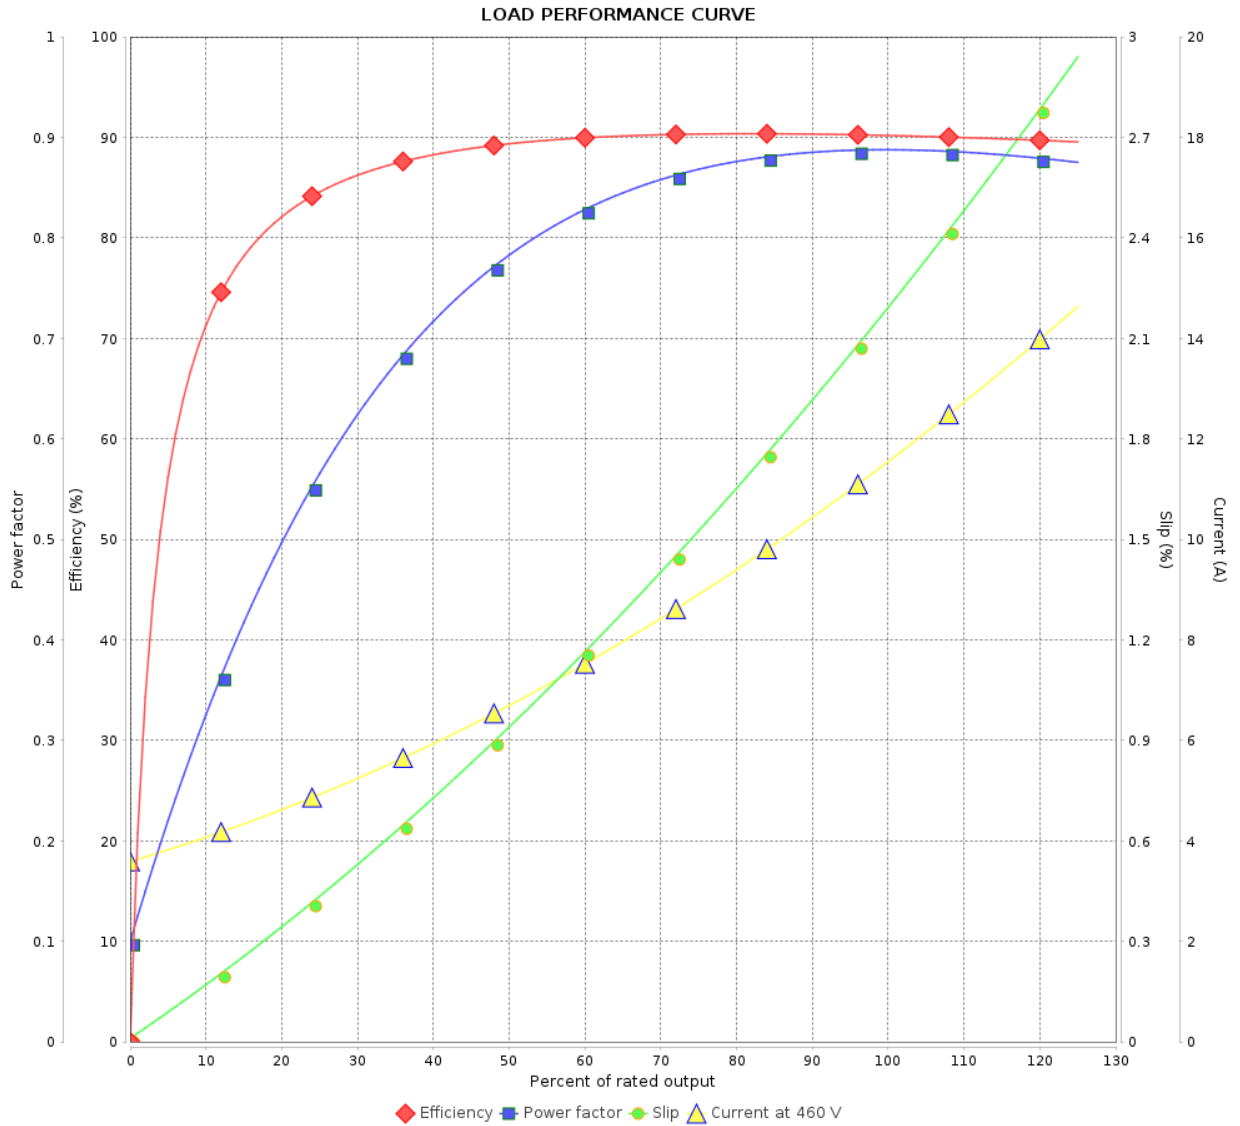

Performance : 460 V 60 Hz 2P

Rated current	: 11.7 A	Moment of inertia (J)	: 0.0268 kgm ²
LRC	: 7.2	Duty cycle	: Cont.(S1)
Rated torque	: 2.06 kgfm	Insulation class	: F
Locked rotor torque	: 220 %	Service factor	: 1.25
Breakdown torque	: 290 %	Temperature rise	: 80 K
Rated speed	: 3520 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 3 / 9	Revision
Checked by				
Date	22/10/2023			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase Product code : 12709736

LOAD PERFORMANCE CURVE

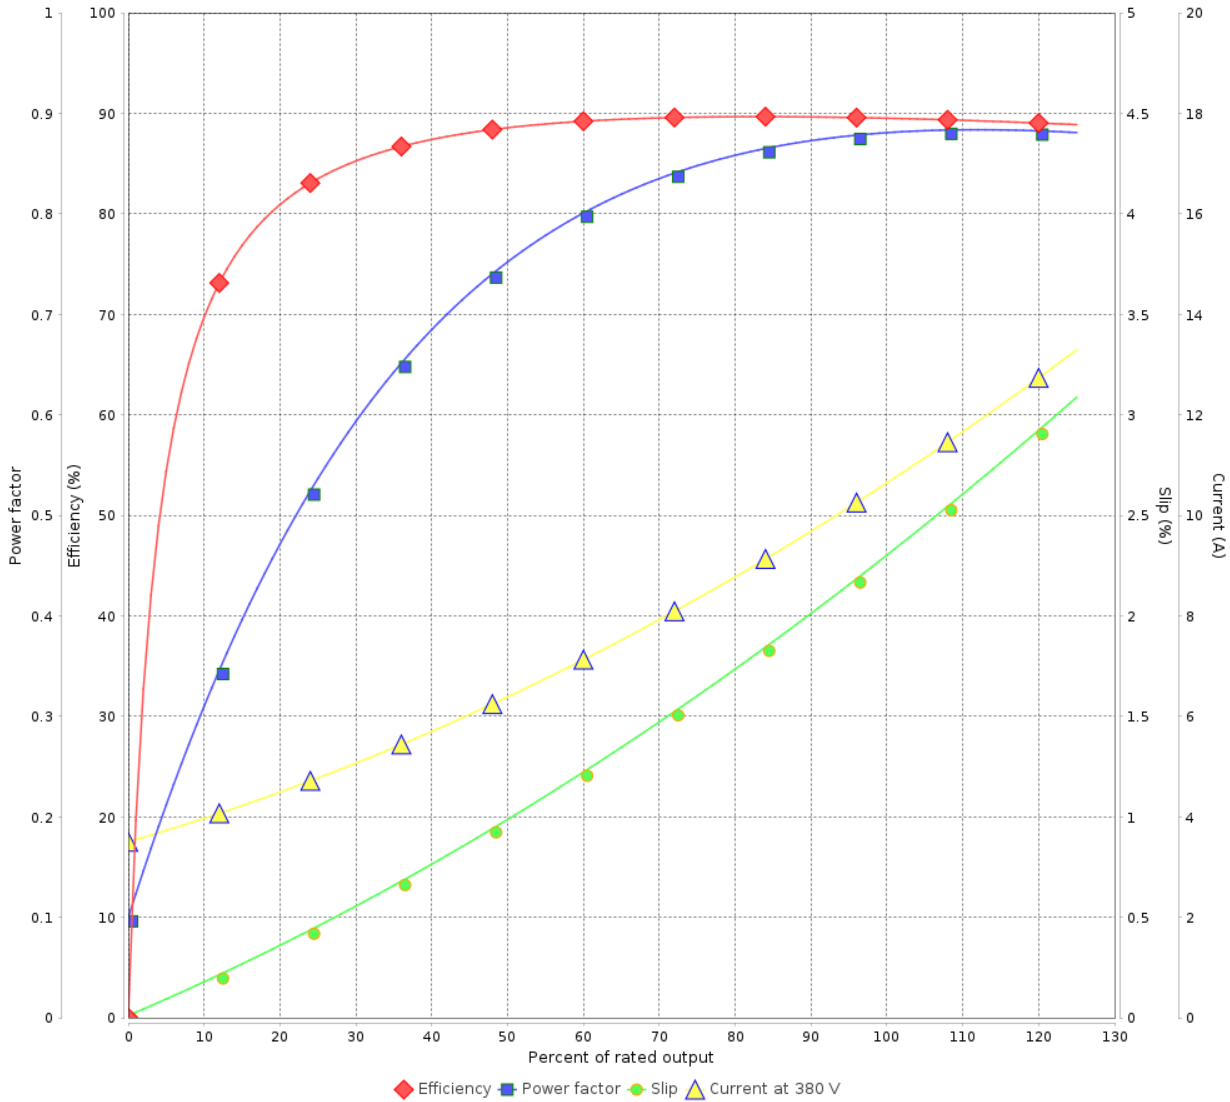

Performance : 380 V 50 Hz 2P IE3

Rated current	: 10.6 A	Moment of inertia (J)	: 0.0268 kgm ²
LRC	: 7.9	Duty cycle	: Cont.(S1)
Rated torque	: 1.86 kgfm	Insulation class	: F
Locked rotor torque	: 220 %	Service factor	: 1.25
Breakdown torque	: 300 %	Temperature rise	: 80 K
Rated speed	: 2930 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by			4 / 9	
Date	22/10/2023			


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase Product code : 12709736

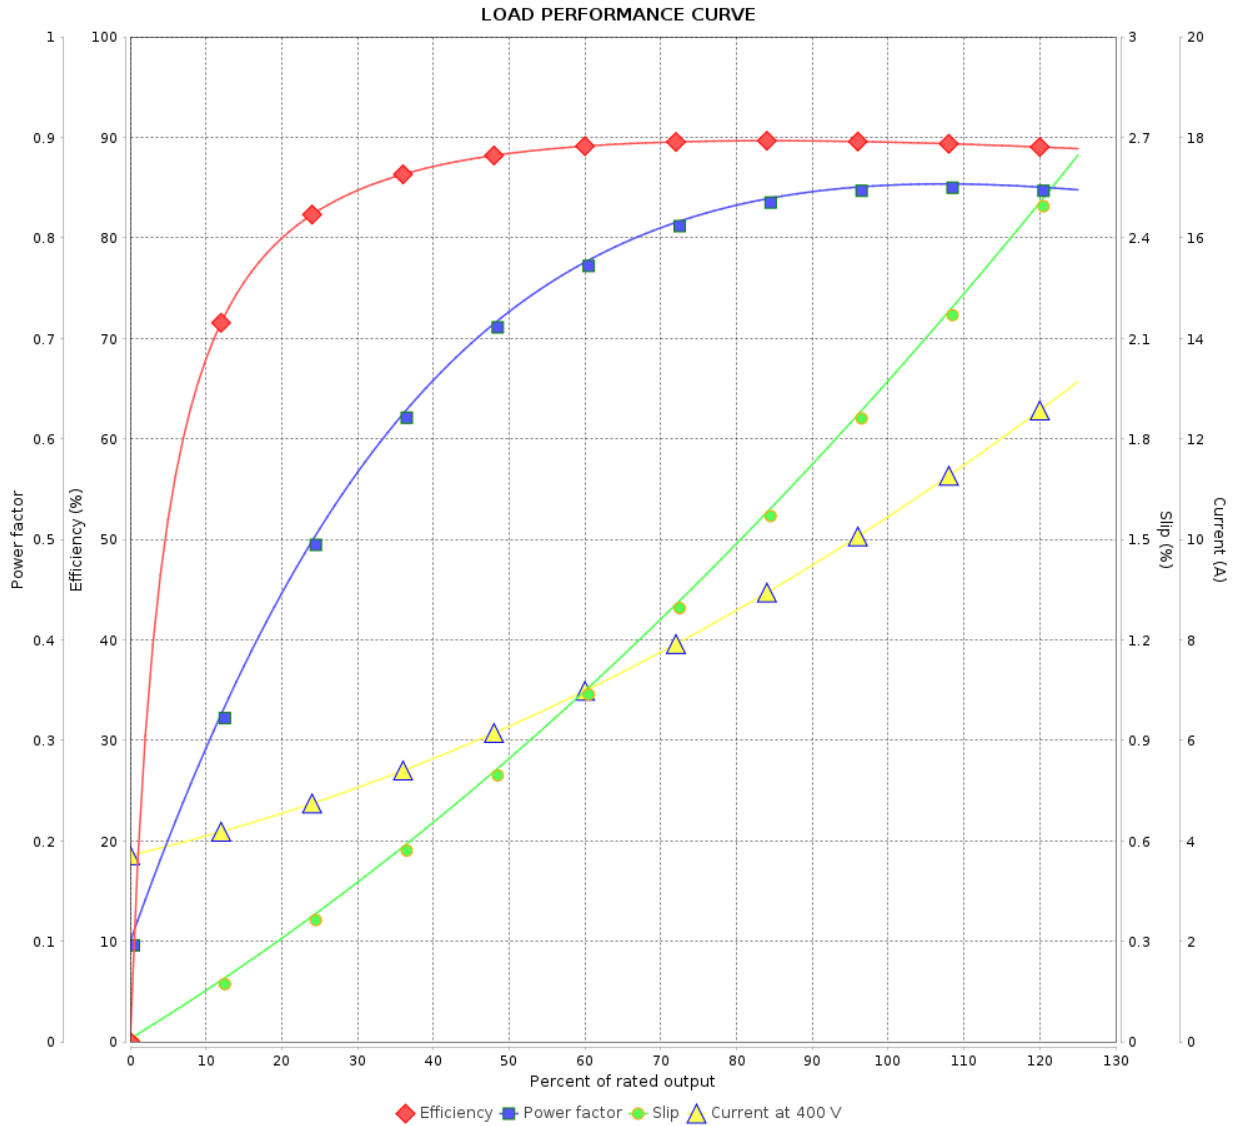

Performance : 400 V 50 Hz 2P IE3

Rated current : 10.4 A
 LRC : 8.7
 Rated torque : 1.85 kgfm
 Locked rotor torque : 240 %
 Breakdown torque : 340 %
 Rated speed : 2940 rpm

Moment of inertia (J) : 0.0268 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.25
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase Product code : 12709736

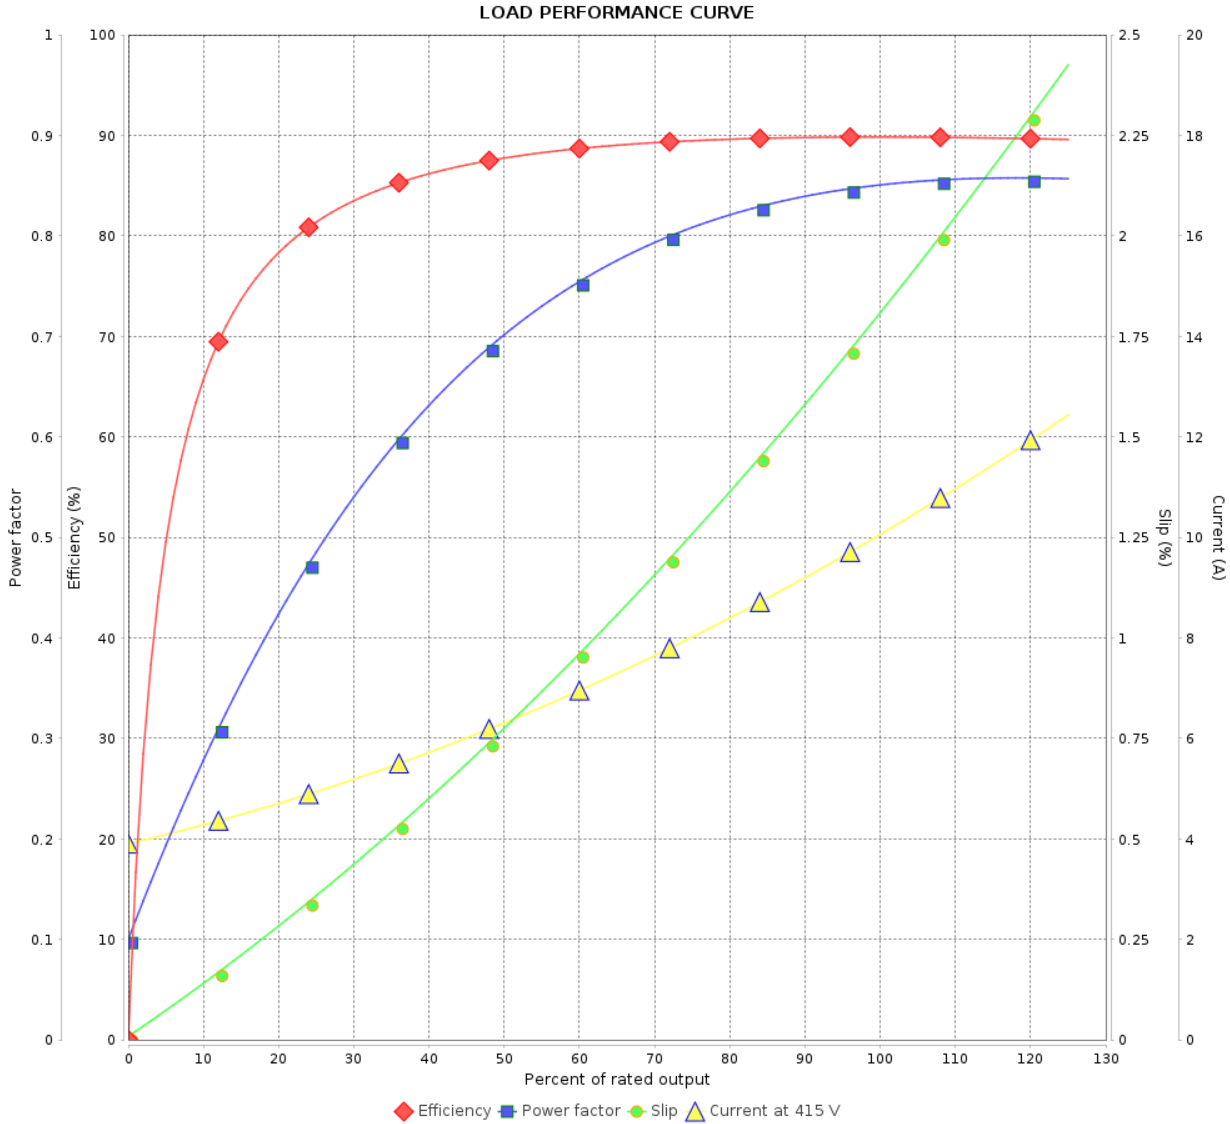

Performance : 415 V 50 Hz 2P IE3

Rated current	: 10.0 A	Moment of inertia (J)	: 0.0268 kgm ²
LRC	: 9.1	Duty cycle	: Cont.(S1)
Rated torque	: 1.85 kgfm	Insulation class	: F
Locked rotor torque	: 260 %	Service factor	: 1.25
Breakdown torque	: 360 %	Temperature rise	: 80 K
Rated speed	: 2945 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 6 / 9	Revision
Checked by				
Date	22/10/2023			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 IEEE 841 NEMA Premium Efficiency
Three-Phase

Product code : 12709736

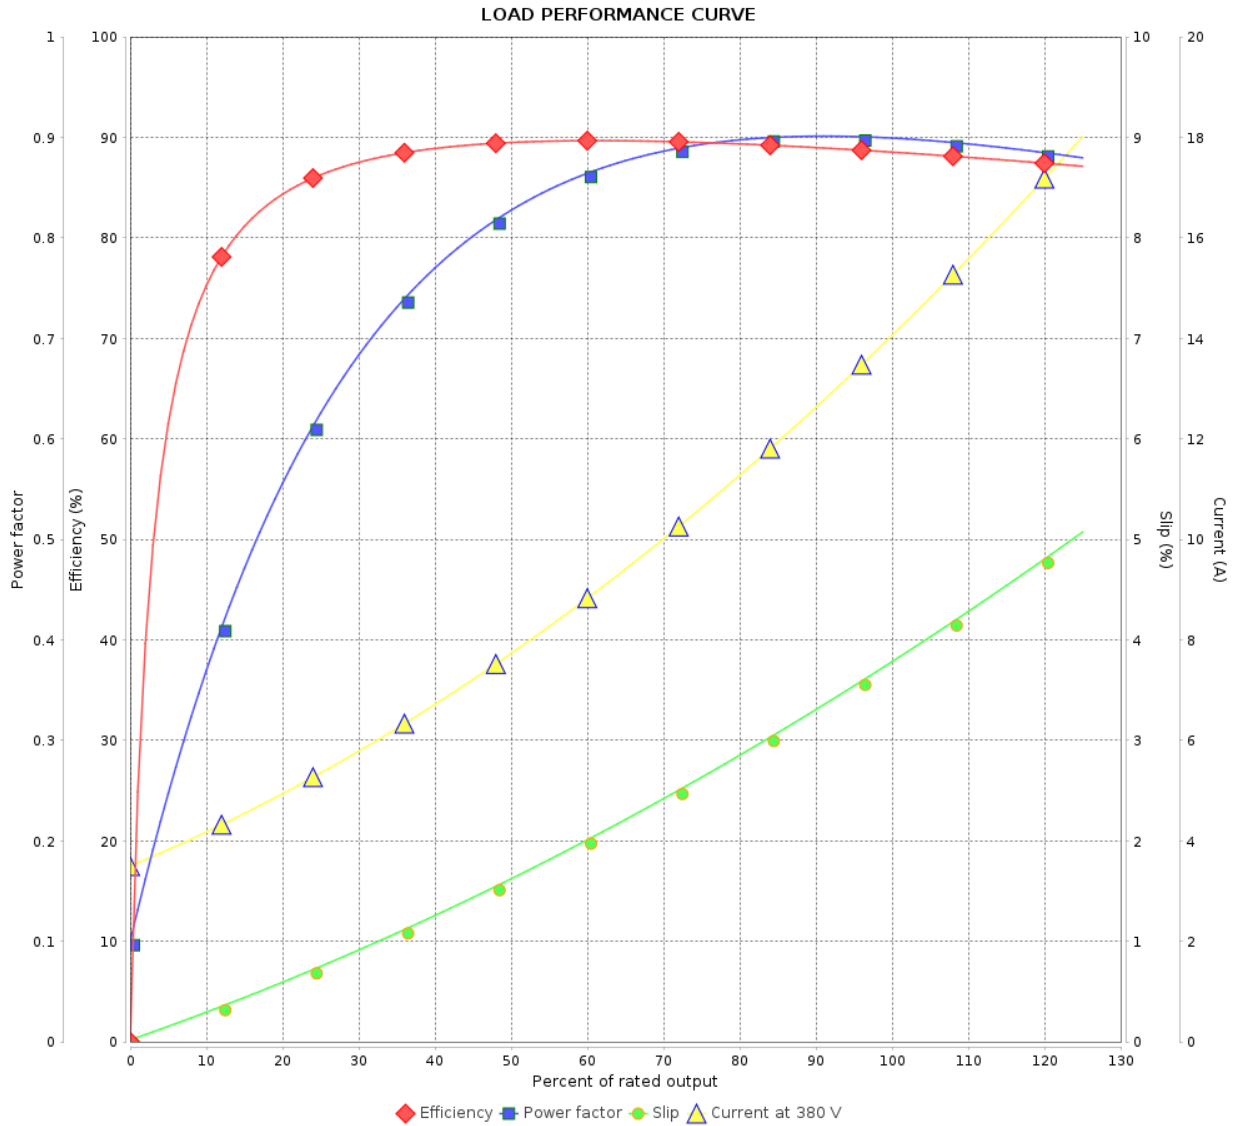

Performance : 380 V 50 Hz 2P IE2

Rated current : 14.3 A
 LRC : 5.6
 Rated torque : 2.52 kgfm
 Locked rotor torque : 170 %
 Breakdown torque : 220 %
 Rated speed : 2885 rpm

Moment of inertia (J) : 0.0268 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 105 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase Product code : 12709736

LOAD PERFORMANCE CURVE

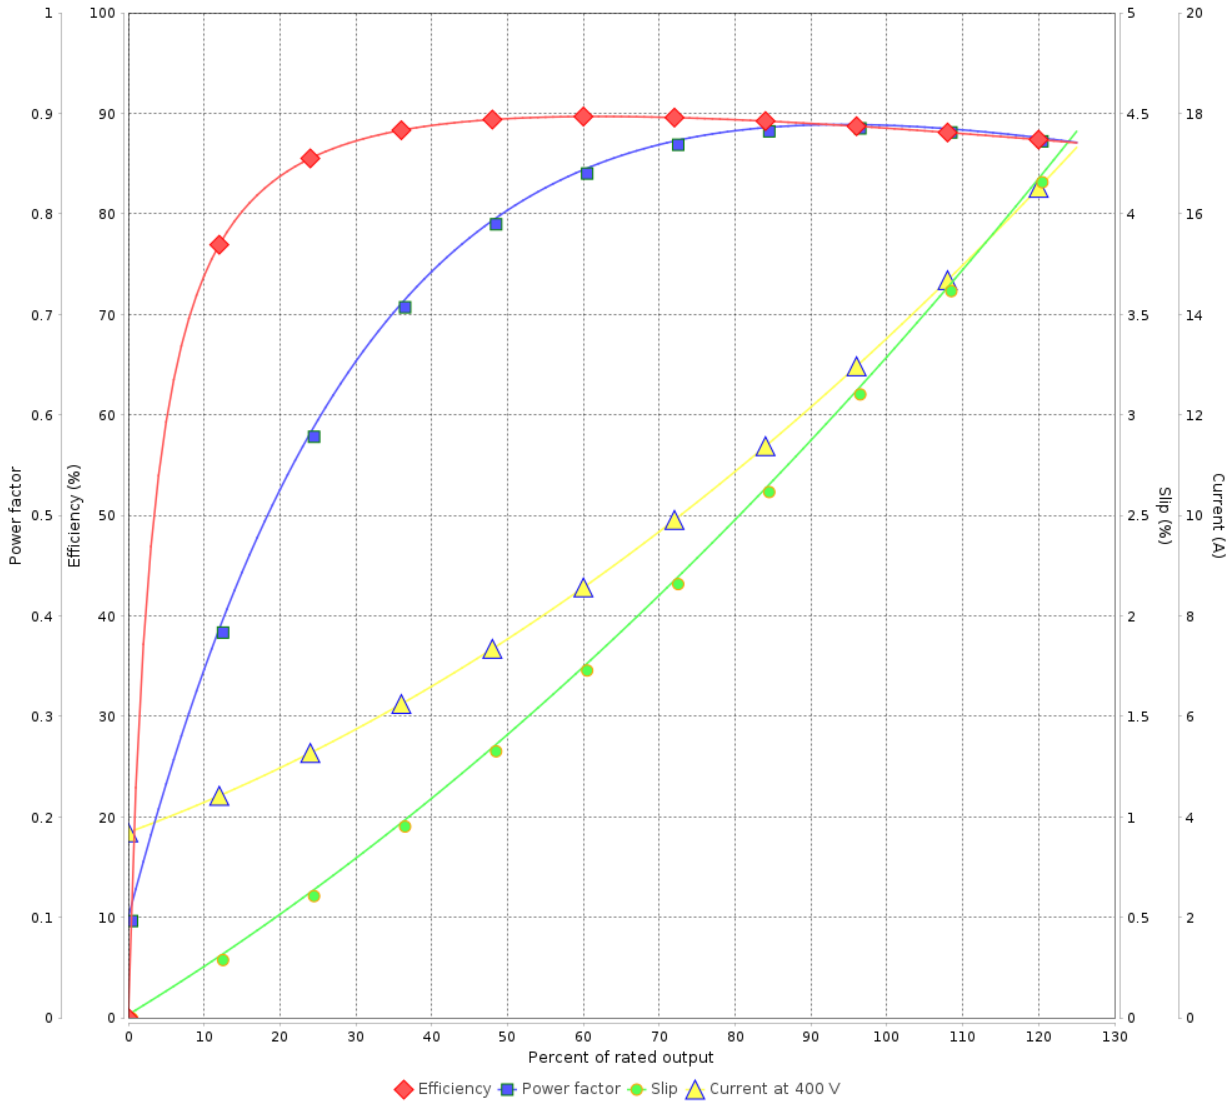

Performance : 400 V 50 Hz 2P IE2

Rated current	: 13.7 A	Moment of inertia (J)	: 0.0268 kgm ²
LRC	: 6.4	Duty cycle	: Cont.(S1)
Rated torque	: 2.50 kgfm	Insulation class	: F
Locked rotor torque	: 190 %	Service factor	: 1.00
Breakdown torque	: 250 %	Temperature rise	: 105 K
Rated speed	: 2900 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 8 / 9	Revision
Checked by				
Date	22/10/2023			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 IEEE 841 NEMA Premium Efficiency
Three-Phase

Product code : 12709736

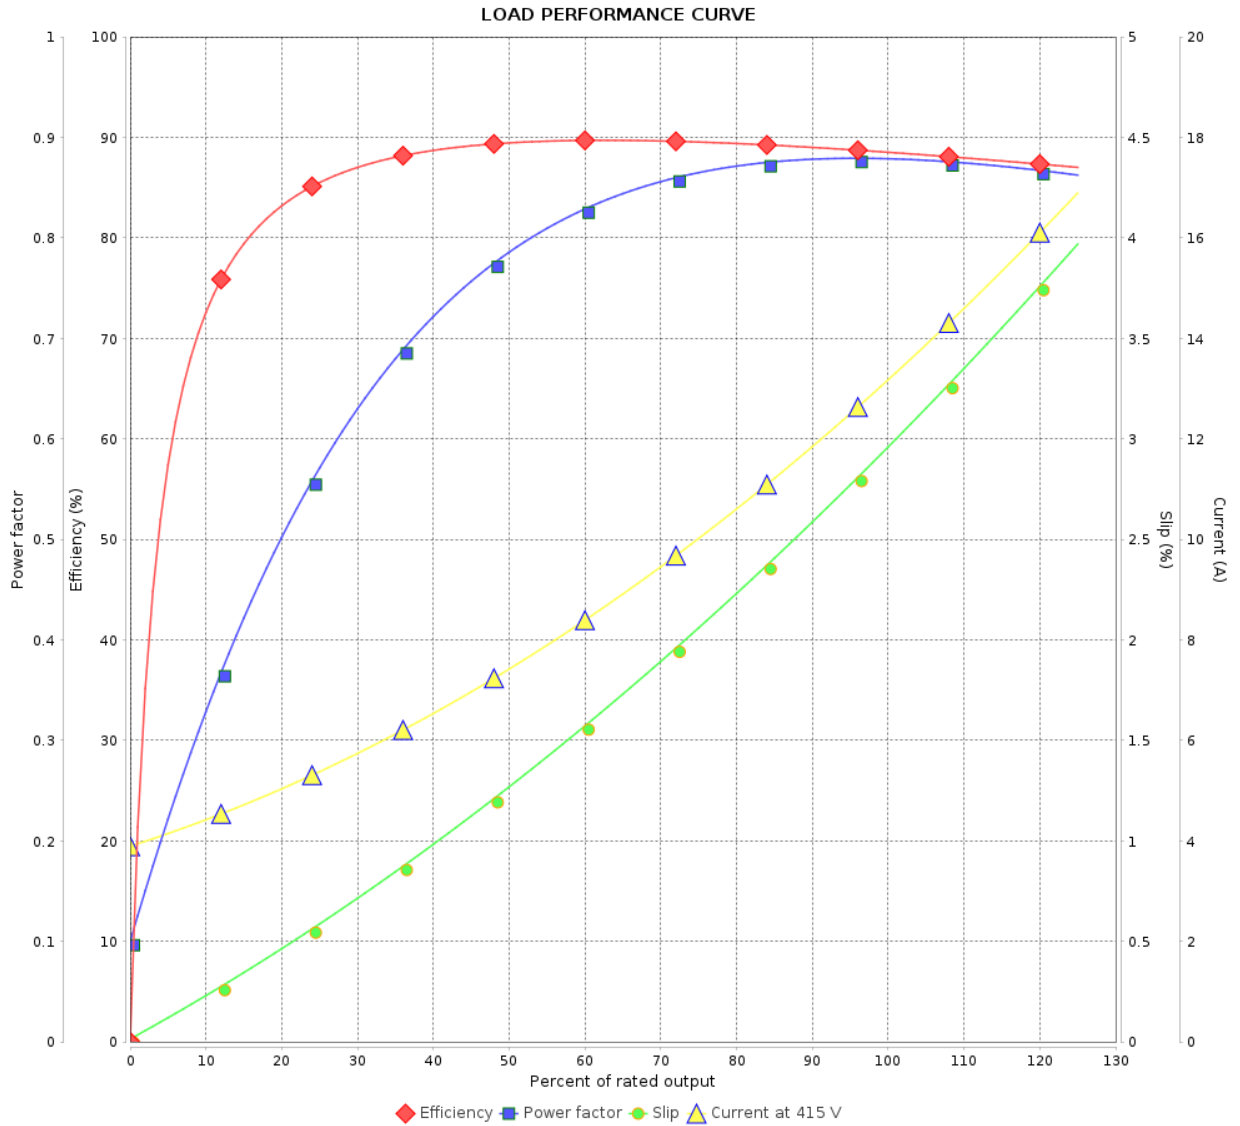

Performance : 415 V 50 Hz 2P IE2

Rated current : 13.4 A
 LRC : 6.9
 Rated torque : 2.49 kgfm
 Locked rotor torque : 200 %
 Breakdown torque : 270 %
 Rated speed : 2910 rpm

Moment of inertia (J) : 0.0268 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 105 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		9 / 9		
Date		22/10/2023		