

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W22 Close Coupled Pump JP Product code : 12712151
 NEMA Premium Efficiency Three-Phase

| | | | |
|-----------------------|---------------------------|-----------------------------|------------------------|
| Frame | : 284/6JP | Locked rotor time | : 30s (cold) 17s (hot) |
| Output | : 25 HP (18.5 kW) | Temperature rise | : 80 K |
| Poles | : 2 | Duty cycle | : Cont.(S1) |
| Frequency | : 60 Hz | Ambient temperature | : -20°C to +40°C |
| Rated voltage | : 575 V | Altitude | : 1000 m.a.s.l. |
| Rated current | : 23.0 A | Protection degree | : IP55 |
| L. R. Amperes | : 145 A | Cooling method | : IC411 - TEFC |
| LRC | : 6.3x(Code G) | Mounting | : F-1 |
| No load current | : 5.82 A | Rotation ¹ | : Both (CW and CCW) |
| Rated speed | : 3545 rpm | Noise level ² | : 72.0 dB(A) |
| Slip | : 1.53 % | Starting method | : Direct On Line |
| Rated torque | : 5.11 kgfm | Approx. weight ³ | : 177 kg |
| Locked rotor torque | : 200 % | | |
| Breakdown torque | : 229 % | | |
| Insulation class | : F | | |
| Service factor | : 1.25 | | |
| Moment of inertia (J) | : 0.1135 kgm ² | | |
| Design | : B | | |

| | | | | | |
|----------------|------|------|------|------------------|-----------|
| Output | 50% | 75% | 100% | Foundation loads | |
| Efficiency (%) | 91.0 | 91.7 | 91.7 | Max. traction | : 80 kgf |
| Power Factor | 0.78 | 0.85 | 0.88 | Max. compression | : 256 kgf |

Losses at normative operating points (speed;torque), in percentage of rated output power

| P1 (0,9;1,0) | P2 (0,5;1,0) | P3 (0,25;1,0) | P4 (0,9;0,5) | P5 (0,5;0,5) | P6 (0,5;0,25) | P7 (0,25;0,25) |
|--------------|--------------|---------------|--------------|--------------|---------------|----------------|
| 8.6 | 6.5 | 5.6 | 4.4 | 2.5 | 1.6 | 0.9 |

| | Drive end | Non drive end |
|----------------------|--------------------|---------------|
| Bearing type | : 6311 C3 | : 6211 C3 |
| Sealing | : V'Ring | : V'Ring |
| Lubrication interval | : 14000 h | : 17000 h |
| Lubricant amount | : 18 g | : 11 g |
| Lubricant type | : Mobil Polyrex EM | |

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

| Rev. | Changes Summary | Performed | Checked | Date |
|--------------|-----------------|-----------|---------|----------|
| | | | | |
| Performed by | | | Page | Revision |
| Checked by | | | 1 / 2 | |
| Date | 24/10/2024 | | | |


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Close Coupled Pump JP
 NEMA Premium Efficiency Three-Phase
 Product code : 12712151

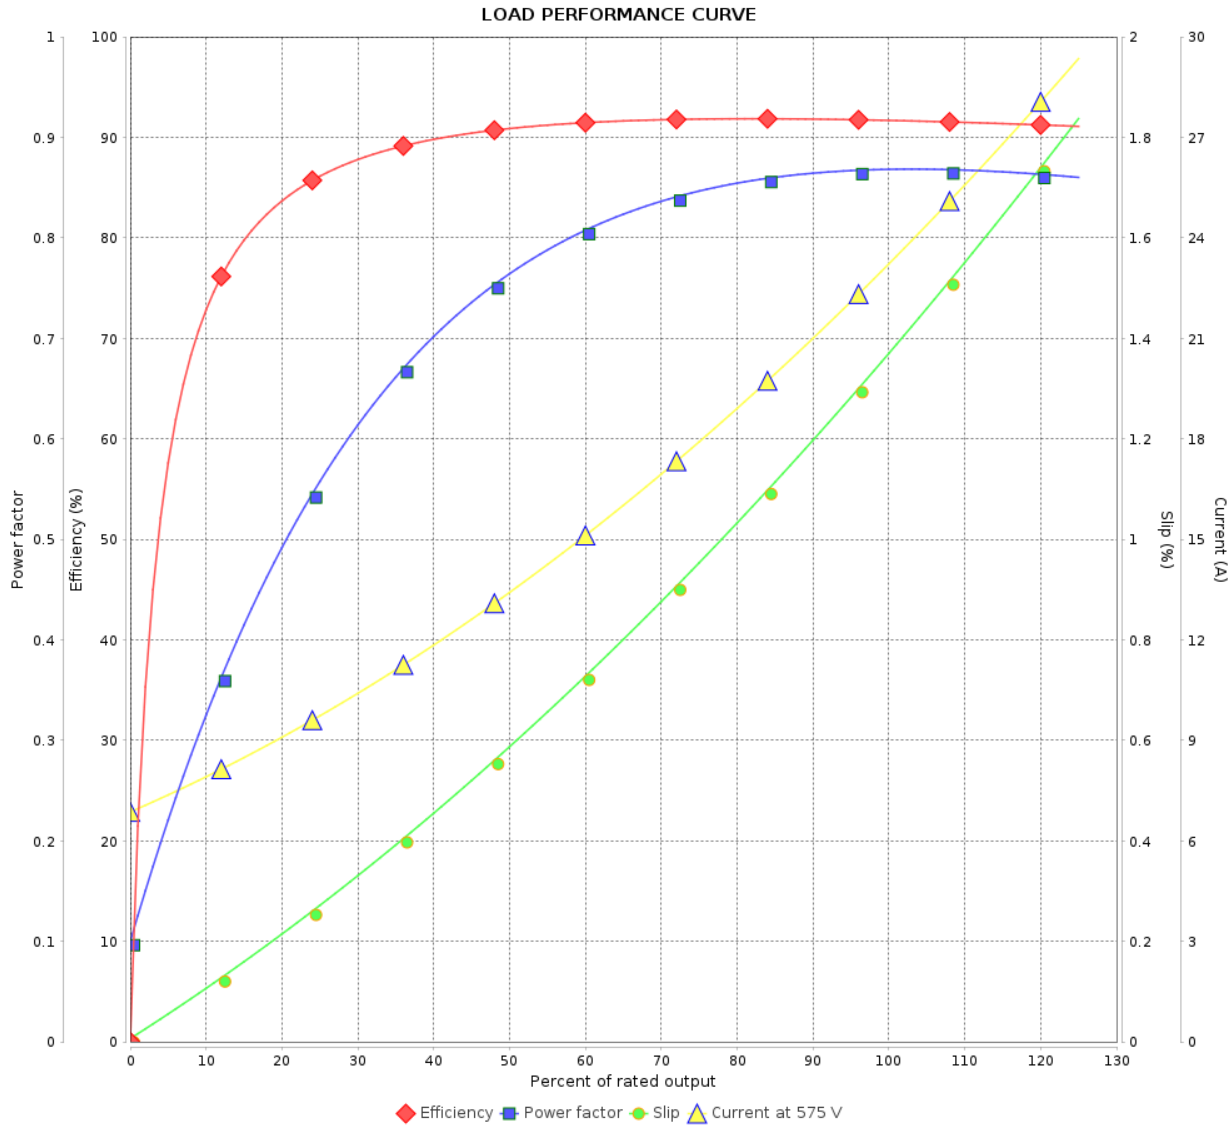

Performance : 575 V 60 Hz 2P

| | | | |
|---------------------|-------------|-----------------------|---------------------------|
| Rated current | : 23.0 A | Moment of inertia (J) | : 0.1135 kgm ² |
| LRC | : 6.3 | Duty cycle | : Cont.(S1) |
| Rated torque | : 5.11 kgfm | Insulation class | : F |
| Locked rotor torque | : 200 % | Service factor | : 1.25 |
| Breakdown torque | : 229 % | Temperature rise | : 80 K |
| Rated speed | : 3545 rpm | Design | : B |

| Rev. | Changes Summary | Performed | Checked | Date |
|--------------|-----------------|-----------|---------------|----------|
| | | | | |
| Performed by | | | Page 2 / 2 | Revision |
| Checked by | | | | |
| Date | 24/10/2024 | | | |