

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer					
Product line	: NEMA Premium Efficiency Three-Phase	Product code :	12727368		
Frame	: 254/6TC	Cooling method	: IC01 - ODP		
Insulation class	: F	Mounting	: F-1		
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)		
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line		
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 92.0 kg		
Design	: B	Moment of inertia (J)	: 0.0767 kgm ²		
Output [HP]	15				
Poles	4				
Frequency [Hz]	60				
Rated voltage [V]	575				
Rated current [A]	14.9				
L. R. Amperes [A]	100				
LRC [A]	6.7x(Code H)				
No load current [A]	7.60				
Rated speed [RPM]	1775				
Slip [%]	1.39				
Rated torque [kgfm]	6.13				
Locked rotor torque [%]	240				
Breakdown torque [%]	300				
Service factor	1.15				
Temperature rise	80 K				
Locked rotor time	30s (cold) 17s (hot)				
Noise level ²	64.0 dB(A)				
Efficiency (%)	25%	91.0			
	50%	91.7			
	75%	92.4			
	100%	93.0			
Power Factor	25%	0.36			
	50%	0.62			
	75%	0.73			
	100%	0.80			
Bearing type	: Drive end : 6309 Z C3	Non drive end : 6208 Z C3	Foundation loads		
Sealing	: Without	Without	Max. traction	: 243 kgf	
	Bearing Seal	Bearing Seal	Max. compression	: 335 kgf	
Lubrication interval	: 20000 h	20000 h			
Lubricant amount	: 13 g	8 g			
Lubricant type	: Mobil Polyrex EM				
Notes					
<p>This revision replaces and cancel the previous one, which must be eliminated.</p> <p>(1) Looking the motor from the shaft end.</p> <p>(2) Measured at 1m and with tolerance of +3dB(A).</p> <p>(3) Approximate weight subject to changes after manufacturing process.</p> <p>(4) At 100% of full load.</p>			<p>These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.</p>		
Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by				Page	Revision
Date	13/05/2022			1 / 2	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : NEMA Premium Efficiency Three-Phase Product code : 12727368

LOAD PERFORMANCE CURVE

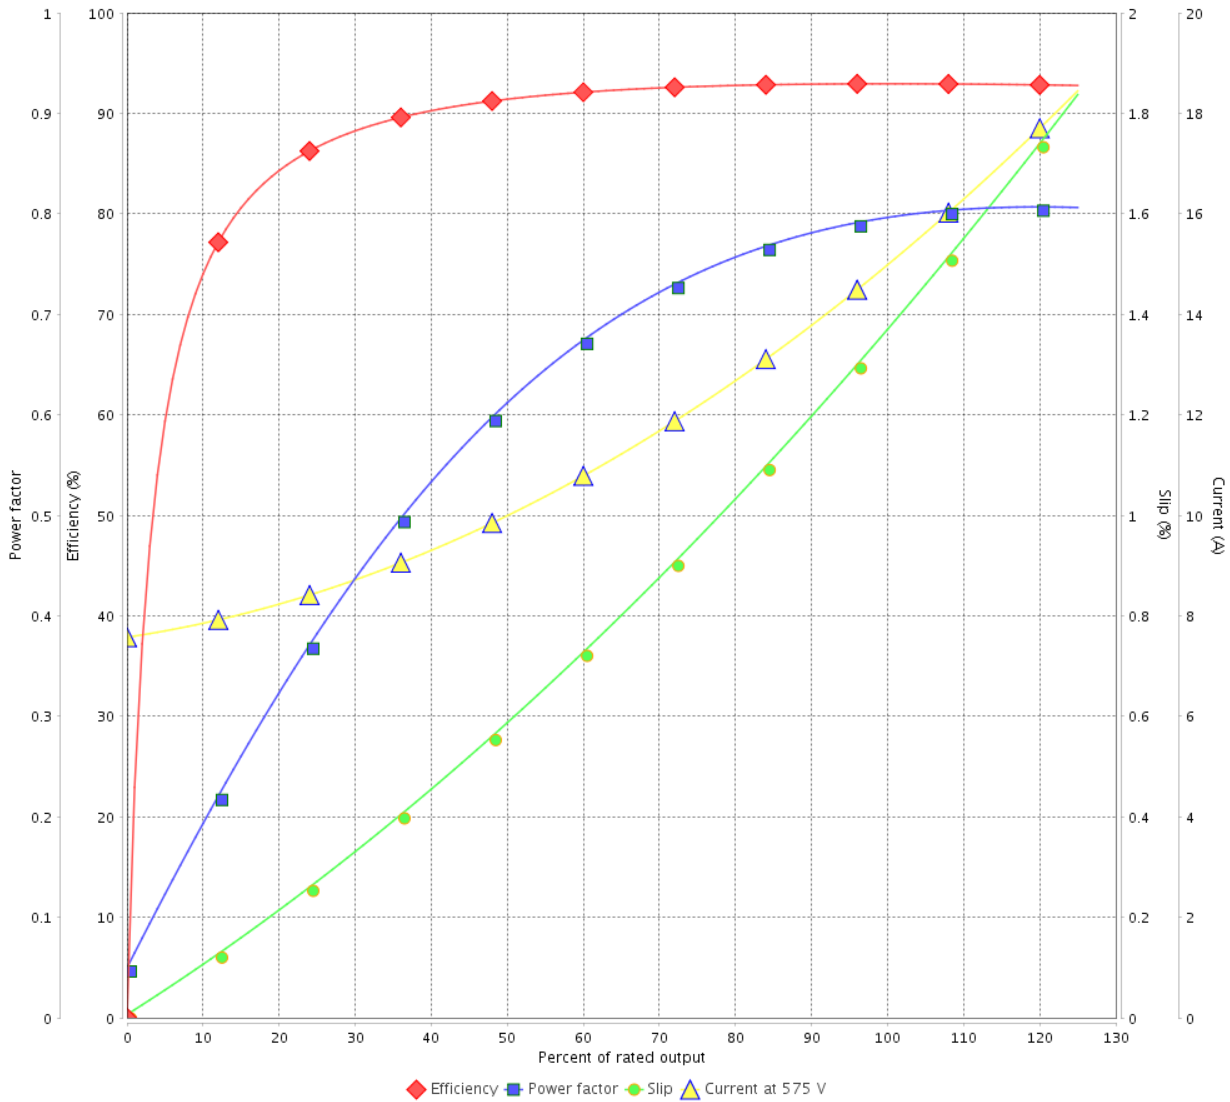

Performance : 575 V 60 Hz 4P

Rated current	: 14.9 A	Moment of inertia (J)	: 0.0767 kgm ²
LRC	: 6.7	Duty cycle	: Cont.(S1)
Rated torque	: 6.13 kgfm	Insulation class	: F
Locked rotor torque	: 240 %	Service factor	: 1.15
Breakdown torque	: 300 %	Temperature rise	: 80 K
Rated speed	: 1775 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by			2 / 2	
Date	13/05/2022			