

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :		
Product line	: Standard Efficiency Three-Phase	
Product code	: 12895578	
Frame	: 56C	
Insulation class	: F	
Duty cycle	: Cont.(S1)	
Ambient temperature	: -20°C to +40°C	
Altitude	: 1000 m.a.s.l.	
Protection degree	: IP55	
Cooling method	: IC411 - TEFC	
Mounting	: F-1	
Rotation ¹	: Both (CW and CCW)	
Starting method	: Direct On Line	
Approx. weight ²	: 9.9 kg	
Moment of inertia (J)	: 0.0025 kgm ²	
Output [HP]	0.5	
Poles	4	
Frequency [Hz]	60	
Rated voltage [V]	208-230/460	
Rated current [A]	1.91-1.72/0.862	
L. R. Amperes [A]	13.3-12.1/6.03	
LRC [A]	7.0x(Code L)	
No load current [A]	1.03-1.20/0.600	
Rated speed [RPM]	1760	
Slip [%]	2.22	
Rated torque [kgfm]	0.206	
Locked rotor torque [%]	240	
Breakdown torque [%]	300	
Service factor		
Temperature rise	80 K	
Locked rotor time	36s (cold) 20s (hot)	
Noise level ²	52.0 dB(A)	
Efficiency (%)	25%	65.4
	50%	68.0
	75%	74.0
	100%	77.0
Power Factor	25%	0.28
	50%	0.48
	75%	0.61
	100%	0.70
Bearing type	: <u>Drive end</u> 6203 ZZ <u>Non drive end</u> 6202 ZZ	
Sealing	: V'Ring Without Bearing Seal	
Lubrication interval	: - -	
Lubricant amount	: - -	
Lubricant type	: Mobil Polyrex EM	
Foundation loads	Max. traction : 18 kgf Max. compression : 28 kgf	
Notes USABLE @208V SF 1.00		
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.		
These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary	
Performed by	Performed	
Checked by	Checked	
Date	13/05/2022	
Page	1 / 4	
Revision		


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Standard Efficiency Three-Phase Product code : 12895578

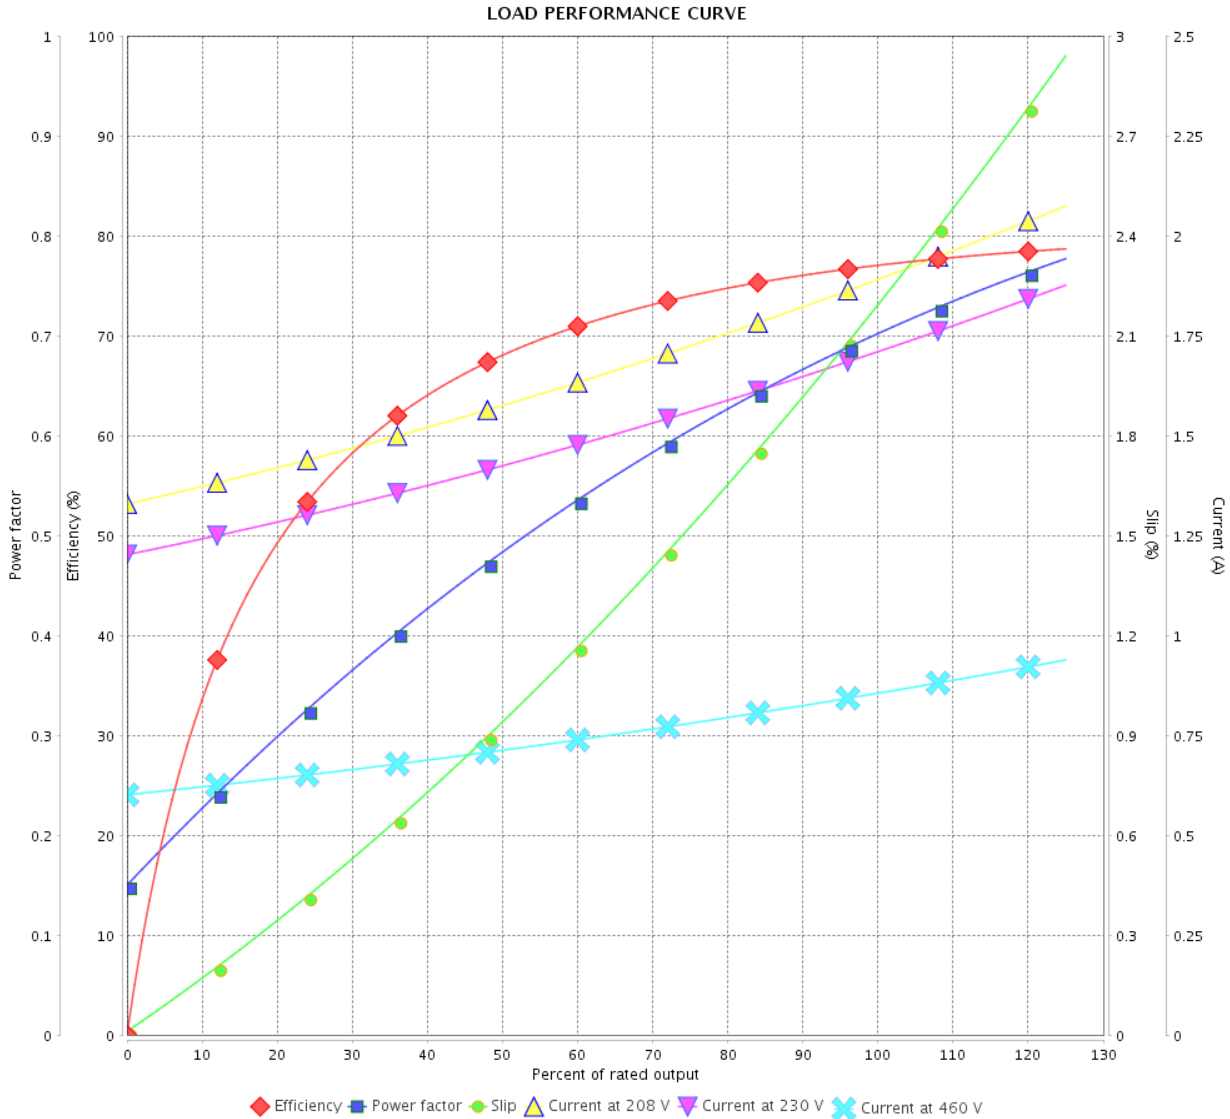

Performance : 208-230/460 V 60 Hz 4P

Rated current : 1.91-1.72/0.862 A
 LRC : 7.0
 Rated torque : 0.206 kgfm
 Locked rotor torque : 240 %
 Breakdown torque : 300 %
 Rated speed : 1760 rpm

Moment of inertia (J) : 0.0025 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor :
 Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : Standard Efficiency Three-Phase Product code : 12895578

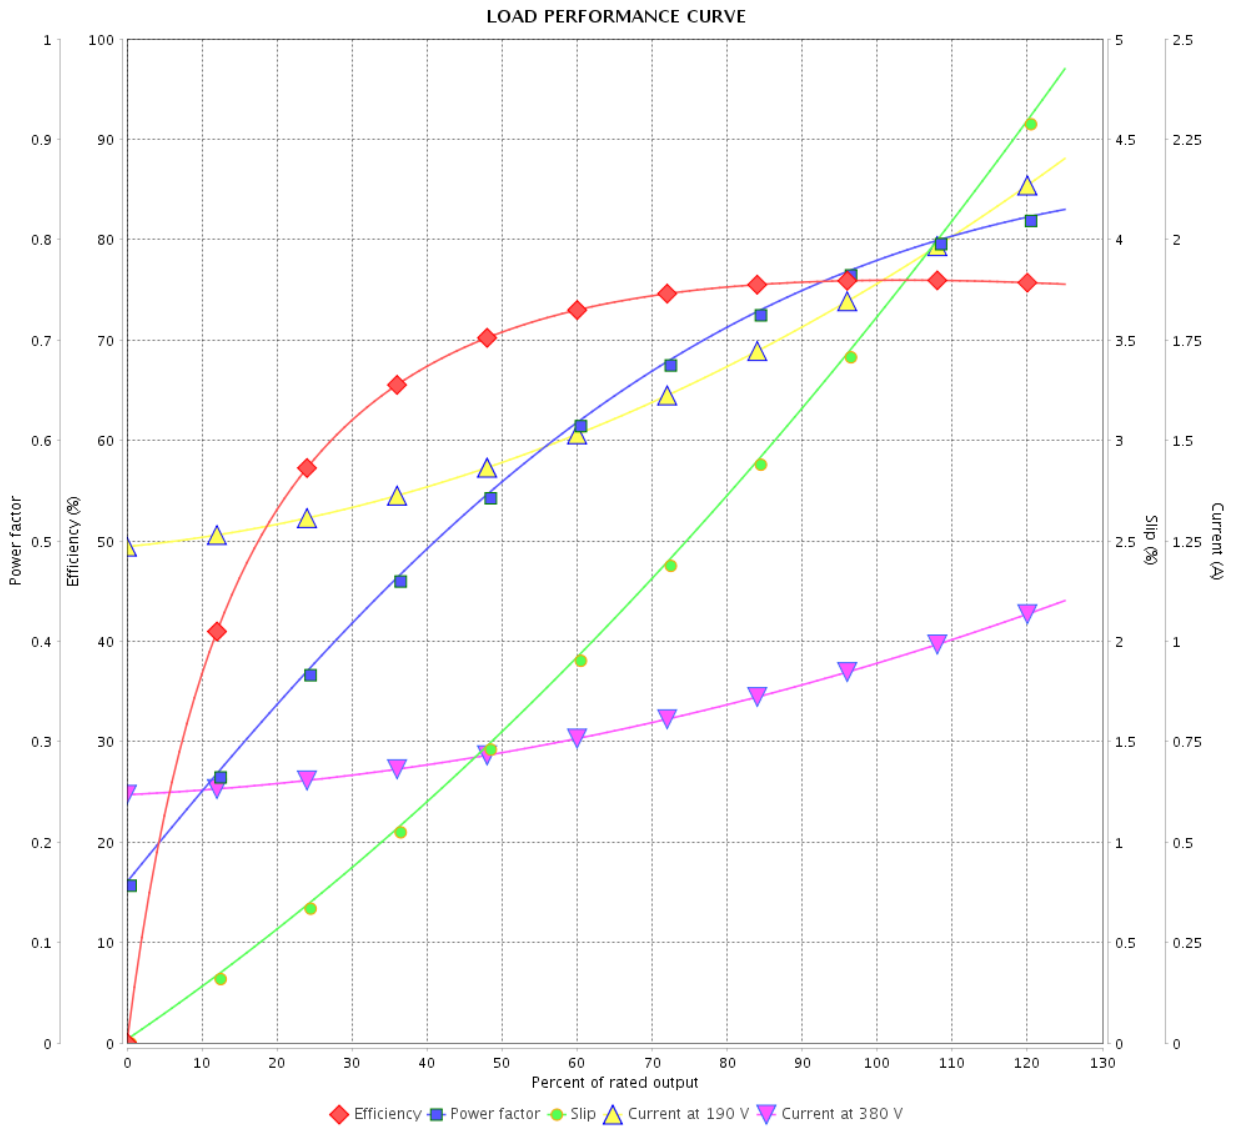

Performance : 190/380 V 50 Hz 4P

Rated current : 1.90/0.950 A
 LRC : 5.8
 Rated torque : 0.251 kgfm
 Locked rotor torque : 180 %
 Breakdown torque : 250 %
 Rated speed : 1445 rpm

Moment of inertia (J) : 0.0025 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Standard Efficiency Three-Phase Product code : 12895578

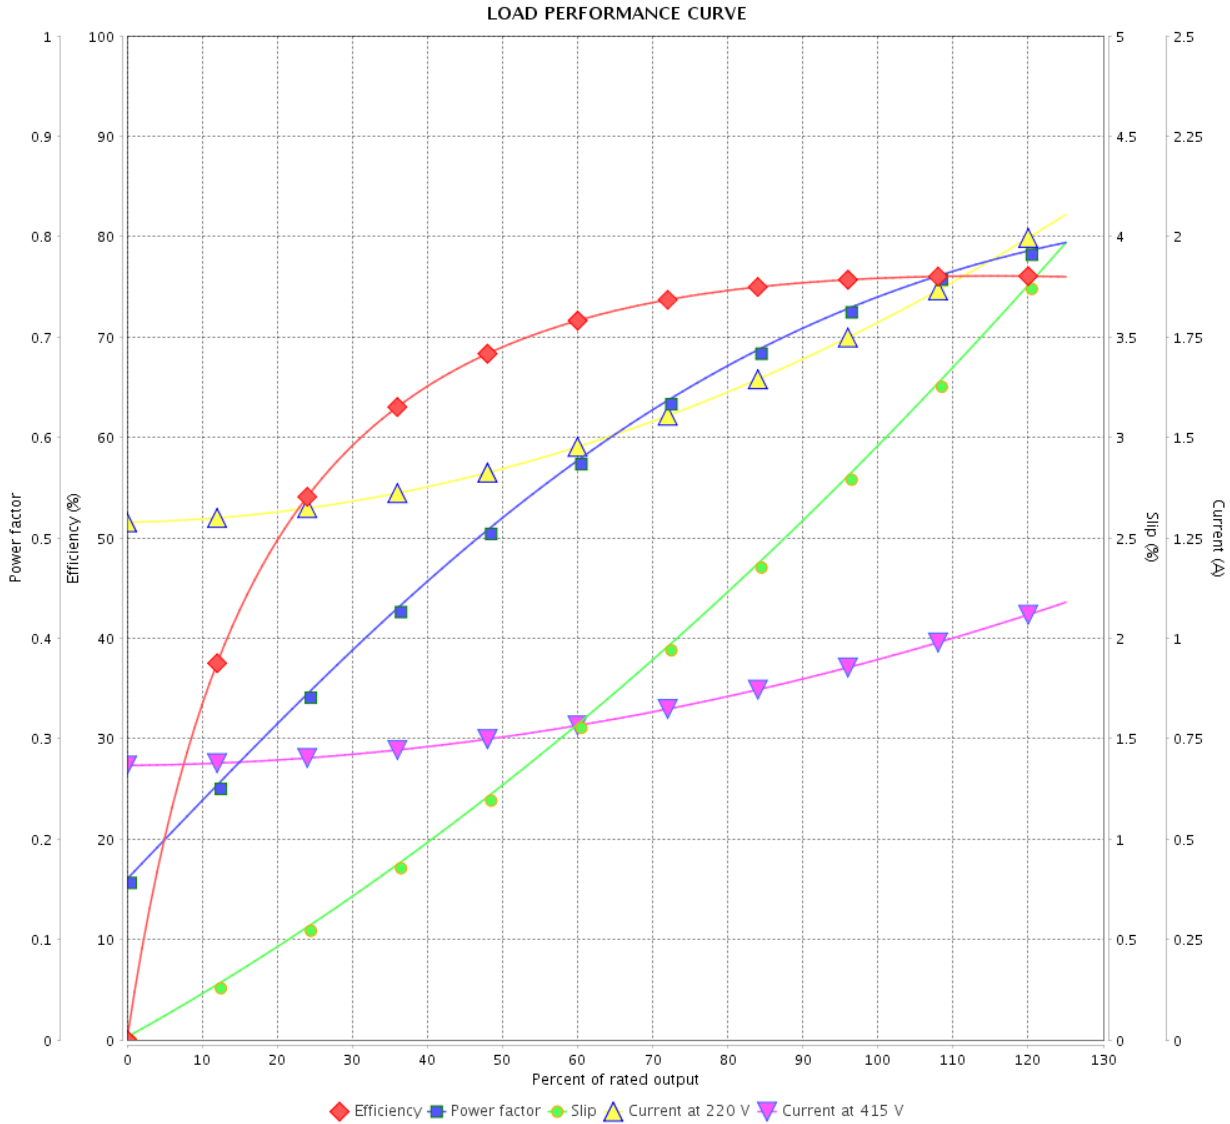

Performance : 220/415 V 50 Hz 4P

Rated current : 1.80/0.952 A
 LRC : 6.2
 Rated torque : 0.249 kgfm
 Locked rotor torque : 200 %
 Breakdown torque : 290 %
 Rated speed : 1455 rpm

Moment of inertia (J) : 0.0025 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				